


aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



# Fluoropolymer Extrusions

Fluid Handling & Electrical Insulation Products

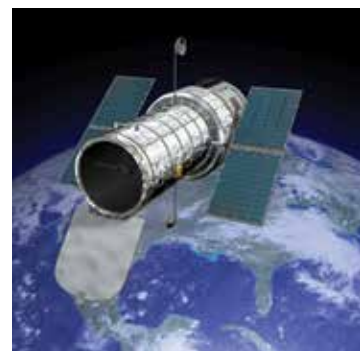

ENGINEERING YOUR SUCCESS.



## Table of Contents

|   |              |
|---|--------------|
| Fluoropolymer Tubing Overview .....     | 1-16         |
| Properties .....                        | 4            |
| Convolutd .....                         | 6            |
| Heatshrink .....                        | 9            |
| Nomenclature .....                      | 14           |
| <br><b>PFA Products</b>                 |              |
| High Purity PFA Smoothbore Tubing ..... | A02-A03      |
| PFA Smoothbore Tubing.....              | A04-A05      |
| Corrugated Tubing .....                 | B14          |
| Retractable Coiled Tubing .....         | B16          |
| <br><b>FEP Products</b>                 |              |
| Smoothbore Tubing.....                  | B01-B05      |
| Heat Shrink Tubing                      |              |
| 1.3:1 Fractional.....                   | B04          |
| 1.3:1 AWG.....                          | B05          |
| 1.67:1 .....                            | B06          |
| Rollcover .....                         | B08          |
| Double Shrink.....                      | B09          |
| Convolutd Tubing                        |              |
| FEP Convolutd .....                     | B10          |
| Convo-Flon™ .....                       | B10          |
| SAE AS81914/3 .....                     | B12          |
| Corrugated Tubing .....                 | B14          |
| Retractable Coiled Tubing .....         | B16          |
| <br><b>PTFE Products</b>                |              |
| Smoothbore Tubing                       |              |
| AWG .....                               | C08-C12      |
| Fractional.....                         | C02-C03, C06 |
| Metric .....                            | C02          |
| Beading .....                           | C13          |
| Spiral Wrap Tubing.....                 | C14          |
| Heat Shrink Tubing                      |              |
| 2:1 Fractional.....                     | C16          |
| 2:1 AWG.....                            | C18          |
| 4:1 Fractional.....                     | C22          |
| Convolutd Tubing                        |              |
| Convo-Tex®.....                         | C24          |
| Low Profile.....                        | C26          |
| Heavy Wall.....                         | C26          |
| SAE AS81914/1 .....                     | C28          |
| <br><b>PVDF Products</b>                |              |
| Smoothbore Tubing.....                  | D02          |
| <br><b>ETFE Products</b>                |              |
| Heat Shrink Tubing 1.5:1 .....          | E02          |
| Convolutd SAE AS81914/5 .....           | E04          |
| <br><b>Technical</b> .....              | F01          |
| <br><b>Warranty</b> .....               | F07          |
| <br><b>Offer of Sale</b> .....          | F11          |

# Fluoropolymer Tubing

PFA  
Tubing  
A

The Parflex Division's fluoropolymer tubing operation, located at Parker TexLoc® in Fort Worth, TX, specializes in the development and extrusion of fluoropolymer tubing for fluid handling applications. These products operate in high temperature applications up to 500°F (260°C) and in cryogenic applications with temperatures as low as -100°F (-75°C).

material available. Additionally, all of the tubing products are made from resins and colors that are certified to be free of mercury, heavy metals and other materials that are restricted in accordance with the RoHS directive. In fact, the quality engineered into our products makes them suitable for critical applications in the medical, pharmaceutical and instrumentation markets.

Working pressure is calculated at 73°F (23°C) using a Design Factor of 4 to 1. Special sizes, profiles, cut lengths and minimum continuous lengths are also available upon request.

Thank you for allowing us to serve your fluoropolymer needs.

FEP  
Tubing  
B

TexLoc® extrusions are resistant to UV radiation and moisture while offering the lowest coefficient of friction of any

All of the tables in this catalog are supplied with inch and mm sizes.



PTFE  
Tubing  
C



**Parflex Division  
Ravenna, Ohio**



**TexLoc® Facility  
Fort Worth, Texas**

PVDF  
Tubing  
D

ETFE  
Tubing  
E

Parflex PTFE, FEP, PFA and PVDF tubing complies with European Standard RoHS and are also FDA compliant to FDA regulation 21 CFR 177.1550, making these products suitable for use in food and beverage applications.

Parflex PTFE, FEP and PFA are listed VW-1 in the burning test for Underwriters Laboratories and pass the UL-83 vertical flame test. In a flame situation, PTFE, FEP and PFA tubing resist combustion and do not promote flame spread.

Technical  
Pages  
F

Index  
G




# Catalog Overview

All of the tubing in this catalog features a low coefficient of friction and anti-stick properties, high temperature capabilities and the most corrosion and chemical resistance of all polymers. Within normal use temperatures, fluoropolymers are attacked by so few chemicals that it is easier to describe the exceptions rather than list the chemicals they are compatible with (see Chemical Resistance Summary, pg. F04). In addition, these chemically inert tubes are non-wetting and non-leaching making them ideal for a wide range of fluid and material handling applications.

Parker TexLoc® fluoropolymer tubing is available in PTFE, FEP, PFA, High Purity PFA (H.P. PFA), ETFE and PVDF with some materials operating at temperatures up to 500°F (260°C). Each material has specific dominant characteristics, but all operate in high-temperature, corrosive environments.

Each catalog product page outlines Features, Certifications, Typical Applications and the Dimensional Data for each product. In addition, the following icons are used for quickly identifying typical markets. For markets not listed, contact Customer Service.

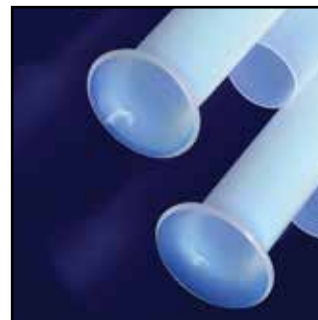

## Tubing Pressure Ranges

Tubing pressures are calculated at 73°F (23°C) and vary by material, tubing size and wall thickness. Please contact Customer Service for specific pressures.

## Icon Identification



Fluid  
Handling



Life  
Science



Industrial  
Pneumatic



Industrial  
Hydraulics



Food &  
Beverage



Transportation



Electrical



Military



Semiconductor

**All fluoropolymer tubing dimensions are continuously monitored to ensure an overall quality product. Most tubing sizes are packaged in convenient 25-ft., 50-ft., 100-ft. and 1,000-ft. lengths. Custom lengths are available upon request.**

For detailed ordering information, please consult price list or contact Parker TexLoc®.

Parker Hannifin Corporation | Parflex® Division, TexLoc® | Fort Worth, Tx | [www.texloc.com](http://www.texloc.com)



# Material Feature Overview

PFA  
Tubing  
A

## High Purity PFA pg. A02

- H.P. PFA (High Purity Perfluoroalkoxy) has the highest molecular weight available.
- Withstands corrosive surfactants for longer periods of time than standard products.
- Lowest level of extractables.

FEP  
Tubing  
B

## PFA pg. A04

- PFA (Perfluoroalkoxy) - When temperature and clarity are both factors, PFA is the resin of choice, offering the high-temperature attributes of PTFE, long continuous lengths, and almost as much clarity as FEP.
- High purity resins available.
- Low permeability.

PTFE  
Tubing  
C

## FEP pg. B02

- FEP (Fluorinated Ethylene Propylene) offers the highest clarity in the fluoropolymer market and is a close second to PTFE in chemical resistance.
- FEP is available in long, continuous lengths (1,000 feet and longer) , unlike PTFE, where the lengths range from 200 to 1,000 feet depending on size and wall thickness.

PVDF  
Tubing  
D

## PTFE pg. C02

- PTFE (Polytetrafluoroethylene) has the lowest coefficient of friction of any material known to man.
- PTFE tubing features unmatched chemical resistance and a non-stick surface that facilitates flow and eliminates media buildup.

ETFE  
Tubing  
E


## PVDF pg. D02

- PVDF (Polyvinylidene Fluoride) offers a combination of properties beneficial for use in many critical applications requiring chemical resistance with low permeability.
- PVDF exhibits low extractable levels while providing high mechanical strength and abrasion resistance.

Technical  
Pages  
F

## ETFE pg. E02

- ETFE (Ethylene Tetrafluoroethylene) has the best abrasion resistance in the fluoropolymer family.

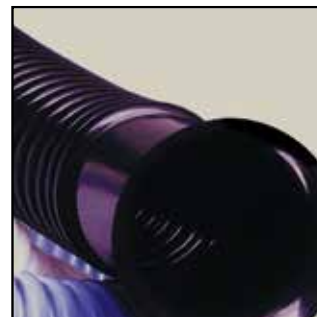

Fully Conductive and Conductive I.D. tubing in PTFE and PFA Full Conductive are available

Index  
G

# Smoothbore Tubing

## Smoothbore



Smoothbore is available in Fractional, Metric and AWG sizes in a variety of wall thicknesses.

### Features

- Low coefficient of friction
- Resists moisture
- ROHS compliant
- USP Class VI compliant
- FDA compliant
- VW-1 flammability rating
- Review material properties for additional features

### Options

- High Purity PFA, PFA, FEP, PTFE, PVDF
- Static Dissipative in Conductive I.D. or Fully Conductive
- Custom extrusions available
- Custom colors available
- Sizes range from .015" O.D. up to 4.0" O.D.

## Beading/Monofilament



Unlike a tube, beading is a solid polymer fiber. Beading/Monofilament is available in PTFE. See pg. C13

### Features

- Handles temperatures up to 500°F
- Non-stick surface
- Low coefficient of friction
- Excellent electrical insulator

### Options

- Custom extrusions available
- Custom colors available
- Sizes range from .015" O.D. up to .188" O.D.

## Colortrax™ (Custom order only)



Colortrax™ tubing provides instant - positive identification of lines without obstructing the view of the media flowing through the tube. Also, because the stripe runs the entire length of the tube, operators can easily distinguish one line from another without having to search for identification labels. Available in PTFE.

### Features

- Quick visual identification of lines
- Stripe is permanent, will not rub off
- Chemical resistant
- Handles temperatures up to 500°F
- Non-stick surface

### Options

- Up to 10 striping colors per tube
- Sizes range from .062" O.D. up to 1" O.D.

# Value Added Tubing Products

## Convolute



Product offerings include MIL Spec Convolute (SAE AS81914), Convo-Tex®, Wire Wrapped Convolute, Low Profile Convo (larger inside diameter for increased flow) and Heavy Wall Convo (thicker wall to handle more pressure).

### Features

- Available in PTFE, FEP, PFA and ETFE
- Seamless
- Very flexible
- Self draining
- Chemically inert
- Non-wetting
- USP Class VI compliant
- VW-1 flammability rating
- Review material properties for additional features

### Options

- Low Profile
- Heavy Wall
- Close convolution, reverse convolution and split loom available
- PTFE and PFA convoluted tubing are available as a conductive tube to dissipate static build-up and reduce the risk of discharge or explosion
- Wire wrapped tubing
- Cuffing is available to create an attachable end for adding fittings or flanges
- Colors are available on request
- Sizes range from 1/8" O.D. up to 4" O.D.

| Convolute Products             | Page # | Continuous Use Temperature       | Standard Color          | Comment   |
|--------------------------------|--------|----------------------------------|-------------------------|---|
| PTFE Convo-Tex®                | C24    | -100° to 500°F<br>-75° to 260°C  | Natural/<br>Milky White | <ul style="list-style-type: none"> <li>▪ Standard convoluted tubing</li> <li>▪ Static-Dissipative material available</li> <li>▪ Available with a variety of cuffing styles</li> <li>▪ Wire wrap available for increased flexibility and crush resistance</li> </ul> |
| PTFE Low Profile               | C26    | -100° to 500°F<br>-75° to 260°C  | Natural/<br>Milky White | <ul style="list-style-type: none"> <li>▪ Larger inside diameter for increased flow</li> <li>▪ Allows liquids to travel at a much faster rate</li> <li>▪ Promotes easy cleaning</li> </ul>   |
| PTFE Heavy Wall                | C26    | -100° to 500°F<br>-75° to 260°C  | Natural/<br>Milky White | <ul style="list-style-type: none"> <li>▪ Heavier wall - up to 33% more PTFE</li> <li>▪ Handles higher vacuum and pressures</li> <li>▪ Increased wall aids in the process of adding fittings, flanges or flaring</li> </ul>  |
| FEP Convolute                  | B12    | -100° to 400°F<br>-75° to 204°C  | Natural/<br>Clear       | <ul style="list-style-type: none"> <li>▪ Long continuous lengths</li> <li>▪ Translucent</li> <li>▪ Sized on the inside diameter</li> </ul>  |
| FEP Convo-Flon™                | B10    | -100° to 400°F<br>-75° to 204°C  | Natural/<br>Clear       | <ul style="list-style-type: none"> <li>▪ Long continuous lengths</li> <li>▪ Translucent</li> <li>▪ Sized on the outside diameter</li> </ul>   |
| SAE AS81914/1<br>SAE AS81914/2 | C28    | -100° to 500°F<br>-75° to 260°C  | Black                   | PTFE - /1 is standard convolution<br>/2 is close convolution  |
| SAE AS81914/3<br>SAE AS81914/4 | B12    | -100° to 400°F<br>-75° to 204°C  | Natural/<br>Clear       | FEP - /3 is standard convolution<br>/4 is close convolution<br>Can be supplied in long, continuous lengths  |
| SAE AS81914/5<br>SAE AS81914/6 | E04    | -148° to 348°F<br>-100° to 176°C | Natural/<br>Clear       | ETFE - /5 is close convolution<br>/6 is standard convolution<br>Extreme abrasion resistance   |

# Value Added Tubing Products

## Value-Added Capabilities for Convuluted Tubing

- Close convolutions
- Reverse convolutions
- Custom convolutions
- Bellows
- Cuffing
- Flanging
- Flaring
- Forming
- Tube slitting
- Prototyping
- Jacketing
- Slitting
- Wire reinforcement
- Assemblies with fittings

## Cuffing Styles



As Manufactured



Standard Cuff



Expanded Cuff



Reduced Cuff



Specified Degree Flare



90° Flanged End



Vacuum Wire on I.D.



Vacuum Wire on O.D.

## Property Comparison of Convuluted Tubing

| Properties  | PTFE                             | FEP                             | PFA                              | ETFE                           |
|---|----------------------------------|---------------------------------|----------------------------------|--------------------------------|
| Shore D Durometer Hardness  | D50-65                           | D55                             | D55-D60                          | D75                            |
| Specific Gravity  | 2.17                             | 2.15                            | 2.15                             | 1.70                           |
| Tensile Strength at Break (PSI)   | 2500                             | 3400                            | 3600                             | 6200                           |
| Elongation at Break (%)   | 200-400                          | 250-325                         | 280-300                          | 225-300                        |
| Min/Max Continuous Operating Temperature  | -450° to 500°F<br>-235° to 260°C | -100° to 400°F<br>-75° to 205°C | -450° to 500°F<br>-235° to 260°C | -88° to 302°F<br>-67° to 150°C |
| Vacuum at Room Temp. – Every 2° rise in temperature vacuum drops 1%<br>* Size 1/4" - 2" | *27 inch Hg at 73°F              |                                 |                                  |                                |
| Flammability  | Non-flammable                    |                                 |                                  |                                |

Convuluted Tubing is available in colors.

For detailed ordering information, please consult price list or contact Parker TexLoc®.

Parker Hannifin Corporation | Parflex® Division, TexLoc® | Fort Worth, Tx | [www.texloc.com](http://www.texloc.com)



PFA  
Tubing  
A

FEP  
Tubing  
B

PTFE  
Tubing  
C

PVDF  
Tubing  
D

ETFE  
Tubing  
E

Technical  
Pages  
F

G Index

# Value Added Tubing Products

## Fully Conductive & Conductive I.D. Tubing




For insulation purposes the high resistivity of plastics is an advantage but, in some cases, it can be a serious disadvantage as it results in high, static charge, build up; this in turn can result in dust pick-up and/or spark generation. The established way of improving conductivity is by adding a conductive filler such as a high structure, carbon black. The addition of lubricants can minimize the generation of static while the addition of some semi-incompatible liquids can cause static to leak away.

Parker TexLoc® offers a wide variety of anti-static and conductive convoluted tubing to fit each customer's specific needs. This tubing is supplied as a conductive liner or as a fully conductive tube.

Fully conductive tubes are available in PTFE and PFA. Industrial grade conductivity conforms to SAE AS81914 and MIL-DTL-27267C, having a minimum conductance of 10-20 micro amps with 1,000 vdc applied over a 14" length.

## Spiral Wrap

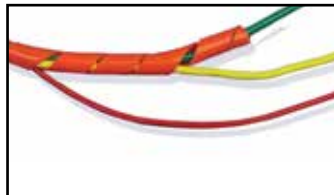

PTFE Spiral Wrap tubing provides harnessing for wire and cable while allowing leads at various points. See pg. C14.

### Features

- Available in PTFE
- Extremely flexible
- Non-stick surface for easy cleaning
- VW-1 flammability rating

### Options

- Available in Right or Left Hand cut
- Sizes range from 1/8" I.D. up to 1" I.D.

# Value Added Tubing Products

## Heat Shrinkable Tubing




Texflour® Fluoropolymer Heat Shrinkable Tubing is supplied in an expanded state, allowing easy slippage over instruments, fittings and other protrusions. When heated, the tubing conforms to the size and shape of the original object, providing a protective covering.

### Features

- Available in PTFE, FEP, ETFE and PFA
- Protects objects from abrasion, shock and high temperatures
- Most products meet AMS-DTL-23053
- Double shrink encapsulates objects to create a moisture barrier
- USP Class VI compliant

### Options

- PTFE 2:1 PTFE 4:1
- FEP 1.3:1 FEP 1.67:1 FEP Roll Cover
- ETFE 1.5/1
- Double Shrink
- Custom heat shrink available
- Custom colors available
- Sizes range from .034" expanded I.D. up to 6" expanded I.D. depending on style

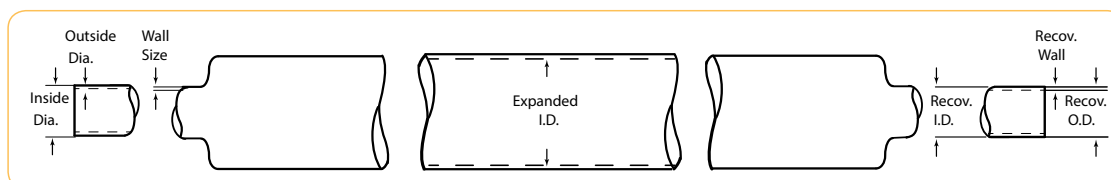

| Standard Heat Shrink Products                    | Page # | Continuous Use Temperature       | Shrink Temperature  |
|--|--------|----------------------------------|---|
| PTFE 2:1 H.S., Standard Wall – Insulation        | C19    | -100°F to 500°F (-75°C to 260°C) | 662°F (350°C) for 10/minutes                                      |
| PTFE 2:1 H.S., Thin Wall – Insulation            | C20    |                                  |   |
| PTFE 2:1 H.S., Light Wall – Insulation           | C21    |                                  |   |
| PTFE 2:1 H.S., Fractional Insulation, SW & TW    | C17    |                                  |   |
| PTFE 4:1 H.S., 4:1 Shrink                        | C22    |                                  |   |
| FEP H.S., 1.3:1 Shrink                           | B04    | -100°F to 400°F (-75°C to 205°C) | 1" Dia. and below – 410°F (210°C)<br>Over 1" Dia. – 430°F (221°C) |
| FEP H.S., 1.6:1 Shrink                           | B06    |                                  |   |
| FEP Roll Cover                                   | B08    | -100°F to 400°F (-75°C to 205°C) | 347°F (175°C) for 10/minutes                                      |
| PTFE/FEP Double Shrink (PTFE Outside-FEP Inside) | B09    | -100°F to 450°F (-75°C to 231°C) | 680°F (360°C)   |
| Custom Heat Shrink Products                      |        | Continuous Use Temperature       | Shrink Temperature  |
| PTFE 2:1 H.S., Heavy Wall, Quoted on Request     | C17    | -100°F to 500°F (-75°C to 260°C) | 662°F (350°C) for 10/minutes                                      |
| ETFE H.S., 1.5:1 Shrink, Quoted on Request       | E02    | -100°F to 302°F (-75°C to 150°C) | 347°F (175°C) for 10/minutes                                      |
| PFA Heat Shrink, Quoted on Request               | *      | -100°F to 500°F (-75°C to 260°C) | 400°F (204°C) for 10/minutes                                      |

\* Contact Customer Service

For detailed ordering information, please consult price list or contact Parker TexLoc®.

Parker Hannifin Corporation | Parflex® Division, TexLoc® | Fort Worth, Tx | [www.texloc.com](http://www.texloc.com)



# Value Added Products

## Corrugated



Tex-Flex® FEP corrugated tubing from Parker TexLoc® is capable of turning sharp corners with very small bend diameters without kinking. The bend diameter is almost 4x smaller than a typical smoothbore tube of the same size. See pg. B14.

### Features

- Available in FEP, PFA & High Purity PFA
- Extremely flexible
- Non-stick surface for easy cleaning
- Chemical resistant

### Options

- Cuffing is available to create an attachable end for adding fittings or flanges
- Sizes range from 1/4" I.D. up to 2-1/2" I.D.

## Retractable Coils (Custom order only)



Parker TexLoc® fluoroplastic coiled tubing is a spiral formed tube manufactured in FEP or PFA that consists of a single or double retractable coil in a single tube. FEP retractable tubes hold their shape and remain stable up to 200°F, PFA up to 300°F. See pg. B16.

### Features

- Available in FEP, PFA & High Purity PFA Custom engineered to fit your application
- Chemical resistant
- >0.01% moisture absorption

### Options

- Dual containment designs available
- lengths up to 4 feet compressed (12 feet expanded)
- Sizes range from 1/16" O.D. up to 2" O.D.

## Paratubing (Custom order only)



Fluoroplastic Paratubing, from Parker TexLoc®, is a unique tube consisting of 2 to 4 tubes longitudinally thermally welded to create one conduit consisting of multiple individual tubes. Paratubing offers the ability to run several fluid lines as one entity and then split the tubes apart for branching to different connectors when needed.

### Features

- Handles temperatures up to 500°F
- Reduces tangling and kinking
- Clear tubes allow for operator inspection

### Options

- FEP or PFA
- Custom extrusions available
- Custom colors available
- Sizes range from 1/16" O.D. up to 3" O.D.

# Value Added Services

Secondary operations are offered on-site are:

- Beading
- Convoluting
- Corrugating
- Cuffing
- Custom Assembly
- Custom Shrinking
- Cutting
- Drilling
- Etching
- Flanging
- Flaring
- Forming
- Heat Shrink
- Jacketing
- Kitting
- Marking
- Perforations
- Profiles
- Retractable Tubing
- Scoring
- Tube Slitting
- Tubing assemblies with fittings
- Welded Tubing
- Wire reinforcement



Etching




Assembling



Custom Shrinking



Convoluted Tubing



Corrugated Tubing



Forming



Tubing Assemblies



Scoring




Profiles



Welded Tubing



Marking



Drilling




Cutting



Retractable Tubing



Kitting



Flaring/Flanging

For detailed ordering information, please consult price list or contact Parker TexLoc®.

Parker Hannifin Corporation | Parflex® Division, TexLoc® | Fort Worth, Tx | [www.texloc.com](http://www.texloc.com)



# Applications

| Product Family    | Type              | Page              | Part Number Series                             | Typical Applications   |  | Typical Markets  |   |
|-------------------|-------------------|-------------------|--|--|--|--|---|
| PFA               | Smoothbore*       | A05               | 104  | Air Sampling<br>Gas Purge<br>Wet bench   |  | Chemical Laboratory  | Environmental Fluid Handling                  |
|                   |                   | A05               | 204  | Flow Monitoring<br>Steam Plant   |  | Semiconductor Instrumentation  | Gas Service<br>Pharmaceutical<br>Life Science |
|                   | Convoluted*       | B10               | Custom   | Fluid Transfer<br>Gas Sampling   |  | Semiconductor Instrumentation  | Laboratory                                    |
|                   | Retractable Coils | B16               | 704<br>705                                     | Instrumentation<br>Flow Monitoring System  | Chemical Dispensers<br>Heat Exchangers | Semiconductor Instrumentation  | Laboratory                                    |
| High Purity PFA   | Smoothbore        | A03               | 105  | High purity applications<br>DI recirculators<br>DI water dispensers                |  | Chemical Laboratory  | Environmental Fluid Handling                  |
|                   |                   | A03               | 205  | Gas Transfer<br>Wet bench  |  | Semiconductor Instrumentation  | Gas Service<br>Pharmaceutical<br>Life Science |
| FEP               | Smoothbore        | B03               | 103  | Nitrogen Filling<br>Downhole Pump  | Hearing Aid<br>Optical Sensors         | UV Applications<br>Chemical Instrumentation<br>Laboratory<br>Food & Beverage                 | Fluid Handling<br>Gas Sampling                |
|                   |                   | B03               | 203  | Ozone Sampling   |  |  | Pharmaceutical<br>Robotics<br>Life Science    |
|                   | Heat Shrink       | B04<br>B06<br>B08 | HS1.3<br>HS1.6<br>HS1.25                       | Protective Covering<br>UV Light Covering<br>Product Testing                        | Paper Rollers<br>Ink Rollers           |  |   |
|                   |                   | B09               | TSSS<br>TSSL                                   | Protective Covering<br>Wire Splices  | Fitting Encapsulation                  |  |   |
|                   | Convoluted        | B10<br>B12        | CV03<br>81914                                  | Fluid Transfer<br>Gas Sampling   | Wire Harnessing                        |  |   |
|                   | Corrugated        | B14               | CR03   | Robots<br>Fluid Handling   | Automation                             |  |   |
| Retractable Coils | B16               | 703               | DI Water<br>Heat Exchangers<br>Instrumentation | Flow Monitoring System<br>DI recirculators<br>Pure Chemical Dispensers             |  |  |   |
| PTFE              | Beading           | C13               | TFB  | Pull Cord<br>O-Ring Seals  | Spacers<br>Woven Filter                | Chemical Instrumentation<br>Food & Beverage<br>Electrical Insulation<br>Industrial Equipment | Military Laboratory                           |
|                   | Smoothbore        | C08               | AWG<br>TFH, TFS, TFT, TFL                      | Electrical Insulation<br>Protective Cover  | Circuit Board<br>Wire Insulation       |  | Fluid Handling                                |
|                   |                   | C06               | Fractional<br>TFH, TFS, TFT, TFL               |  |  |  | Gas Sampling<br>Life Science                  |
|                   | Smoothbore*       | C02<br>C02        | 101<br>201                                     | Electrical Insulation<br>Fluid Transfer  | Gas Sampling<br>Laboratory             |  |   |
|                   | Spiral Cut        | C14               | TSWTF  | Electrical Insulation<br>Harnessing  |  |  |   |
|                   | Convoluted*       | C24<br>C26<br>C28 | CV01<br>CVL01 & CVH01<br>81914                 | Electrical Insulation<br>Fluid Transfer<br>Wire Harnessing                         |  |  |   |
|                   | Heat Shrink       | C16<br>C18<br>C22 | Fractional HS2T<br>AWG HS2T<br>HS4T            | Electrical Insulation<br>Laboratory  |  |  |   |
| PVDF              | Smoothbore        | D02<br>D02        | 110<br>111                                     | Thermal Cycling<br>Outdoor/Extreme Conditions<br>Applications with long cycle life | Water Systems                          | Chemical Gas   | Food Environmental                            |
| ETFE              | Heat Shrink       | E02               | HS1.5  | Protective Covering<br>Ink Rollers   |  | Chemical Instrumentation<br>Laboratory   | Life Science<br>Transportation<br>Cryogenics  |
|                   | Convoluted        | E04               | 81914  | Fluid Transfer<br>Wire Harnessing  |  |  |   |

\* Also available in conductive (static-dissipative) option

# Chemical Resistance Summary



Within normal use temperatures, fluoroplastics are attacked by so few chemicals that it is easier to describe the exceptions rather than list the chemicals they are compatible with.

## DO NOT USE FLUOROPLASTICS WITH THE FOLLOWING:

- Alkali metals such as elemental sodium, potassium, lithium, etc. The alkali metals remove fluorine from the polymer molecule.
- Extremely potent oxidizers, fluorine (F<sub>2</sub>) and related compounds (e.g., chlorine trifluoride, ClF<sub>3</sub>). These can be handled by fluoropolymers, but only with great care, as fluorine is absorbed into the resins, and the mixture becomes sensitive to a source of ignition such as impact.
- 80% NaOH (Sodium Hydroxide) or KOH (Potassium Hydroxide), metal hydrides such as Boranes (e.g., B<sub>2</sub>H<sub>6</sub>), Aluminum Chloride, Ammonia (NH<sub>3</sub>), certain Amines (R-NH<sub>2</sub>) and imines (R=NH) and 70% Nitric Acid at temperatures near the suggested service limit.



## WARNING

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.



PFA  
Tubing  
**A**

FEP  
Tubing  
**B**

PTFE  
Tubing  
**C**

PVDF  
Tubing  
**D**

ETFE  
Tubing  
**E**

Technical  
Pages  
**F**

G Index

# Nomenclature

## Smoothbore Fractional and Metric Tubing

| 105-0250062 - N T -   |                        |                                 |                               | 100  |  |
|-----------------------|------------------------|---------------------------------|-------------------------------|--|--|
|                       |                        | <u>Outside Diameter</u>         | <u>Wall Thickness</u>         |  |  |
|                       |                        | 0250 = .250 inch<br>0700 = 7 mm | 062 = .062 inch<br>100 = 1 mm |  |  |
|                       |                        |                                 |                               | <u>Tube Packaging</u>  | <u>Length</u>  |
|                       |                        |                                 |                               | T = Bulk<br>Default Configuration<br><br>C = Tube Cut Job<br>(followed by cut length in inches)  | 25 = 25 ft coil<br>50 = 50 ft coil<br>100 = 100 ft coil<br>1000 = 1000 ft coil<br>Blank = No cut<br>xx.xxx = Length (inch) |
|                       |                        |                                 |                               | <u>Tubing Color Options*</u>   |  |
|                       |                        |                                 |                               | N = Natural<br>0 = Black<br>1 = Brown<br>2 = Red<br>3 = Orange<br>4 = Yellow<br>5 = Green<br>6 = Blue<br>7 = Violet<br>8 = Gray<br>9 = White |  |
| <u>Product Family</u> | <u>Resin Family</u>    |                                 |                               | <u>Configuration</u>   |  |
| 1 = Fractional        | 01 = PTFE              |                                 |                               | Blank = No color   |  |
| 2 = Metric            | 03 = FEP               |                                 |                               | C = Colored Solid Tube   |  |
| 7 = Retractable Coil  | 04 = PFA               |                                 |                               | S = Colored Stripe on Tube   |  |
| 9 = Custom            | 05 = PFA High Purity   |                                 |                               | L = Laser Marked   |  |
|                       | 10 = PVDF: Flex™       |                                 |                               |  |  |
|                       | 11 = PVDF: Super-Flex™ |                                 |                               |  |  |
|                       | 12 = ETFE NONSTANDARD  |                                 |                               |  |  |
|                       | 13 = PEEK® NONSTANDARD |                                 |                               |  |  |

## Convolute and Corrugated Tubing

| CV01- 1/8ID- 88-1.5-2C     |                     |                                 |                                 |                              |
|----------------------------|---------------------|---------------------------------|---------------------------------|------------------------------|
| <b>Convolution Profile</b> | <b>Resin Family</b> | <b>Tubing I.D. or O.D. Size</b> |                                 | <b>Special Configuration</b> |
|                            |                     | x/x = below 1"                  |                                 | Blank = Default              |
|                            |                     | x.xx = 1" and up                |                                 | FC = Fully Conductive        |
|                            |                     |                                 | <b>Overall Length in inches</b> | CI = Conductive I.D.         |
|                            |                     |                                 |                                 | <b>Cuff Length in inches</b> |
|                            |                     |                                 | <b>Cuff and Options</b>         |                              |
|                            |                     |                                 | Blank = No cuffs                |                              |
|                            |                     |                                 | XX.XXX-1C = 1 Cuff              |                              |
|                            |                     |                                 | XX.XXX-2C = 2 Cuffs             |                              |

# Nomenclature

## Heat Shrink, Electrical Insulation Tubing and Beading

# HS2\*\* T F T 1/8 - N T\*\*\*

| Special Configurations    |  | Tubing Configurations |  | Tubing Color Options* |  | Configuration              |  |
|---------------------------|--|-----------------------|--|-----------------------|--|----------------------------|--|
| Blank if Smooth Bore      |  | H = Heavy Wall        |  | N = Natural           |  | Blank = No color           |  |
| HS2 = 2:1 Ratio PTFE      |  | S = Standard Wall     |  | 0 = Black             |  | C = Colored Solid Tube     |  |
| HS4 = 4:1 Ratio PTFE      |  | T = Thin Wall         |  | 1 = Brown             |  | S = Colored Stripe on Tube |  |
| HS1.3 = 1.3.1:1 Ratio FEP |  | L = Light Wall        |  | 2 = Red               |  |                            |  |
| HS1.6 = 1.67:1 Ratio FEP  |  | I = Industrial Wall   |  | 3 = Orange            |  |                            |  |
| HS1.25 = 1.25:1 Ratio FEP |  | B = Beading           |  | 4 = Yellow            |  |                            |  |
| TSW = Spiral Wrap         |  |                       |  | 5 = Green             |  |                            |  |
|                           |  |                       |  | 6 = Blue              |  |                            |  |
|                           |  |                       |  | 7 = Violet            |  |                            |  |
|                           |  |                       |  | 8 = Gray              |  |                            |  |
|                           |  |                       |  | 9 = White             |  |                            |  |

\*When ordering coiled tubing in colors, the color code is always followed by TC;  
when ordering cut lengths, the color code is followed by CC....ie HS2TFT1/8-2TC ..ie HS1.3FEP24-OCC48.000.

\*\*This first configuration is only used for heat shrinkable tubing or spiral wrap. For example, electrical insulation tubing part number would read TFT-1/8-NT.

\*\*\*When changing to cut length, replace the T with C and specify the length in inches. If this part was cut to 4 feet, part number would read TFT-1/8-NC48.000.


Sizes for heat shrink designate the size of the heat shrink tube as stated by the applicable specification. The actual O.D. of the tubing does not always match the size. Review actual tables to see the true expanded dimension of the tube.

# Notes



# High Purity PFA Tubing

## Series Fractional & Metric: 105, 205

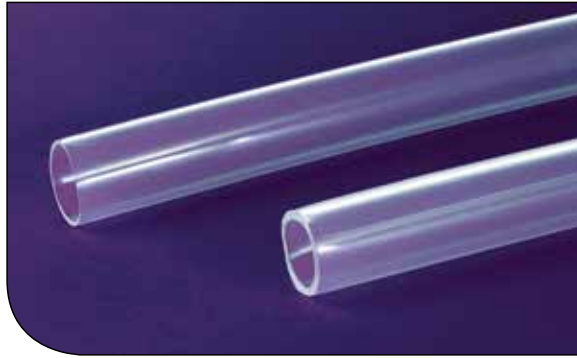

### Features

- Withstands corrosive surfactants for longer periods of time
- Highest molecular weight available
- Lowest level of extractables
- Low permeability
- Exceptional heat resistance
- Chemically inert
- Long continuous lengths
- Low coefficient of friction
- Self extinguishing
- Non leaching

### Certifications/Compliance

- ASTM D3307-10
- VW-1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant

### Applications/Markets



- Flow Monitoring
- Gas Transfer
- Food
- Wet Bench
- DI Water Dispensers
- DI Recirculators
- Heat Exchangers
- Pure Chemical Dispensers
- High Purity Applications

### Order Information

**Example: 105-0375031-N-100**

**105-0375031-N-100 – Fractional**

**105-0375031-N-100 – High Purity PFA**

**105-0375031-N-100 – Tube O.D. in millimeters (3/8")**

**105-0375031-N-100 – Tube Wall Thickness in millimeters (.031")**

**105-0375031-N-100 – Natural**

**105-0375031-N-100 – Package Quantity in feet (100')**

### Fittings

Fittings available for sizes 4mm up to 12mm

Parker Fittings available from:  
Fluid System Connectors Division  
Otsego, MI

(269) 694-2550

(269) 692-6634 FAX

FSC Product Families:

- Compression
- Compress-Align®
- Fast & Tite
- TrueSeal™

### Notes

- Working Temperature:  
-100°F to 500°F (-75°C to 260°C) Working pressure calculated using a Design Factor of 4 at 73°F (23°C)
- Custom packaging and sizes are quoted upon request
- Package quantities are not continuous









### Options

- Smoothbore
- Convoluted
- Corrugated
- Retractable Coils









### Colors

- Natural, Translucent









## 105 High Purity PFA Industrial Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |         |      |         | Nominal I.D.  |         |      |         | Reference Wall  |      | Working Pressure   |          | Burst Pressure  |          | Min. Bend Radius  |    | Vac. Rating | Weight  |   |
|-------------|------------|---|---------|------|---------|---|---------|------|---------|---|------|--|----------|---|----------|---|----|-------------|---|---|
| #           |            |  |         |      |         |  |         |      |         |  |      |  |          |  |          |  |    |             |  |  |
|             | inch       | inch  | tol.    | mm   | tol.    | inch  | tol.    | mm   | tol.    | inch  | mm   | psi 73°F   | bar 23°C | psi 73°F  | bar 23°C | inch  | mm | at 73°F     | lb. per ft.   | kg. per m.  |
| 105-0125031 | 1/8        | 0.125   | ± 0.004 | 3.18 | ± 0.102 | 0.064   | ± 0.004 | 1.63 | ± 0.102 | 0.031   | 0.79 | 500  | 34       | 2000  | 138      | 0.500   | 13 | 28          | 0.009   | 0.013   |
| 105-0188031 | 3/16       | 0.188   | ± 0.005 | 4.78 | ± 0.127 | 0.125   | ± 0.005 | 3.18 | ± 0.127 | 0.031   | 0.79 | 320  | 22       | 1280  | 88       | 0.750   | 19 | 28          | 0.014   | 0.021   |
| 105-0250031 | 1/4        | 0.250   | ± 0.005 | 6.35 | ± 0.127 | 0.188   | ± 0.005 | 4.78 | ± 0.127 | 0.031   | 0.79 | 230  | 16       | 920   | 63       | 1.000   | 25 | 28          | 0.020   | 0.030   |
| 105-0375031 | 3/8        | 0.375   | ± 0.005 | 9.52 | ± 0.127 | 0.312   | ± 0.005 | 7.92 | ± 0.127 | 0.031   | 0.79 | 140  | 10       | 560   | 39       | 3.500   | 89 | 28          | 0.031   | 0.047   |

## 105 High Purity PFA Heavy Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |         |       |         | Nominal I.D.  |         |       |         | Reference Wall  |      | Working Pressure   |          | Burst Pressure  |          | Min. Bend Radius  |     | Vac. Rating | Weight  |   |
|-------------|------------|---|---------|-------|---------|---|---------|-------|---------|---|------|--|----------|---|----------|---|-----|-------------|---|---|
| #           |            |  |         |       |         |  |         |       |         |  |      |  |          |  |          |  |     |             |  |  |
|             | inch       | inch  | tol.    | mm    | tol.    | inch  | tol.    | mm    | tol.    | inch  | mm   | psi 73°F   | bar 23°C | psi 73°F  | bar 23°C | inch  | mm  | at 73°F     | lb. per ft.   | kg. per m.  |
| 105-0250040 | 1/4        | 0.250   | ± 0.005 | 6.35  | ± 0.127 | 0.170   | ± 0.005 | 4.32  | ± 0.127 | 0.040   | 1.02 | 300  | 21       | 1200  | 83       | 0.938   | 24  | 28          | 0.025   | 0.037   |
| 105-0250047 | 1/4        | 0.250   | ± 0.005 | 6.35  | ± 0.127 | 0.156   | ± 0.005 | 3.96  | ± 0.127 | 0.047   | 1.19 | 370  | 26       | 1480  | 102      | 0.500   | 13  | 28          | 0.028   | 0.042   |
| 105-0250062 | 1/4        | 0.250   | ± 0.005 | 6.35  | ± 0.127 | 0.125   | ± 0.005 | 3.18  | ± 0.127 | 0.062   | 1.57 | 500  | 34       | 2000  | 138      | 0.625   | 16  | 28          | 0.034   | 0.051   |
| 105-0375062 | 3/8        | 0.375   | ± 0.005 | 9.52  | ± 0.127 | 0.250   | ± 0.005 | 6.35  | ± 0.127 | 0.062   | 1.57 | 320  | 22       | 1280  | 88       | 1.125   | 29  | 28          | 0.057   | 0.085   |
| 105-0500062 | 1/2        | 0.500   | ± 0.005 | 12.70 | ± 0.127 | 0.375   | ± 0.005 | 9.53  | ± 0.127 | 0.062   | 1.57 | 230  | 16       | 920   | 63       | 2.250   | 57  | 28          | 0.079   | 0.119   |
| 105-0750062 | 3/4        | 0.750   | ± 0.006 | 19.05 | ± 0.152 | 0.625   | ± 0.006 | 15.88 | ± 0.152 | 0.062   | 1.57 | 140  | 10       | 560   | 39       | 4.250   | 108 | 28          | 0.125   | 0.186   |
| 105-1000062 | 1          | 1.000   | ± 0.010 | 25.40 | ± 0.254 | 0.875   | ± 0.010 | 22.22 | ± 0.254 | 0.062   | 1.57 | 100  | 7        | 400   | 28       | 8.000   | 203 | *           | 0.170   | 0.254   |


## 205 Metric High PFA Tubing

| Part Number | Order Size | Nominal O.D.  |        |       |         | Nominal I.D.  |        |       |         | Reference Wall  |       | Working Pressure   |          | Burst Pressure  |          | Min. Bend Radius  |       | Vac. Rating | Weight  |   |
|-------------|------------|---|--------|-------|---------|---|--------|-------|---------|---|-------|--|----------|---|----------|---|-------|-------------|---|---|
| #           |            |  |        |       |         |  |        |       |         |  |       |  |          |  |          |  |       |             |  |  |
|             | mm         | mm  | tol.   | inch  | tol.    | mm  | tol.   | inch  | tol.    | mm  | inch  | bar 23°C   | psi 73°F | bar 23°C  | psi 73°F | mm  | inch  | at 73°F     | kg. per m.  | lb. per ft.   |
| 205-0300100 | 3          | 3   | ± 0.11 | 0.118 | ± 0.004 | 1   | ± 0.11 | 0.039 | ± 0.004 | 1   | 0.039 | 47   | 680      | 188   | 2720     | 13  | 0.500 | 28          | 0.014   | 0.009   |
| 205-0400100 | 4          | 4   | ± 0.11 | 0.157 | ± 0.004 | 2   | ± 0.11 | 0.079 | ± 0.004 | 1   | 0.039 | 34   | 500      | 138   | 2000     | 13  | 0.500 | 28          | 0.020   | 0.020   |
| 205-0600100 | 6          | 6   | ± 0.11 | 0.236 | ± 0.004 | 4   | ± 0.11 | 0.157 | ± 0.004 | 1   | 0.039 | 22   | 320      | 88  | 1280     | 22  | 0.875 | 28          | 0.034   | 0.023   |
| 205-0800100 | 8          | 8   | ± 0.11 | 0.315 | ± 0.004 | 6   | ± 0.11 | 0.236 | ± 0.004 | 1   | 0.039 | 16   | 230      | 63  | 920      | 35  | 1.375 | 28          | 0.047   | 0.032   |
| 205-1000100 | 10         | 10  | ± 0.11 | 0.393 | ± 0.004 | 8   | ± 0.11 | 0.315 | ± 0.004 | 1   | 0.039 | 12   | 180      | 50  | 720      | 51  | 2.000 | 28          | 0.061   | 0.041   |
| 205-1200100 | 12         | 12  | ± 0.15 | 0.472 | ± 0.006 | 10  | ± 0.15 | 0.394 | ± 0.006 | 1   | 0.039 | 10   | 140      | 39  | 560      | 89  | 3.500 | 28          | 0.074   | 0.050   |

For detailed ordering information, please consult price list or contact Parker TexLoc®.

# PFA Tubing

## Series Fractional & Metric: 104, 204

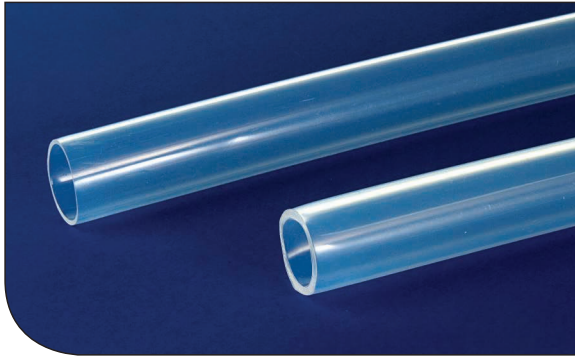

### Features

- Virgin Perfluoroalkoxy
- Translucent
- High purity resins available
- Low permeability
- Exceptional heat resistance
- Chemically inert
- Long continuous lengths
- Low coefficient of friction
- Self extinguishing
- Non-wetting
- Non leaching

### Certifications/Compliance

- ASTM D3307-10
- VW-1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant

### Applications/Markets



- Air Sampling
- Gas Sampling
- Fluid Transfer
- Laboratory
- Wet Bench
- Flow Monitoring
- Steam Plant

### Order Information

**Example: 104-0188062-NT-100**

**104-0188062-NT-100 – Fractional**

**104-0188062-NT-100 – PFA**

**104-0188062-NT-100 – Tube O.D. in inches (3/16")**

**104-0188062-NT-100 – Tube Wall Thickness in inches (.062")**

**104-0188062-NT-100 – Natural**

**104-0188062-NT-100 – Package Quantity in feet (100')**

### Fittings

Fittings available for sizes 3/32" up to 1"

Parker Fittings available from: Fluid System Connectors Division  
Otsego, MI (269) 692-6555 (269) 692-6634 FAX

FSC Product Families:

- Compression
- Compress-Align®
- Metric Compression
- TrueSeal™

### Notes

- Working Temperature: -100°F (-75°C) to +500°F (260°C)
- Working pressure calculated using a Design Factor of 4 at 73°F (23°C)
- Custom packaging and sizes are quoted upon request
- Package quantities are not continuous

### Options


- Retractable Coils
- Heat Shrink
- Smoothbore
- Convuluted
- Corrugated

### Colors







- ○ Natural, Translucent
- Colors available as custom run, see color code table
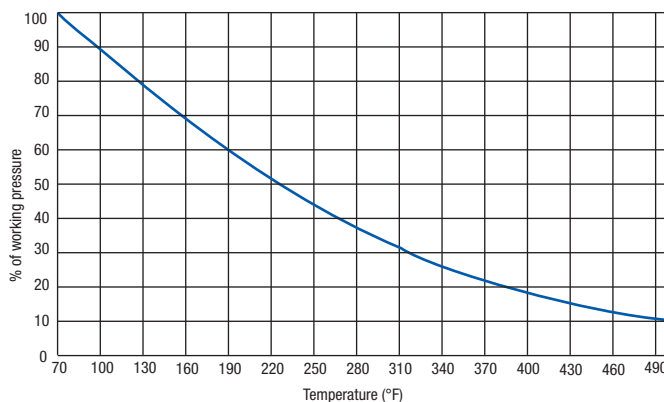
| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |







### PFA Tubing (Series 104, 204) Maximum Working Pressure (bar)











## 104 PFA Industrial Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |        |       |        | Nominal I.D.  |        |       |        | Reference Wall  |      | Working Pressure  |          | Burst Pressure  |          | Min. Bend Radius  |     | Vac. Rating | Weight  |   |
|-------------|------------|---|--------|-------|--------|---|--------|-------|--------|---|------|---|----------|---|----------|---|-----|-------------|---|---|
| #           |            |  |        |       |        |  |        |       |        |  |      |  |          |  |          |  |     |             |  |  |
|             | inch       | inch  | tol.   | mm    | tol.   | inch  | tol.   | mm    | tol.   | inch  | mm   | psi 73°F  | bar 23°C | psi 73°F  | bar 23°C | inch  | mm  | at 73°F     | lb. per ft.   | kg. per m.  |
| 104-0094031 | 3/32       | 0.094   | ±0.004 | 2.40  | ±0.102 | 0.031   | ±0.002 | 0.79  | ±0.051 | 0.031   | 0.79 | 680   | 47       | 2720  | 188      | 0.250   | 6   | 28          | 0.006   | 0.009   |
| 104-0125031 | 1/8        | 0.125   | ±0.004 | 3.18  | ±0.102 | 0.064   | ±0.004 | 1.63  | ±0.102 | 0.031   | 0.79 | 500   | 34       | 2000  | 138      | 0.375   | 10  | 28          | 0.009   | 0.013   |
| 104-0156031 | 5/32       | 0.157   | ±0.005 | 3.99  | ±0.127 | 0.094   | ±0.003 | 2.39  | ±0.076 | 0.031   | 0.79 | 390   | 27       | 1560  | 108      | 0.625   | 16  | 28          | 0.011   | 0.017   |
| 104-0188031 | 3/16       | 0.188   | ±0.005 | 4.78  | ±0.127 | 0.125   | ±0.005 | 3.18  | ±0.127 | 0.031   | 0.79 | 320   | 22       | 1280  | 88       | 0.625   | 16  | 28          | 0.014   | 0.021   |
| 104-0250031 | 1/4        | 0.250   | ±0.005 | 6.35  | ±0.127 | 0.188   | ±0.005 | 4.78  | ±0.127 | 0.031   | 0.79 | 230   | 16       | 920   | 63       | 0.875   | 22  | 28          | 0.020   | 0.030   |
| 104-0312031 | 5/16       | 0.312   | ±0.005 | 7.92  | ±0.127 | 0.250   | ±0.005 | 6.35  | ±0.127 | 0.031   | 0.79 | 180   | 12       | 720   | 50       | 1.750   | 44  | 28          | 0.025   | 0.038   |
| 104-0375031 | 3/8        | 0.375   | ±0.005 | 9.52  | ±0.127 | 0.312   | ±0.005 | 7.92  | ±0.127 | 0.031   | 0.79 | 140   | 10       | 560   | 39       | 3.250   | 83  | 28          | 0.031   | 0.047   |
| 104-0438031 | 7/16       | 0.438   | ±0.005 | 11.13 | ±0.127 | 0.375   | ±0.005 | 9.53  | ±0.127 | 0.031   | 0.79 | 120   | 8        | 480   | 33       | 3.250   | 83  | 28          | 0.037   | 0.055   |
| 104-0500031 | 1/2        | 0.500   | ±0.005 | 12.70 | ±0.127 | 0.438   | ±0.005 | 11.13 | ±0.127 | 0.031   | 0.79 | 100   | 7        | 400   | 28       | 4.750   | 121 | 28          | 0.043   | 0.063   |
| 104-0563031 | 9/16       | 0.563   | ±0.006 | 14.30 | ±0.152 | 0.500   | ±0.006 | 12.70 | ±0.152 | 0.031   | 0.79 | 80  | 6        | 320   | 22       | 5.000   | 127 | 28          | 0.048   | 0.072   |

## 104 PFA Heavy Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |        |       |        | Nominal I.D.  |        |       |        | Reference Wall  |      | Working Pressure  |          | Burst Pressure  |          | Min. Bend Radius  |     | Vac. Rating | Weight  |   |
|-------------|------------|---|--------|-------|--------|---|--------|-------|--------|---|------|---|----------|---|----------|---|-----|-------------|---|---|
| #           |            |  |        |       |        |  |        |       |        |  |      |  |          |  |          |  |     |             |  |  |
|             | inch       | inch  | tol.   | mm    | tol.   | inch  | tol.   | mm    | tol.   | inch  | mm   | psi 73°F  | bar 23°C | psi 73°F  | bar 23°C | inch  | mm  | at 73°F     | lb. per ft.   | kg. per m.  |
| 104-0188062 | 3/16       | 0.188   | ±0.005 | 4.78  | ±0.127 | 0.062   | ±0.005 | 1.57  | ±0.127 | 0.062   | 1.57 | 680   | 47       | 2720  | 188      | 0.500   | 13  | 28          | 0.023   | 0.034   |
| 104-0250040 | 1/4        | 0.250   | ±0.005 | 6.35  | ±0.127 | 0.170   | ±0.005 | 4.32  | ±0.127 | 0.040   | 1.02 | 300   | 21       | 1200  | 83       | 0.875   | 22  | 28          | 0.025   | 0.037   |
| 104-0250047 | 1/4        | 0.250   | ±0.005 | 6.35  | ±0.127 | 0.156   | ±0.005 | 3.96  | ±0.127 | 0.047   | 1.19 | 370   | 26       | 1480  | 102      | 1.000   | 25  | 28          | 0.028   | 0.042   |
| 104-0250062 | 1/4        | 0.250   | ±0.005 | 6.35  | ±0.127 | 0.125   | ±0.005 | 3.18  | ±0.127 | 0.062   | 1.57 | 500   | 34       | 2000  | 138      | 0.500   | 13  | 28          | 0.034   | 0.051   |
| 104-0312062 | 5/16       | 0.312   | ±0.005 | 7.92  | ±0.127 | 0.188   | ±0.005 | 4.78  | ±0.127 | 0.062   | 1.57 | 390   | 27       | 1560  | 108      | 0.750   | 19  | 28          | 0.045   | 0.068   |
| 104-0375062 | 3/8        | 0.375   | ±0.005 | 9.52  | ±0.127 | 0.250   | ±0.005 | 6.35  | ±0.127 | 0.062   | 1.57 | 320   | 22       | 1280  | 88       | 1.250   | 32  | 28          | 0.057   | 0.085   |
| 104-0438062 | 7/16       | 0.438   | ±0.005 | 11.13 | ±0.127 | 0.312   | ±0.005 | 7.92  | ±0.127 | 0.062   | 1.57 | 270   | 19       | 1080  | 74       | 2.625   | 67  | 28          | 0.068   | 0.102   |
| 104-0500062 | 1/2        | 0.500   | ±0.005 | 12.70 | ±0.127 | 0.375   | ±0.005 | 9.53  | ±0.127 | 0.062   | 1.57 | 230   | 16       | 920   | 63       | 3.000   | 76  | 28          | 0.079   | 0.119   |
| 104-0750062 | 3/4        | 0.750   | ±0.006 | 19.05 | ±0.152 | 0.625   | ±0.006 | 15.88 | ±0.152 | 0.062   | 1.57 | 140   | 10       | 560   | 39       | 6.000   | 152 | 28          | 0.125   | 0.186   |
| 104-1000062 | 1          | 1.000   | ±0.010 | 25.40 | ±0.254 | 0.875   | ±0.010 | 22.22 | ±0.254 | 0.062   | 1.57 | 100   | 7        | 400   | 28       | 8.000   | 203 | 28          | 0.170   | 0.254   |

## 204 Metric PFA Tubing

| Part Number | Order Size | Nominal O.D.  |       |      |        | Nominal I.D.  |       |      |        | Reference Wall  |       | Working Pressure  |   | Burst Pressure  |          | Min. Bend Radius |   | Vac. Rating   | Weight     |             |
|-------------|------------|---|-------|------|--------|---|-------|------|--------|---|-------|---|---|---|----------|------------------|---|---|------------|-------------|
| #           |            |  |       |      |        |  |       |      |        |  |       |  |  |  |          |                  |  |  |            |             |
|             | mm         | mm  | tol.  | inch | tol.   | mm  | tol.  | inch | tol.   | mm  | inch  | bar 23°C  | psi 73°F  | bar 23°C  | psi 73°F | mm               | inch  | at 73°F   | kg. per m. | lb. per ft. |
| 204-0400100 | 4          | 4   | ±0.11 | .157 | ±0.004 | 2   | ±0.11 | .079 | ±0.250 | 1   | 0.039 | 34  | 500   | 138   | 2000     | 6                | 0.250   | 28  | 0.020      | 0.014       |
| 204-0600100 | 6          | 6   | ±0.11 | .236 | ±0.004 | 4   | ±0.11 | .157 | ±0.004 | 1   | 0.039 | 22  | 320   | 88  | 1280     | 25               | 1.000   | 28  | 0.034      | 0.023       |
| 204-0800100 | 8          | 8   | ±0.11 | .315 | ±0.004 | 6   | ±0.11 | .236 | ±0.004 | 1   | 0.039 | 16  | 230   | 63  | 920      | 51               | 2.000   | 28  | 0.047      | 0.032       |
| 204-1000100 | 10         | 10  | ±0.11 | .393 | ±0.004 | 8   | ±0.11 | .315 | ±0.004 | 1   | 0.039 | 12  | 180   | 50  | 720      | 70               | 2.750   | 28  | 0.061      | 0.041       |
| 204-1200100 | 12         | 12  | ±0.15 | .472 | ±0.006 | 10  | ±0.15 | .393 | ±0.006 | 1   | 0.039 | 10  | 140   | 39  | 560      | 89               | 3.500   | 28  | 0.074      | 0.050       |

For detailed ordering information, please consult price list or contact Parker TexLoc®.

[illegible]

# FEP PRODUCTS

## Smoothbore

Fractional Industrial Wall  
Fractional Heavy Wall  
Metric

## Heat Shrink

1.3:1  
1.67:1  
1.25:1 Roll Cover  
Double Shrink

## Convolute

FEP Convolute  
Convo-Flon  
SAE AS81914/3

## Corrugated

## Retractable Coils

## FEP (Fluorinated Ethylene Propylene)

Working Temperature: 400°F (204°C)

Color: Clear

- Excellent chemical resistance
- Non-wetting
- Weldable
- Tubes can be sealed by melting
- Long continuous lengths
- Low refractive index
- Improved clarity over PFA
- Lower cost alternative to PFA



Intro

PFA  
Tubing  
**A**

FEP  
Tubing  
**B**

PTFE  
Tubing  
**C**

PVDF  
Tubing  
**D**


ETFE  
Tubing  
**E**

Technical  
Pages  
**F**

Index  
**G**

# FEP Tubing

## Series Fractional & Metric: 103, 203

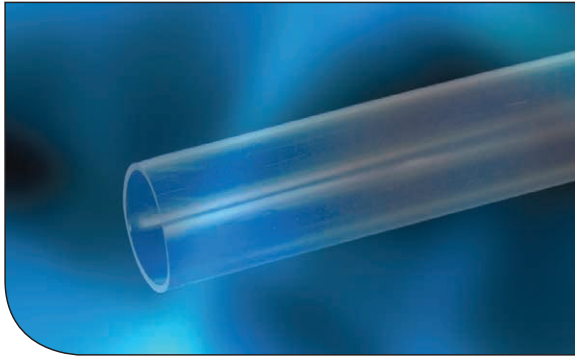

### Features

- Virgin Fluorinated Ethylene Propylene resin
- Translucent
- Chemically inert
- Long continuous lengths
- Low coefficient of friction
- Self extinguishing
- Non-wetting
- Weldable

### Certifications/Compliance

- ASTM D2116-07
- FDA Compliant
- VW-1, UL-83 (natural)
- USP Class VI Compliant

### Applications/Markets



- Nitrogen Transfer
- Ozone Sampling
- Optical Sensor
- Laboratory
- Down Hole Pump
- Food & Beverage
- Catheter Repair
- Syringe Tips

### Order Information

**Example: 103-0250031-NT-100**

**103-0250031-NT-100 – Fractional**

**103-0250031-NT-100 – FEP**

**103-0250031-NT-100 – Tube O.D. in inches (1/4")**

**103-0250031-NT-100 – Tube Wall Thickness in inches (.031")**

**103-0250031-NT-100 – Natural**

**103-0250031-NT-100 – Package Quantity in feet (100')**

### Fittings

Fittings available for sizes 1/8" up to 1"

Parker Fittings available from: Fluid System Connectors Division  
Otsego, MI (269) 692-6555 (269) 692-6634 FAX

FSC Product Families:

- Compression
- Compress-Align®
- Metric Compression
- Flow-Controls
- Prestolok Composite
- Prestolok All-Metal
- Prestolok Stainless
- TrueSeal™

### Notes

- Working Temperature: -100°F (-75°C) to +400°F (204°C)
- Working pressure calculated using a Design Factor of 4 at 73°F (23°C)
- Custom packaging and sizes are quoted upon request
- Package quantities are not continuous

### Options


- Smoothbore
- Convoluted
- Corrugated
- Retractable Coils
- Paratubing

### Colors






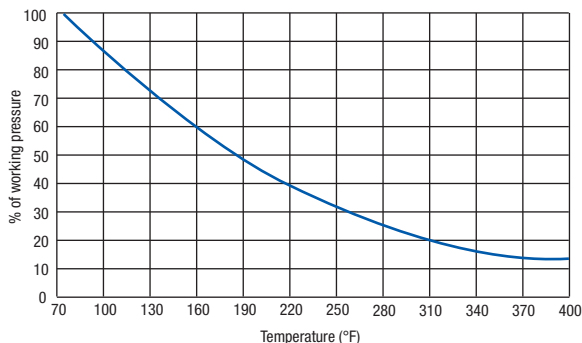


- ○ Natural, Translucent
- Colors available as custom run, see color code table

| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |









### FEP Tubing (Series 103, 203) Maximum Working Pressure (bar)











### 103 FEP Industrial Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |        |       |        |       | Nominal I.D.  |       |        |       |      | Reference Wall  |          | Working Pressure   |          | Burst Pressure  |     | Min. Bend Radius  |             | Vac. Rating | Weight  |   |
|-------------|------------|---|--------|-------|--------|-------|---|-------|--------|-------|------|---|----------|--|----------|---|-----|---|-------------|-------------|---|---|
| #           |            |  |        |       |        |       |  |       |        |       |      |  |          |  |          |  |     |  |             |             |  |  |
|             | inch       | inch  | tol.   | mm    | tol.   | inch  | tol.  | mm    | tol.   | inch  | mm   | psi 73°F  | bar 23°C | psi 73°F   | bar 23°C | inch  | mm  | at 73°F   | lb. per ft. | kg. per m.  |   |   |
| 103-0094031 | 3/32       | 0.094   | ±0.005 | 2.40  | ±0.127 | 0.031 | ±0.002  | 0.79  | ±0.051 | 0.031 | 0.79 | 630   | 43       | 2520   | 174      | 0.500   | 13  | 28  | 0.006       | 0.009       |   |   |
| 103-0125031 | 1/8        | 0.125   | ±0.003 | 3.18  | ±0.076 | 0.062 | ±0.003  | 1.57  | ±0.076 | 0.031 | 0.79 | 470   | 32       | 1880   | 130      | 0.375   | 10  | 28  | 0.009       | 0.013       |   |   |
| 103-0156031 | 5/32       | 0.157   | ±0.005 | 3.99  | ±0.127 | 0.094 | ±0.005  | 2.39  | ±0.127 | 0.031 | 0.79 | 360   | 25       | 1440   | 99       | 0.375   | 10  | 28  | 0.011       | 0.017       |   |   |
| 103-0188031 | 3/16       | 0.188   | ±0.005 | 4.78  | ±0.127 | 0.125 | ±0.005  | 3.18  | ±0.127 | 0.031 | 0.79 | 290   | 20       | 1160   | 80       | 0.750   | 19  | 28  | 0.014       | 0.021       |   |   |
| 103-0250031 | 1/4        | 0.250   | ±0.005 | 6.35  | ±0.127 | 0.188 | ±0.005  | 4.78  | ±0.127 | 0.031 | 0.79 | 210   | 14       | 840  | 58       | 1.750   | 44  | 28  | 0.020       | 0.030       |   |   |
| 103-0312031 | 5/16       | 0.312   | ±0.005 | 7.92  | ±0.127 | 0.250 | ±0.005  | 6.35  | ±0.127 | 0.031 | 0.79 | 160   | 11       | 640  | 44       | 2.250   | 57  | 28  | 0.025       | 0.038       |   |   |
| 103-0375031 | 3/8        | 0.375   | ±0.005 | 9.52  | ±0.127 | 0.312 | ±0.005  | 7.92  | ±0.127 | 0.031 | 0.79 | 130   | 9        | 520  | 36       | 2.750   | 70  | 28  | 0.031       | 0.047       |   |   |
| 103-0438031 | 7/16       | 0.438   | ±0.005 | 11.13 | ±0.127 | 0.375 | ±0.005  | 9.52  | ±0.127 | 0.031 | 0.79 | 110   | 8        | 440  | 30       | 4.000   | 102 | 28  | 0.037       | 0.055       |   |   |
| 103-0500031 | 1/2        | 0.500   | ±0.006 | 12.70 | ±0.152 | 0.438 | ±0.006  | 11.13 | ±0.152 | 0.031 | 0.79 | 90  | 6        | 360  | 25       | 4.000   | 102 | 28  | 0.043       | 0.063       |   |   |
| 103-0563031 | 9/16       | 0.563   | ±0.006 | 14.30 | ±0.152 | 0.500 | ±0.006  | 12.70 | ±0.152 | 0.031 | 0.79 | 80  | 6        | 320  | 22       | 5.000   | 127 | 28  | 0.054       | 0.080       |   |   |

### 103 FEP Heavy Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |        |       |        |       | Nominal I.D.  |       |        |       | Reference Wall  |          | Working Pressure   |          | Burst Pressure  |       | Min. Bend Radius  |         | Vac. Rating | Weight  |   |
|-------------|------------|---|--------|-------|--------|-------|---|-------|--------|-------|---|----------|--|----------|---|-------|---|---------|-------------|---|---|
| #           |            |  |        |       |        |       |  |       |        |       |  |          |  |          |  |       |  |         |             |  |  |
|             | inch       | inch  | tol.   | mm    | tol.   | inch  | tol.  | mm    | tol.   | inch  | mm  | psi 73°F | bar 23°C   | psi 73°F | bar 23°C  | inch  | mm  | at 73°F | lb. per ft. | kg. per m.  |   |
| 103-0188062 | 3/16       | 0.188   | ±0.005 | 4.78  | ±0.127 | 0.064 | ±0.005  | 1.63  | ±0.127 | 0.062 | 1.57  | 630      | 43   | 2520     | 174   | 0.250 | 6   | 28      | 0.023       | 0.034   |   |
| 103-0250040 | 1/4        | 0.250   | ±0.005 | 6.35  | ±0.127 | 0.170 | ±0.005  | 4.32  | ±0.127 | 0.040 | 1.02  | 280      | 19   | 1120     | 77  | 1.250 | 32  | 28      | 0.025       | 0.037   |   |
| 103-0250047 | 1/4        | 0.250   | ±0.005 | 6.35  | ±0.127 | 0.156 | ±0.005  | 3.96  | ±0.127 | 0.047 | 1.19  | 340      | 23   | 1360     | 94  | 0.750 | 19  | 28      | 0.028       | 0.042   |   |
| 103-0250062 | 1/4        | 0.250   | ±0.005 | 6.35  | ±0.127 | 0.125 | ±0.005  | 3.18  | ±0.127 | 0.062 | 1.57  | 470      | 32   | 1880     | 130   | 0.750 | 19  | 28      | 0.034       | 0.051   |   |
| 103-0312062 | 5/16       | 0.312   | ±0.005 | 7.92  | ±0.127 | 0.188 | ±0.005  | 4.78  | ±0.127 | 0.062 | 1.57  | 360      | 25   | 1440     | 99  | 1.375 | 35  | 28      | 0.045       | 0.068   |   |
| 103-0375062 | 3/8        | 0.375   | ±0.005 | 9.52  | ±0.127 | 0.250 | ±0.005  | 6.35  | ±0.127 | 0.062 | 1.57  | 290      | 20   | 1160     | 80  | 1.500 | 38  | 28      | 0.057       | 0.085   |   |
| 103-0438062 | 7/16       | 0.438   | ±0.005 | 11.13 | ±0.127 | 0.312 | ±0.005  | 7.92  | ±0.127 | 0.062 | 1.57  | 250      | 17   | 1000     | 69  | 2.625 | 67  | 28      | 0.068       | 0.102   |   |
| 103-0500062 | 1/2        | 0.500   | ±0.005 | 12.70 | ±0.127 | 0.375 | ±0.005  | 9.53  | ±0.127 | 0.062 | 1.57  | 210      | 14   | 840      | 58  | 2.125 | 54  | 28      | 0.079       | 0.119   |   |
| 103-0625062 | 5/8        | 0.625   | ±0.006 | 15.88 | ±0.152 | 0.500 | ±0.006  | 12.70 | ±0.152 | 0.062 | 1.57  | 160      | 11   | 640      | 44  | 3.000 | 76  | 28      | 0.102       | 0.152   |   |
| 103-0750062 | 3/4        | 0.750   | ±0.006 | 19.05 | ±0.152 | 0.625 | ±0.006  | 15.88 | ±0.152 | 0.062 | 1.57  | 130      | 9  | 520      | 36  | 6.000 | 152   | 28      | 0.125       | 0.186   |   |
| 103-1000062 | 1          | 1.000   | ±0.010 | 25.40 | ±0.254 | 0.875 | ±0.010  | 22.22 | ±0.254 | 0.062 | 1.57  | 90       | 6  | 360      | 25  | 8.000 | 203   | 28      | 0.170       | 0.254   |   |

### 203 Metric FEP Tubing

| Part Number | Order Size | Nominal O.D.  |       |       |        |    | Nominal I.D.  |       |        |    | Reference Wall  |          | Working Pressure   |          | Burst Pressure  |    | Min. Bend Radius  |         | Vac. Rating | Weight  |   |
|-------------|------------|---|-------|-------|--------|----|---|-------|--------|----|---|----------|--|----------|---|----|---|---------|-------------|---|---|
| #           |            |  |       |       |        |    |  |       |        |    |  |          |  |          |  |    |  |         |             |  |  |
|             | mm         | mm  | tol.  | inch  | tol.   | mm | tol.  | inch  | tol.   | mm | inch  | bar 23°C | psi 73°F   | bar 23°C | psi 73°F  | mm | inch  | at 73°F | kg. per m.  | lb. per ft.   |   |
| 203-0300100 | 3          | 3   | ±0.11 | 0.118 | ±0.004 | 1  | ±0.11   | 0.039 | ±0.004 | 1  | 0.039   | 27       | 390  | 108      | 1560  | 6  | 0.250   | 28      | 0.014       | 0.009   |   |
| 203-0400100 | 4          | 4   | ±0.11 | 0.157 | ±0.004 | 2  | ±0.11   | 0.079 | ±0.004 | 1  | 0.039   | 20       | 290  | 80       | 1160  | 13 | 0.500   | 28      | 0.020       | 0.014   |   |
| 203-0500100 | 5          | 5   | ±0.11 | 0.197 | ±0.004 | 3  | ±0.11   | 0.118 | ±0.004 | 1  | 0.039   | 15       | 220  | 61       | 880   | 19 | 0.750   | 28      | 0.027       | 0.018   |   |
| 203-0600100 | 6          | 6   | ±0.13 | 0.236 | ±0.005 | 4  | ±0.13   | 0.157 | ±0.005 | 1  | 0.039   | 12       | 180  | 50       | 720   | 29 | 1.125   | 28      | 0.034       | 0.023   |   |
| 203-0700100 | 7          | 7   | ±0.13 | 0.276 | ±0.005 | 5  | ±0.13   | 0.197 | ±0.005 | 1  | 0.039   | 10       | 150  | 41       | 600   | 44 | 1.750   | 28      | 0.041       | 0.027   |   |
| 203-0800100 | 8          | 8   | ±0.13 | 0.315 | ±0.005 | 6  | ±0.13   | 0.236 | ±0.005 | 1  | 0.039   | 9        | 130  | 36       | 520   | 51 | 2.000   | 28      | 0.047       | 0.032   |   |
| 203-0900100 | 9          | 9   | ±0.13 | 0.354 | ±0.005 | 7  | ±0.13   | 0.275 | ±0.005 | 1  | 0.039   | 8        | 110  | 30       | 440   | 54 | 2.125   | 28      | 0.054       | 0.036   |   |
| 203-1000100 | 10         | 10  | ±0.13 | 0.393 | ±0.005 | 8  | ±0.13   | 0.315 | ±0.005 | 1  | 0.039   | 7        | 100  | 28       | 400   | 70 | 2.750   | 28      | 0.061       | 0.041   |   |
| 203-1200100 | 12         | 12  | ±0.15 | 0.472 | ±0.006 | 10 | ±0.15   | 0.394 | ±0.006 | 1  | 0.039   | 6        | 80   | 22       | 320   | 76 | 3.000   | 28      | 0.074       | 0.050   |   |

For detailed ordering information, please consult price list or contact Parker TexLoc®.

# FEP Heat Shrinkable Tubing

## Series 1.3:1 HS1.3FEP



### Applications/Markets



- Protective Cover
- UV Light Covering
- Product Testing
- Rollers

### Features

- Easier to shrink than PTFE
- Chemically inert
- Low coefficient of friction
- Superior dielectric strength
- Good heat resistance
- Self extinguishing
- Non-wetting

### Certifications

- AMS-DTL-23053/11A, Class 1
- ASTM D2902 Type II
- ASTM D3296-03
- VW-1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant

### Order Information

**Example: HS1.3FEP24-0CC48.000**

**HS1.3FEP24-0CC48.000 – Heat Shrink**

**HS1.3FEP24-0CC48.000 – Shrink Ratio (1.3:1)**

**HS1.3FEP24-0CC48.000 – FEP**

**HS1.3FEP24-0CC48.000 – Heat Shrink Size in AWG (AWG 24) (For inch size use inch (3/8"))**

**HS1.3FEP24-0CC48.000 – Black**

**HS1.3FEP24-0CC48.000 – Package Quantity in feet (48")**

### Notes

- Working Temperature: 400°F (204°C)
- Shrink Temperature:  
1" Dia. and below : 410°F (210°C)  
Over 1" Dia. : 430°F (221°C)
- \*Dielectric Strength:  $\geq 2,000$  V/M, per ASTM D 149 short term test of 10 MIL thickness (Volts/MIL)
- Heat Shrink tubing is available in stock packaging of 4-ft. straight lengths
- Minimum quantities may apply
- Custom packaging, sizes, lengths and colors are quoted upon request

### Colors


- ○ Natural, Translucent
- Colors available as custom run, see color code table

When ordering coiled tubing in colors, the color code is always followed by TC; when ordering cut lengths, the color code is followed by CC  
ie HS1.3FEP24-2TC  
ie HS1.3FEP24-0CC48.000

| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## HS1.3FEP AWG Heat Shrink Tubing (1.3:1)

| Part Number | Order Size<br>AWG | Mil Spec*     | Minimum Expanded I.D. |      | Maximum Recovered I.D. |      | Nominal Recovered Wall |             |
|-------------|-------------------|---------------|-----------------------|------|------------------------|------|------------------------|-------------|
|             |                   |               | inch                  | mm   | inch                   | mm   | inch                   | mm          |
| HS1.3FEP24  | 24                | 23053/11A-101 | 0.031                 | 0.79 | 0.027                  | 0.69 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS1.3FEP22  | 22                | 23053/11A-102 | 0.036                 | 0.91 | 0.032                  | 0.81 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS1.3FEP20  | 20                | 23053/11A-103 | 0.045                 | 1.14 | 0.039                  | 0.99 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS1.3FEP18  | 18                | 23053/11A-104 | 0.060                 | 1.52 | 0.049                  | 1.25 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS1.3FEP16  | 16                | 23053/11A-105 | 0.075                 | 1.90 | 0.061                  | 1.55 | 0.009 ± 0.002          | 0.23 ± 0.05 |
| HS1.3FEP14  | 14                | 23053/11A-106 | 0.092                 | 2.34 | 0.072                  | 1.83 | 0.009 ± 0.002          | 0.23 ± 0.05 |
| HS1.3FEP12  | 12                | 23053/11A-107 | 0.115                 | 2.92 | 0.089                  | 2.26 | 0.009 ± 0.002          | 0.23 ± 0.05 |
| HS1.3FEP10  | 10                | 23053/11A-108 | 0.141                 | 3.58 | 0.114                  | 2.90 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS1.3FEP09  | 9                 | 23053/11A-109 | 0.158                 | 4.01 | 0.124                  | 3.15 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS1.3FEP08  | 8                 | 23053/11A-110 | 0.180                 | 4.57 | 0.143                  | 3.63 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS1.3FEP07  | 7                 | 23053/11A-111 | 0.197                 | 5.00 | 0.158                  | 4.01 | 0.011 ± 0.004          | 0.28 ± 0.10 |
| HS1.3FEP06  | 6                 | 23053/11A-112 | 0.225                 | 5.72 | 0.180                  | 4.57 | 0.011 ± 0.004          | 0.28 ± 0.10 |
| HS1.3FEP05  | 5                 | 23053/11A-113 | 0.248                 | 6.30 | 0.198                  | 5.03 | 0.011 ± 0.004          | 0.28 ± 0.10 |
| HS1.3FEP04  | 4                 | 23053/11A-114 | 0.290                 | 7.37 | 0.226                  | 5.74 | 0.011 ± 0.004          | 0.28 ± 0.10 |
| HS1.3FEP03  | 3                 | 23053/11A-115 | 0.310                 | 7.87 | 0.249                  | 6.32 | 0.011 ± 0.004          | 0.28 ± 0.10 |
| HS1.3FEP02  | 2                 | 23053/11A-116 | 0.365                 | 9.27 | 0.280                  | 7.11 | 0.012 ± 0.004          | 0.31 ± 0.10 |
| HS1.3FEP01  | 1                 | 23053/11A-117 | 0.400                 | 10.2 | 0.311                  | 7.90 | 0.012 ± 0.004          | 0.31 ± 0.10 |
| HS1.3FEP00  | 0                 | 23053/11A-118 | 0.440                 | 11.2 | 0.349                  | 8.86 | 0.012 ± 0.004          | 0.31 ± 0.10 |

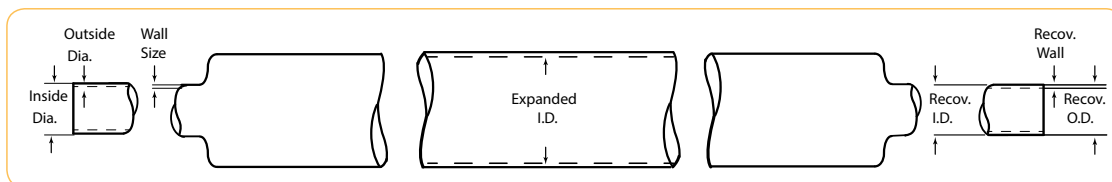

## HS1.3FEP Fractional Heat Shrink Tubing (1.3:1)

| Part Number  | Order Size<br>inch | Mil Spec*     | Minimum Expanded I.D. |      | Maximum Recovered I.D. |      | Nominal Recovered Wall |             |
|--------------|--------------------|---------------|-----------------------|------|------------------------|------|------------------------|-------------|
|              |                    |               | inch                  | mm   | inch                   | mm   | inch                   | mm          |
| HS1.3FEP3/8  | 3/8                | 23053/11A-119 | 0.500                 | 12.7 | 0.383                  | 9.73 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS1.3FEP7/16 | 7/16               | 23053/11A-120 | 0.580                 | 14.7 | 0.448                  | 11.4 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS1.3FEP1/2  | 1/2                | 23053/11A-121 | 0.666                 | 16.9 | 0.510                  | 13.0 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS1.3FEP5/8  | 5/8                | 23053/11A-122 | 0.830                 | 21.1 | 0.637                  | 16.2 | 0.025 ± 0.004          | 0.64 ± 0.10 |
| HS1.3FEP3/4  | 3/4                | 23053/11A-123 | 1.000                 | 25.4 | 0.764                  | 19.4 | 0.030 ± 0.004          | 0.76 ± 0.10 |
| HS1.3FEP7/8  | 7/8                | 23053/11A-124 | 1.170                 | 29.7 | 0.891                  | 22.6 | 0.035 ± 0.004          | 0.89 ± 0.10 |
| HS1.3FEP1.00 | 1                  | 23053/11A-126 | 1.330                 | 33.8 | 1.020                  | 25.9 | 0.035 ± 0.004          | 0.89 ± 0.10 |
| HS1.3FEP1.13 | 1-1/8              | 23053/11A-133 | 1.500                 | 38.1 | 1.145                  | 29.1 | 0.035 ± 0.004          | 0.89 ± 0.10 |
| HS1.3FEP1.25 | 1-1/4              | 23053/11A-134 | 1.666                 | 42.3 | 1.270                  | 32.3 | 0.035 ± 0.004          | 0.89 ± 0.10 |
| HS1.3FEP1.38 | 1-3/8              | 23053/11A-135 | 1.833                 | 46.6 | 1.390                  | 35.3 | 0.035 ± 0.004          | 0.89 ± 0.10 |
| HS1.3FEP1.50 | 1-1/2              | 23053/11A-136 | 2.000                 | 50.8 | 1.520                  | 38.6 | 0.035 ± 0.004          | 0.89 ± 0.10 |

For detailed ordering information, please consult price list or contact Parker TexLoc®.

# FEP Heat Shrinkable Tubing

## Series 1.67:1 HS1.6FEP



### Applications/Markets



- Protective Cover
- UV Light Covering
- Product Testing
- Rollers

### Features

- Easier to shrink than PTFE
- Chemically inert
- Low coefficient of friction
- Superior dielectric strength
- Good heat resistance
- Self extinguishing
- Non-wetting

### Certifications

- AMS-DTL-23053/11A, Class 2
- ASTM 2902 Type II
- ASTM D3296-03
- VW-1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant

### Order Information

**Example: HS1.6FEP3/32-NC48.000**

**HS1.6FEP3/32-NC48.000 – Heat Shrink**

**HS1.6FEP3/32-NC48.000 – Shrink Ratio (1.67:1)**

**HS1.6FEP3/32-NC48.000 – FEP**

**HS1.6FEP3/32-NC48.000 – Heat Shrink Size in inches (3/32")**

**HS1.6FEP3/32-NC48.000 – Natural**

**HS1.6FEP3/32-NC48.000 – Cut Tubing**

**HS1.6FEP3/32-NC48.000 – Package Quantity in feet (48")**

### Notes

- Working Temperature: 400°F (204°C)
- Shrink Temperature:  
1" Dia. and below : 410°F (210°C)  
Over 1" Dia. : 430°F (221°C)
- \*Dielectric Strength:  $\geq 2,000$  V/M, per ASTM D 149 short term test of 10 MIL thickness (Volts/MIL)
- Heat Shrink tubing is available in stock packaging of 4-ft. straight lengths
- Minimum quantities may apply
- Custom packaging, sizes, lengths and colors are quoted upon request

### Colors


- ○ Natural, Translucent
- Colors available as custom run, see color code table

When ordering coiled tubing in colors, the color code is always followed by TC; when ordering cut lengths, the color code is followed by CC  
ie HS1.6FEP3/32-2TC  
ie HS1.6FEP3/32-0CC48.000

| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

**HS1.6FEP Fractional Heat Shrink Tubing (1.67:1)**

| Part Number  | Order Size<br>inch | Mil Spec*     | Minimum Expanded I.D. |      | Maximum Recovered I.D. |      | Nominal Recovered Wall |             |
|--------------|--------------------|---------------|-----------------------|------|------------------------|------|------------------------|-------------|
|              |                    |               | inch                  | mm   | inch                   | mm   | inch                   | mm          |
| HS1.6FEP3/32 | 3/32               | 23053/11A-201 | 0.093                 | 2.36 | 0.056                  | 1.42 | 0.008 ± 0.003          | 0.20 ± 0.08 |
| HS1.6FEP1/8  | 1/8                | 23053/11A-202 | 0.125                 | 3.18 | 0.075                  | 1.90 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS1.6FEP3/16 | 3/16               | 23053/11A-203 | 0.188                 | 4.78 | 0.115                  | 2.92 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS1.6FEP1/4  | 1/4                | 23053/11A-204 | 0.250                 | 6.35 | 0.150                  | 3.81 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS1.6FEP3/8  | 3/8                | 23053/11A-205 | 0.375                 | 9.52 | 0.225                  | 5.72 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS1.6FEP1/2  | 1/2                | 23053/11A-206 | 0.500                 | 12.7 | 0.300                  | 7.62 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS1.6FEP3/4  | 3/4                | 23053/11A-207 | 0.750                 | 19.1 | 0.450                  | 11.4 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS1.6FEP1.00 | 1                  | 23053/11A-208 | 1.000                 | 25.4 | 0.600                  | 15.2 | 0.025 ± 0.005          | 0.64 ± 0.13 |
| HS1.6FEP1.25 | 1-1/2              | 23053/11A-209 | 1.500                 | 38.1 | 0.900                  | 22.9 | 0.030 ± 0.005          | 0.76 ± 0.13 |
| HS1.6FEP1.50 | 2                  | 23053/11A-210 | 2.000                 | 50.8 | 1.200                  | 30.5 | 0.030 ± 0.005          | 0.76 ± 0.13 |

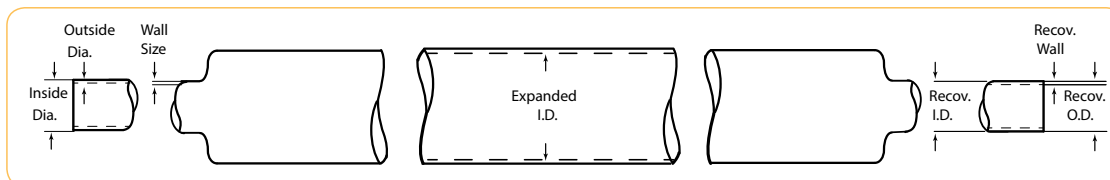

# FEP Heat Shrinkable Roll Cover

Series 1.25:1 HS1.25FEP



## Features

- Extends roller life
- Eliminates roller build up and picking
- Low coefficient of friction
- Flexible
- Good heat resistance

## Certifications

- ASTM D2902 Type II
- VW-1, UL-83 (natural)

## Applications/Markets



- Protective Cover
- Rollers

### Order Information

**Example: HS1.25FEP3.50-NC48.000**

**HS1.25FEP3.50-NC48.000 – Heat Shrink**

**HS1.25FEP3.50-NC48.000 – Shrink Ratio (1.25:1)**

**HS1.25FEP3.50-NC48.000 – FEP**

**HS1.25FEP3.50-NC48.000 – Heat Shrink Expanded**

**Size inches (3 1/2 in)**

**HS1.25FEP3.50-NC48.000 – Natural**

**HS1.25FEP3.50-NC48.000 – Cut Tubing**

**HS1.25FEP3.50-NC48.000 – Package Quantity in feet (48")**

### Notes

- Working Temperature: 347°F (175°C)
- Shrink Temperature:  
347°F (175°C) for 10 minutes - For high temperatures 500°F (260°C), PFA roll covers are available
- Dielectric Strength:  $\geq 2,000$  V/M, per ASTM D 149 short term test of 10 MIL thickness (Volts/MIL)
- Roll Cover is available in stock packaging of 4-ft. straight lengths
- Custom packaging, sizes, lengths and colors are quoted upon request
- For adhesion purposes, roll covers must be etched; Etching is available on the inside diameter, outside diameter or both
- Minimum quantities may apply

### Colors

- ○ Natural, Translucent

### HS1.25.1 FEP Roll Cover

| Part Number   | Order Size | Minimum Expanded I.D. |       | Maximum Recovered I.D. |       | Nominal Recovered Wall |                  |
|---------------|------------|-----------------------|-------|------------------------|-------|------------------------|------------------|
|               |            | inch                  | mm    | inch                   | mm    | inch                   | mm               |
| HS1.25FEP1/2  | 1/2        | 0.550                 | 14.0  | 0.440                  | 11.2  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP5/8  | 5/8        | 0.700                 | 17.8  | 0.540                  | 13.7  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP3/4  | 3/4        | 0.800                 | 20.3  | 0.640                  | 16.3  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP7/8  | 7/8        | 0.950                 | 24.1  | 0.760                  | 19.3  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP1.00 | 1          | 1.100                 | 27.9  | 0.880                  | 22.4  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP1.25 | 1 1/4      | 1.300                 | 33.0  | 1.000                  | 25.4  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP1.50 | 1-1/2      | 1.700                 | 43.2  | 1.300                  | 33.0  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP2.00 | 2          | 2.100                 | 53.3  | 1.700                  | 43.2  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP2.25 | 2-1/4      | 2.260                 | 59.7  | 2.000                  | 50.8  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP2.50 | 2-1/2      | 2.600                 | 66.0  | 2.100                  | 53.3  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP3.00 | 3          | 3.100                 | 78.7  | 2.600                  | 66.0  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP3.50 | 3-1/2      | 3.500                 | 88.9  | 3.100                  | 78.7  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP4.00 | 4          | 4.300                 | 109.2 | 3.500                  | 88.9  | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP5.00 | 5          | 5.200                 | 132.1 | 4.300                  | 109.3 | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP6.00 | 6          | 6.200                 | 157.5 | 5.200                  | 132.1 | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP7.00 | 7          | 7.200                 | 182.9 | 6.200                  | 157.5 | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |
| HS1.25FEP8.00 | 8          | 8.300                 | 210.8 | 7.200                  | 182.9 | 0.020 $\pm$ 0.004      | 0.508 $\pm$ 0.10 |

# FEP/PTFE Heat Shrinkable Double Shrink

## Series TSSS and TSSL



### Features

- Double Shrink encapsulates your parts as the FEP melts during the PTFE shrinking process
- Protects cables, tubes and other objects from moisture and dirt
- Self extinguishing

### Certifications

- VW-1, UL-83 (natural)

### Applications/Markets



- Wire splices
- Encapsulates fittings

### FEP/PTFE Double Shrink Tubing

| Part Number          | Minimum Expanded I.D. |      | Maximum Recovered I.D. |      | Nominal Recovered Wall |       |
|----------------------|-----------------------|------|------------------------|------|------------------------|-------|
|                      | inch                  | mm   | inch                   | mm   | inch                   | mm    |
| <b>Standard Wall</b> |                       |      |                        |      |                        |       |
| TSSS036              | 0.036                 | 0.91 | 0.00                   | 0.00 | 0.023                  | 0.584 |
| TSSS060              | 0.060                 | 1.52 | 0.00                   | 0.00 | 0.028                  | 0.711 |
| TSSS130              | 0.130                 | 3.30 | 0.00                   | 0.00 | 0.032                  | 0.813 |
| TSSS160              | 0.160                 | 4.06 | 0.00                   | 0.00 | 0.032                  | 0.813 |
| TSSS190              | 0.190                 | 4.83 | 0.061                  | 1.55 | 0.035                  | 0.889 |
| TSSS250              | 0.250                 | 6.35 | 0.125                  | 3.18 | 0.035                  | 0.889 |
| TSSS350              | 0.350                 | 8.89 | 0.190                  | 4.83 | 0.035                  | 0.889 |
| TSSS450              | 0.450                 | 11.4 | 0.312                  | 7.92 | 0.055                  | 1.400 |
| TSSS700              | 0.700                 | 17.8 | 0.440                  | 11.2 | 0.055                  | 1.400 |
| TSSS950              | 0.950                 | 24.1 | 0.680                  | 17.3 | 0.065                  | 1.650 |

|                   |       |      |       |      |       |       |
|-------------------|-------|------|-------|------|-------|-------|
| <b>Light Wall</b> |       |      |       |      |       |       |
| TSSL065           | 0.065 | 1.65 | 0.00  | 0.00 | 0.015 | 0.381 |
| TSSL115           | 0.115 | 2.92 | 0.045 | 1.14 | 0.015 | 0.381 |
| TSSL130           | 0.130 | 3.30 | 0.060 | 1.52 | 0.015 | 0.381 |
| TSSL180           | 0.180 | 4.57 | 0.065 | 1.65 | 0.015 | 0.381 |
| TSSL190           | 0.190 | 4.83 | 0.070 | 1.78 | 0.015 | 0.381 |
| TSSL240           | 0.240 | 6.10 | 0.150 | 3.81 | 0.020 | 0.508 |
| TSSL350           | 0.350 | 8.89 | 0.210 | 5.33 | 0.025 | 0.635 |
| TSSL480           | 0.480 | 12.2 | 0.315 | 8.00 | 0.032 | 0.813 |
| TSSL700           | 0.700 | 17.8 | 0.500 | 12.7 | 0.040 | 1.020 |
| TSSL1000          | 1     | 25.4 | 0.700 | 17.8 | 0.045 | 1.140 |

### Order Information

**Example: TSSL036-NC48.000**

**TSSL036-NC48.000 – Double Shrink**

**TSSL036-NC48.000 – Light Wall**

**TSSL036-NC48.000 – Size in inches (0.036")**

**TSSL036-NC48.000 – Natural**

**TSSL036-NC48.000 – Cut Tubing**

**TSSL036-NC48.000 – Package Quantity in feet (48")**

### Notes

- Working Temperature: 450°F (231°C)
- Shrink Temperature: 680°F (360°C)
- Longitudinal Change: +/- 10%
- Heat Shrink tubing is available in stock packaging of 4-ft. straight lengths
- Custom packaging, sizes, lengths and colors are quoted upon request
- Minimum quantities may apply

### Colors

- ○ Natural, Translucent

# FEP Convoluted Tubing

Series: CV03 and Convo-Flon™



## Features

- Cuffs are sized on the I.D.
- Very flexible
- Long continuous lengths
- Translucent
- Chemically inert
- Good flexlife

## Certifications/Compliance

- ASTM D3296-03
- VW-1, UL-83 (natural)

## Applications/Markets



- Fluid Transport
- Vascular Graft
- Laboratory
- Robotics

## Order Information

**Example: CV03-1-1/2-NT**

**CV03-1-1/2-NT – Convoluted Tubing**

**CV03-1-1/2-NT – FEP**

**CV03-1-1/2-NT – Tube Size in inches (1-1/2")**

**CV03-1-1/2-NT – Natural**

## Notes

- Working Temperature: -100°F to 400°F (-75°C to 204°C)

## Colors

- ○ Natural, Translucent


## FEP Convoluted

(Standard tubing is natural)


| Part Number  | Order Size | Standard Cuff I.D. "A" |      | Standard Cuff Length "B" |      | Wall Thickness "C" |       | Min. Inside Diameter "D" |      | Max. Inside Diameter |      | Max. Outside Diameter "E" |      | **Min. Bend Radius |     |
|--------------|------------|------------------------|------|--------------------------|------|--------------------|-------|--------------------------|------|----------------------|------|---------------------------|------|--------------------|-----|
|              |            | inch                   | mm   | inch                     | mm   | inch               | mm    | inch                     | mm   | inch                 | mm   | inch                      | mm   | inch               | mm  |
| CV03-1/4-NT  | 1/4        | 1/4                    | 6.35 | 3/4                      | 19.1 | 0.020              | 0.508 | 0.251                    | 6.38 | 0.265                | 6.73 | 0.405                     | 10.3 | 0.365              | 9   |
| CV03-5/16-NT | 5/16       | 5/16                   | 7.94 | 1                        | 25.4 | 0.023              | 0.584 | 0.273                    | 6.93 | 0.281                | 7.14 | 0.424                     | 10.8 | 0.500              | 13  |
| CV03-3/8-NT  | 3/8        | 3/8                    | 9.53 | 1                        | 25.4 | 0.023              | 0.584 | 0.364                    | 9.25 | 0.375                | 9.53 | 0.530                     | 13.5 | 0.875              | 22  |
| CV03-1/2-NT  | 1/2        | 1/2                    | 12.7 | 1                        | 25.4 | 0.025              | 0.635 | 0.485                    | 12.3 | 0.500                | 12.7 | 0.660                     | 16.8 | 0.625              | 16  |
| CV03-5/8-NT  | 5/8        | 5/8                    | 15.9 | 1-1/4                    | 31.8 | 0.025              | 0.635 | 0.609                    | 15.5 | 0.625                | 15.9 | 0.780                     | 19.8 | 1.500              | 38  |
| CV03-3/4-NT  | 3/4        | 3/4                    | 19.1 | 1-1/2                    | 38.1 | 0.025              | 0.635 | 0.730                    | 18.5 | 0.750                | 19.1 | 0.975                     | 24.8 | 3.500              | 89  |
| CV03-1.00-NT | 1          | 1                      | 25.4 | 2                        | 50.8 | 0.030              | 0.762 | 0.975                    | 24.8 | 1.000                | 25.4 | 1.260                     | 32.0 | 2.250              | 57  |
| CV03-1.25-NT | 1-1/4      | 1-1/4                  | 31.8 | 2-1/2                    | 63.5 | 0.040              | 1.02  | 1.210                    | 30.7 | 1.250                | 31.8 | 1.540                     | 39.1 | 2.500              | 64  |
| CV03-1.50-NT | 1-1/2      | 1-1/2                  | 38.1 | 2-1/2                    | 63.5 | 0.045              | 1.14  | 1.490                    | 37.8 | 1.530                | 38.9 | 1.940                     | 49.2 | 3.000              | 76  |
| CV03-2.00-NT | 2          | 2                      | 50.8 | 2-1/2                    | 63.5 | 0.045              | 1.14  | 1.990                    | 50.5 | 2.020                | 51.3 | 2.370                     | 60.2 | 4.250              | 108 |
| CV03-2.50-NT | 2-1/2      | 2-1/2                  | 63.5 | 3                        | 73.2 | 0.065              | 1.65  | 2.440                    | 61.9 | 2.500                | 63.5 | 3.000                     | 76.2 | 6.500              | 165 |
| CV03-3.00-NT | 3          | 3                      | 76.2 | 3                        | 73.2 | 0.065              | 1.65  | 2.92                     | 74.2 | 3.02                 | 76.7 | 3.74                      | 95.0 | 7.50               | 191 |

\*\* Minimum 36" length.

Standard Cuffs for **FEP Convo** are sized on the **I.D.**

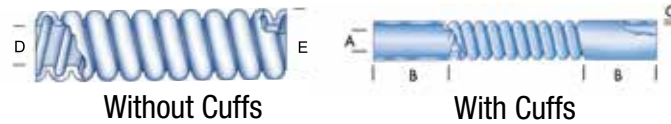

Standard Cuffs for **FEP Convo-Flon** are sized on the **O.D.**

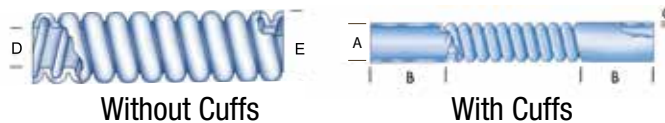

## FEP Convo-Flon™ Convoluted

(Standard tubing is natural)


| Part Number              | Order Size     | Standard Cuff O.D. "A"                          |      | Standard Cuff Length "B" |      | Wall Thickness "C" |       | Min. Inside Diameter "D" |      | Max. Inside Diameter |      | Max. Outside Diameter "E" |      | **Min. Bend Radius |    |
|--------------------------|----------------|---|------|--------------------------|------|--------------------|-------|--------------------------|------|----------------------|------|---------------------------|------|--------------------|----|
|                          |                | inch  | mm   | inch                     | mm   | inch               | mm    | inch                     | mm   | inch                 | mm   | inch                      | mm   | inch               | mm |
| Contact Customer Service | 1/4 x 3/8      | 1/4   | 6.35 | 3/4                      | 19.1 | 0.020              | 0.508 | 0.251                    | 6.38 | 0.265                | 6.73 | 0.375                     | 9.53 | 0.625              | 16 |
|                          | 3/8 x 1/2      | 5/16  | 7.94 | 1                        | 25.4 | 0.023              | 0.584 | 0.364                    | 9.25 | 0.375                | 9.53 | 0.500                     | 12.7 | 0.875              | 22 |
|                          | 1/2 x 5/8      | 3/8   | 9.53 | 1                        | 25.4 | 0.025              | 0.635 | 0.480                    | 12.2 | 0.500                | 12.7 | 0.625                     | 15.9 | 1.250              | 32 |
|                          | 5/8 x 3/4      | 1   | 25.4 | 2                        | 50.8 | 0.025              | 0.635 | 0.609                    | 15.5 | 0.625                | 15.9 | 0.750                     | 19.1 | 1.500              | 38 |
|                          | 3/4 x 7/8      | 1-1/4   | 31.8 | 2-1/2                    | 63.5 | 0.025              | 0.635 | 0.730                    | 18.5 | 0.750                | 19.1 | 0.875                     | 22.2 | 1.750              | 44 |
|                          | .800 x 1       | 1-1/2   | 38.1 | 2-1/2                    | 63.5 | 0.030              | 0.762 | 0.800                    | 20.3 | 0.820                | 2.80 | 1.000                     | 25.4 | 2.250              | 57 |
|                          | 1-1/4<br>1-1/2 | Contact Customer Service for actual dimensions. |      |                          |      |                    |       |                          |      |                      |      |                           |      |                    |    |

\*\* Minimum 36" length.

For detailed ordering information, please consult price list or contact Parker TexLoc®.

# FEP Convoluted

Series SAE AS81914/3 and SAE AS81914/4

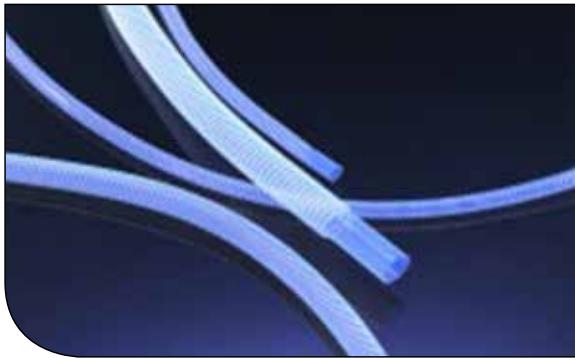

## Features

- Longer lengths than PTFE
- Excellent clarity
- Chemically inert
- Low coefficient of friction
- Superior dielectric strength
- Good heat resistance
- Self extinguishing
- Non-wetting

## Certifications

- SAE AS81914/3
- SAE AS81914/4
- ASTM D3296-03
- FDA Compliant
- USP Class VI Compliant
- VW-1, UL-83 (natural)

## Applications/Markets



- Fluid Handling
- Harnesses
- Lab Equipment
- Robotics

## Order Information

**Example: 81914/3-1001-NT**

**81914/3-1001-NT – SAE AS81914 Convoluted**

81914/3-1001-NT – **FEP**

81914/3-**1001**-NT – **Helical Convolutions**

81914/3-100**1**-NT – **Size (01=0.187")**

81914/3-1001-**NT** – **Color (N=Natural)**

81914/3-1001-**NT** – **"T" is bulk** (for cut tubing remove "T", add length, ie. 81914/3-1001-N1200 = 187" Convo, natural, cut 12" long)

## Notes

- Working Temperature: 392°F (200°C)
- Tubing is provided in natural without cuffs direct from inventory
- Stock packaging is random coils
- Also available in close convolution 81914/4
- Minimum quantities may apply
- Custom packaging, sizes, lengths, cuffs and colors are quoted upon request

## Colors

- ○ Natural, Translucent
- Colors available as custom run, see color code table

When ordering convoluted tubing in colors, the "N" designation for natural should be replaced by the correct color designator;

ie 81914/3-1001-0T (black bulk tubing)

ie 81914/3-1001-01200 (black tubing - 12 inches long)


| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## FEP Convoluted Tubing (SAE AS81914/3)

(Standard tubing is natural)

| Part Number     | MIL Spec | Maximum Inside Diameter |      | Minimum Inside Diameter |      | Maximum Outside Diameter |      | Maximum Wall Thickness |       | Minimum Bend Radius |     | Pitch | Weight      |              |
|-----------------|----------|-------------------------|------|-------------------------|------|--------------------------|------|------------------------|-------|---------------------|-----|-------|-------------|--------------|
|                 |          | inch                    | mm   | inch                    | mm   | inch                     | mm   | inch                   | mm    | inch                | mm  | ±1    | lb./100 ft. | kg./100 mtr. |
| 81914/3-1001-NT | -01      | 0.188                   | 4.78 | 0.181                   | 4.60 | 0.320                    | 8.13 | 0.018                  | 0.457 | .500                | 13  | 8     | 1.5         | 2.23         |
| 81914/3-1002-NT | -02      | 0.281                   | 7.14 | 0.273                   | 6.93 | 0.414                    | 10.5 | 0.018                  | 0.457 | .750                | 19  | 8     | 1.7         | 2.53         |
| 81914/3-1003-NT | -03      | 0.312                   | 7.93 | 0.306                   | 7.77 | 0.450                    | 11.4 | 0.018                  | 0.457 | .750                | 19  | 8     | 1.9         | 2.83         |
| 81914/3-1004-NT | -04      | 0.375                   | 9.53 | 0.364                   | 9.25 | 0.510                    | 13.0 | 0.018                  | 0.457 | .875                | 22  | 8     | 2.2         | 3.27         |
| 81914/3-1005-NT | -05      | 0.437                   | 11.1 | 0.427                   | 10.9 | 0.571                    | 14.5 | 0.018                  | 0.457 | .875                | 22  | 8     | 3.1         | 4.61         |
| 81914/3-1006-NT | -06      | 0.500                   | 12.7 | 0.485                   | 12.3 | 0.650                    | 16.5 | 0.023                  | 0.584 | 1.250               | 32  | 7     | 4.0         | 5.95         |
| 81914/3-1007-NT | -07      | 0.625                   | 15.9 | 0.608                   | 15.4 | 0.770                    | 19.6 | 0.023                  | 0.584 | 1.500               | 38  | 7     | 4.8         | 7.14         |
| 81914/3-1008-NT | -08      | 0.750                   | 19.1 | 0.730                   | 18.5 | 0.930                    | 23.6 | 0.023                  | 0.584 | 1.750               | 44  | 6     | 6.1         | 9.07         |
| 81914/3-1009-NT | -09      | 0.875                   | 22.2 | 0.860                   | 21.8 | 1.073                    | 27.3 | 0.023                  | 0.584 | 2.000               | 51  | 5     | 7.0         | 10.4         |
| 81914/3-1010-NT | -10      | 1.000                   | 25.4 | 0.975                   | 24.8 | 1.226                    | 31.1 | 0.023                  | 0.584 | 2.375               | 60  | 5     | 8.5         | 12.7         |
| 81914/3-1011-NT | -11      | 1.125                   | 28.6 | 1.105                   | 28.1 | 1.390                    | 35.3 | 0.023                  | 0.584 | 2.375               | 60  | 5     | 9.3         | 13.8         |
| 81914/3-1012-NT | -12      | 1.250                   | 31.8 | 1.210                   | 30.7 | 1.539                    | 39.1 | 0.023                  | 0.584 | 2.750               | 70  | 4     | 10.9        | 16.2         |
| 81914/3-1013-NT | -13      | 1.500                   | 38.1 | 1.437                   | 36.5 | 1.832                    | 46.5 | 0.023                  | 0.584 | 3.375               | 86  | 4     | 12.6        | 18.8         |
| 81914/3-1014-NT | -14      | 1.750                   | 44.5 | 1.688                   | 42.9 | 2.082                    | 52.9 | 0.023                  | 0.584 | 3.875               | 98  | 4     | 14.8        | 22.0         |
| 81914/3-1015-NT | -15      | 2.000                   | 50.8 | 1.937                   | 49.2 | 2.332                    | 59.2 | 0.023                  | 0.584 | 4.250               | 108 | 4     | 16.8        | 25.0         |

FEP convoluted tubing is provided in NATURAL without cuffs direct from the factory. Natural part numbers are designated with "NT" after the Mil Spec number (ie 81914/3-1014-NT).

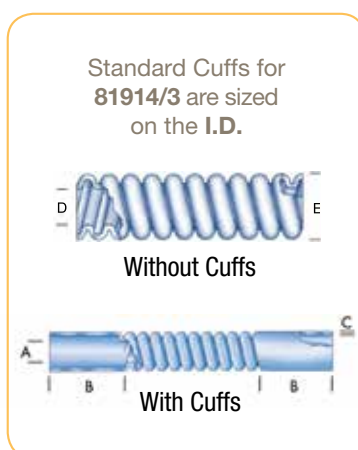

# FEP/PFA Corrugated

## Extra Flexible Fluoropolymer Tubing, Series CR03



### Features

- Capable of turning sharp corners without reducing the inside diameter of the tube
- Extremely flexible
- Kink resistant
- Non stick surface allows for easy cleaning
- Excellent clarity
- Chemically inert
- Available in FEP, PFA and High Purity PFA

### Certifications

- FEP - ASTM D3296-03
- PFA - ASTM D3307-10
- FDA Compliant
- USP Class VI Compliant
- VW-1, UL-83 (natural)

### Applications/Markets



- Vacuum Applications
- Robotics
- Instrumentation
- DNA Sequencer
- Fluid Transfer
- Pharmaceutical
- Wet Bench

### Order Information

**Example: CR03-3/4-NT**

**CR03-3/4-NT – Corrugated Tubing**

**CR03-3/4-NT – FEP**

**CR03-3/4-NT – Tube I.D. when cuffed in inches (3/4")**

**CR03-3/4-NT – Color (N=Natural)**

**CR03-3/4-NT – "T" is bulk - for cuffed tubing add length, ie. CR03-3/4-N1200 = 1" Corr, natural, cut 12" long**

### Colors


- ○ Natural, Translucent

### Notes

- Working Temperature: 200°F (93°C) @ 0 pressure - For higher temperatures, request PFA Corrugated 300°F (148°C) @ 0 pressure
- Vacuum Service: 29.9 IN. Hg (759M Hg)
- Extension-Compression Length Ratio: Approximately 2:1
- Tubing is provided in natural without cuffs direct from inventory or with cuffs, as requested at time of order
- Stock packaging is random coils
- Minimum quantities may apply
- Corrugated tubing is also available in specialty configurations where corrugated and straight tubing run intermittently along the tube
- Custom packaging, sizes, lengths and colors are quoted upon request

## FEP Tex-Flex® Corrugated


| Part Number  | Size To Order | Maximum Cuff I.D. "A" |      | Standard Cuff Length "B" |      | Wall Thickness "C" |      | Ref. Outside Diameter "D" |      | Corrugated Length "E"            | Minimum Bend Radius |      |
|--------------|---------------|-----------------------|------|--------------------------|------|--------------------|------|---------------------------|------|----------------------------------|---------------------|------|
|              |               | inch                  | mm   | inch                     | mm   | inch               | mm   | inch                      | mm   | ±1                               | inch                | mm   |
| CR03-1/4-NT  | 1/4           | 0.250                 | 6.35 | 3/4                      | 19.1 | 0.015              | 0.38 | 0.375                     | 9.53 | To be specified at time of order | 0.125               | 3.18 |
| CR03-3/8-NT  | 3/8           | 0.375                 | 9.53 | 1                        | 25.4 | 0.020              | 0.51 | 0.625                     | 15.9 |                                  | 0.187               | 4.76 |
| CR03-1/2-NT  | 1/2           | 0.500                 | 12.7 | 1                        | 25.4 | 0.025              | 0.64 | 0.750                     | 19.0 |                                  | 0.250               | 6.35 |
| CR03-5/8-NT  | 5/8           | 0.625                 | 15.9 | 1                        | 25.4 | 0.025              | 0.64 | 0.938                     | 23.8 |                                  | 0.312               | 7.94 |
| CR03-3/4-NT  | 3/4           | 0.750                 | 19.1 | 1-1/2                    | 38.1 | 0.030              | 0.76 | 1.063                     | 26.9 |                                  | 0.375               | 9.53 |
| CR03-7/8-NT  | 7/8           | 0.875                 | 22.2 | 1-1/2                    | 38.1 | 0.030              | 0.76 | 1.250                     | 31.8 |                                  | 0.438               | 11.1 |
| CR03-1.00-NT | 1             | 1.000                 | 24.8 | 2                        | 50.8 | 0.035              | 0.89 | 1.438                     | 36.5 |                                  | 0.500               | 12.7 |
| CR03-1.25-NT | 1-1/4         | 1.250                 | 31.8 | 2                        | 50.8 | 0.035              | 0.89 | 1.625                     | 41.3 |                                  | 0.625               | 15.9 |
| CR03-1.50-NT | 1-1/2         | 1.500                 | 38.1 | 2                        | 50.8 | 0.035              | 0.89 | 1.813                     | 46.1 |                                  | 0.750               | 19.1 |
| CR03-2.00-NT | 2             | 2.000                 | 50.8 | 2                        | 50.8 | 0.040              | 1.02 | 2.625                     | 66.7 |                                  | 1.000               | 25.4 |
| CR03-2.50-NT | 2-1/2         | 2.5000                | 63.8 | 2-1/2                    | 63.5 | 0.070              | 1.78 | 3.360                     | 85.3 |                                  | 2.500               | 63.5 |

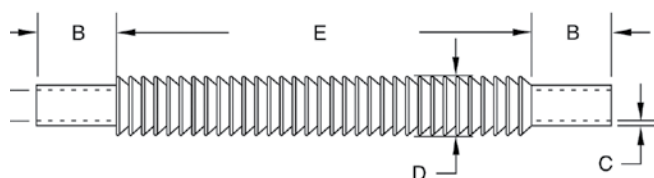

For detailed ordering information, please consult price list or contact Parker TexLoc®.

# Retractable Coiled Tubing

Single or Dual Containment, Series 703, 704, 705

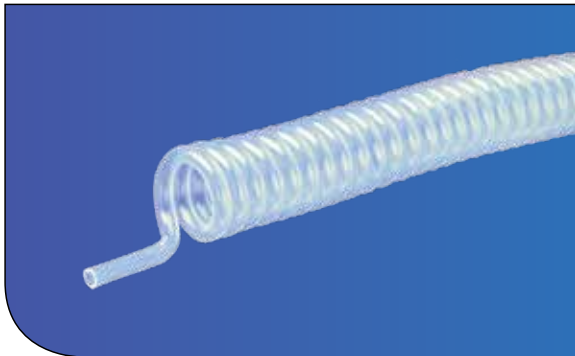

## Features

- Extremely flexible
- Excellent clarity
- Chemically inert
- Low coefficient of friction
- Self extinguishing
- Non-wetting
- Available in FEP, PFA and High Purity PFA

## Certifications

- FEP - ASTM D3296-03
- PFA - ASTM D3307-10
- FDA Compliant
- USP Class VI Compliant
- VW-1, UL-83 (natural)

## Applications/Markets



- Fluid Handling
- Wet Bench
- Lab Equipment
- Gas Dispensing
- Medical

## Order Information

**Example: 704-0312062-xx0012**

704-0312062-xx0012 – **Retractable tubing**

704-0312062-xx0012 – **PFA**

704-0312062-xx0012 – **Tube O.D. in inches (3/16")**

704-0312062-xx0012 – **Wall (0.062")**

704-0312062-xx0012 – **Custom Options** (when needed)

704-0312062-xx0012 – **Length 12"**

## Fittings

Fittings available for sizes 3/16" up to 1/2"

Parker Fittings available from:  
Fluid System Connectors Division  
Otsego, MI

(269) 694-2550

(269) 692-6634 FAX

FSC Product Families:

- Compression
- Compress-Align®
- Fast & Tite
- TrueSeal™

## Colors

- ○ Natural, Translucent

## Notes


- Working Temperature: 200°F (93°C) @ 0 pressure - For higher temperatures, request PFA 300°F (148°C) @ 0 pressure; above these temperatures, the coils dimensions are not stable and the coils will lose their shape
- "X" denotes resin type - Replace "X" with 3 for FEP, 4 for PFA and 5 for HP PFA
- "xx" denotes custom options - Use when needed
- Standard left/right tail length is 6 inches
- Minimum quantities may apply
- Custom packaging, sizes, lengths and colors are quoted upon request



Parker Hannifin Corporation | Parflex® Division, TexLoc® | Fort Worth, Tx | [www.texloc.com](http://www.texloc.com)

## Retractable Tubing

| Part Number        | Size To Order<br>O.D. x I.D. | Coil Inside Diameter |      | Retracted Length "A" |     | Extended Length |      |
|--------------------|------------------------------|----------------------|------|----------------------|-----|-----------------|------|
|                    |                              | inch                 | mm   | inch                 | mm  | inch            | mm   |
| 70X-0188062-xx0003 | 3/16" x 1/16"                | 0.750                | 19.1 | 3                    | 76  | 12              | 305  |
| 70X-0188062-xx0006 | 3/16" x 1/16"                | 0.750                | 19.1 | 6                    | 152 | 24              | 610  |
| 70X-0188062-xx0012 | 3/16" x 1/16"                | 0.750                | 19.1 | 12                   | 305 | 48              | 1219 |
| 70X-0188062-xx0018 | 3/16" x 1/16"                | 0.750                | 19.1 | 18                   | 457 | 72              | 1829 |
| 70X-0250062-xx0003 | 1/4" x 1/8"                  | 1                    | 25.4 | 3                    | 76  | 12              | 305  |
| 70X-0250062-xx0006 | 1/4" x 1/8"                  | 1                    | 25.4 | 6                    | 152 | 24              | 610  |
| 70X-0250062-xx0012 | 1/4" x 1/8"                  | 1                    | 25.4 | 12                   | 305 | 48              | 1219 |
| 70X-0250062-xx0018 | 1/4" x 1/8"                  | 1                    | 25.4 | 18                   | 457 | 72              | 1829 |
| 70X-0312062-xx0003 | 5/16" x 3/16"                | 1.625                | 41.3 | 3                    | 76  | 12              | 305  |
| 70X-0312062-xx0006 | 5/16" x 3/16"                | 1.625                | 41.3 | 6                    | 152 | 24              | 610  |
| 70X-0312062-xx0012 | 5/16" x 3/16"                | 1.625                | 41.3 | 12                   | 305 | 48              | 1219 |
| 70X-0312062-xx0018 | 5/16" x 3/16"                | 1.625                | 41.3 | 18                   | 457 | 72              | 1829 |
| 70X-0375062-xx0003 | 3/8" x 1/4"                  | 1.625                | 41.3 | 3                    | 76  | 12              | 305  |
| 70X-0375062-xx0006 | 3/8" x 1/4"                  | 1.625                | 41.3 | 6                    | 152 | 24              | 610  |
| 70X-0375062-xx0012 | 3/8" x 1/4"                  | 1.625                | 41.3 | 12                   | 305 | 48              | 1219 |
| 70X-0375062-xx0018 | 3/8" x 1/4"                  | 1.625                | 41.3 | 18                   | 457 | 72              | 1829 |
| 70X-0438062-xx0003 | 7/16" x 5/16"                | 3                    | 76.2 | 3                    | 76  | 12              | 305  |
| 70X-0438062-xx0006 | 7/16" x 5/16"                | 3                    | 76.2 | 6                    | 152 | 24              | 610  |
| 70X-0438062-xx0012 | 7/16" x 5/16"                | 3                    | 76.2 | 12                   | 305 | 48              | 1219 |
| 70X-0500062-xx0003 | 1/2" x 3/8"                  | 3                    | 76.2 | 3                    | 76  | 12              | 305  |
| 70X-0500062-xx0006 | 1/2" x 3/8"                  | 3                    | 76.2 | 6                    | 152 | 24              | 610  |
| 70X-0500062-xx0012 | 1/2" x 3/8"                  | 3                    | 76.2 | 12                   | 305 | 48              | 1219 |

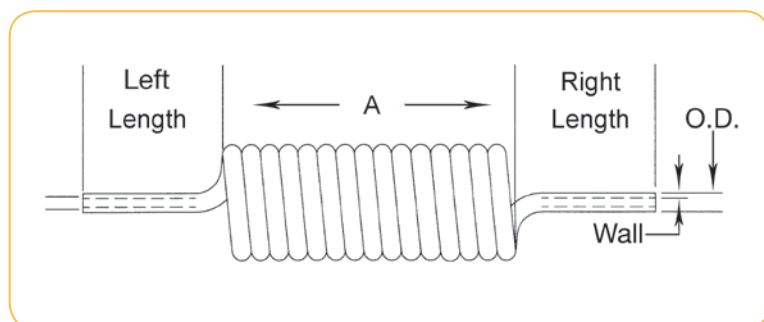

For detailed ordering information, please consult price list or contact Parker TexLoc®.

[illegible]

# PTFE PRODUCTS

## Smoothbore

Fractional Industrial Wall  
Fractional Heavy Wall  
Metric  
Fractional Electrical Insulation  
AWG Electrical Insulation

## Spiral Wrap

## Beading

## Convolute

Convo-Tex®  
Low Profile  
Heavy Wall  
SAE AS81914/1

## Heat Shrink


2:1 AWG  
2:1 Fractional  
4:1 Fractional

## PTFE (Polytetrafluoroethylene)

Working Temperature: 500°F (260°C)

Color: Opaque to translucent

- Chemically inert
- Lowest coefficient of friction
- Superior dielectric strength
- Exceptional heat resistance
- Self extinguishing
- Non-wetting
- Excellent flexlife
- Laser markable

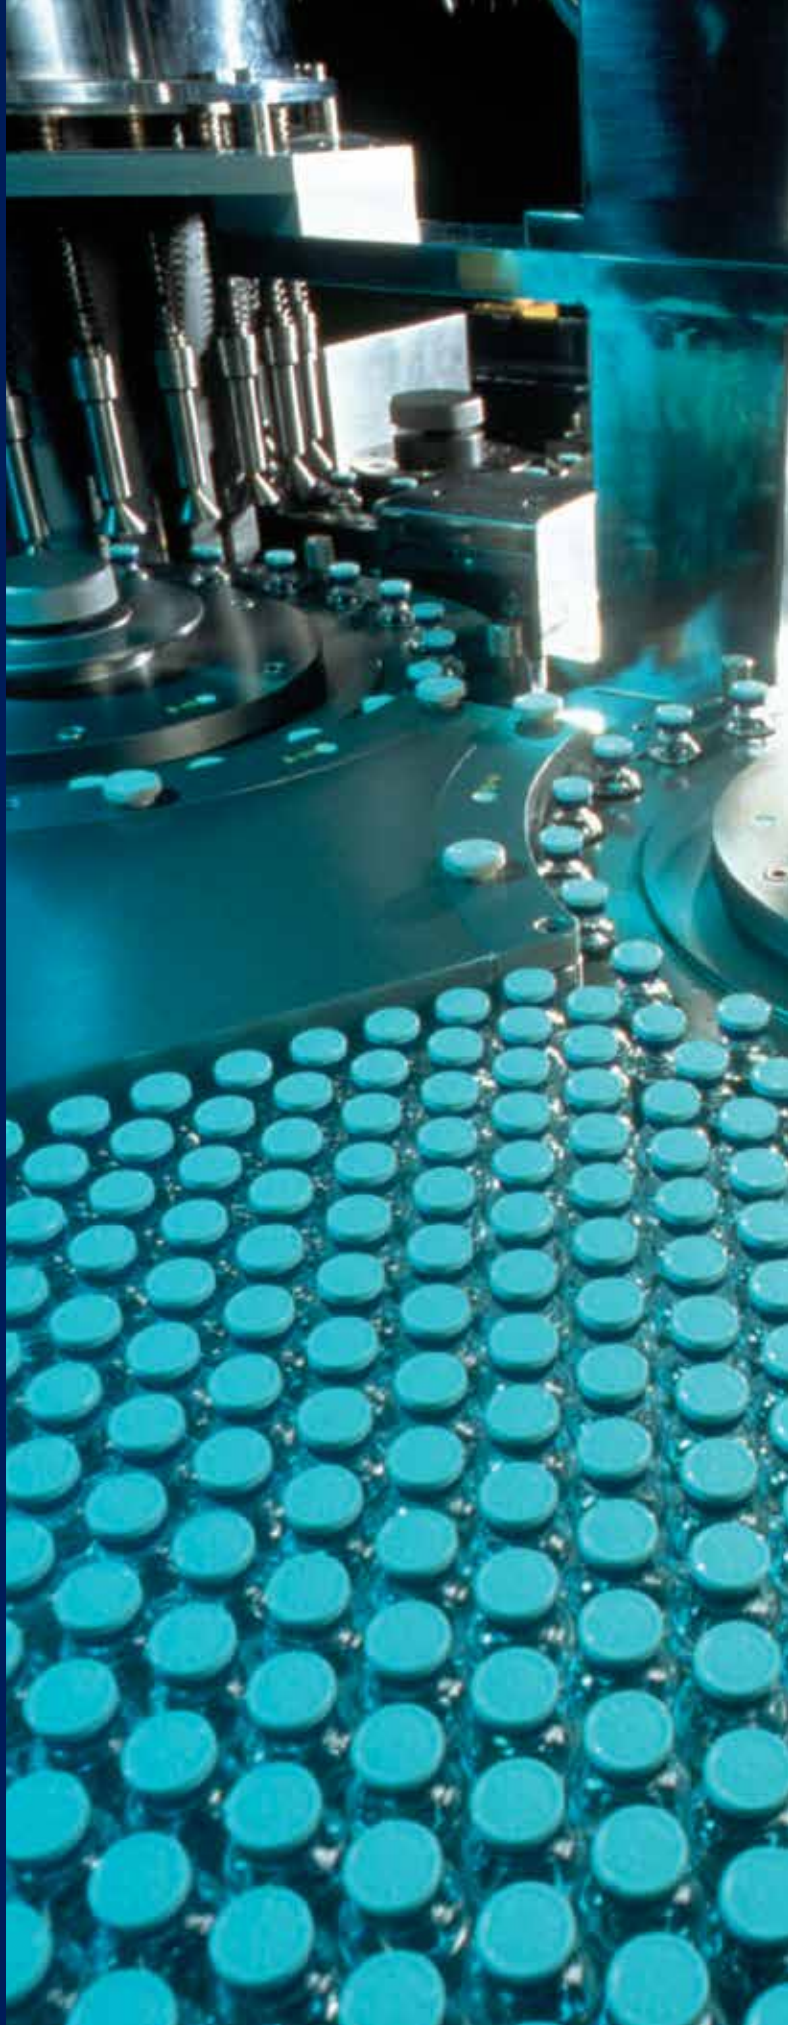

Intro

PFA  
Tubing  
**A**

FEP  
Tubing  
**B**

PTFE  
Tubing  
**C**

PVDF  
Tubing  
**D**

ETFE  
Tubing  
**E**

Technical  
Pages  
**F**

Index  
**G**

# PTFE Tubing

Series Fractional & Metric: 101, 201



## Features

- Virgin Polytetrafluoroethylene resin
- Chemically inert
- Lowest coefficient of friction
- Superior dielectric strength
- Exceptional heat resistance
- Self extinguishing
- Non-wetting
- Excellent flexlife
- Laser markable

## Applications/Markets



- Cable Liner
- Electrical Insulation
- Oxygen Sensor
- Paint Transfer
- Gas Sampling
- Laboratory

## Certifications/Compliance

- AMS 3653E
- VW1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant

## Order Information

**Example: 101-0188062-0TC-100**

**101-0188062-0TC-100 – PTFE**

101-**0188**062-0TC-100 – **Tube O.D.** in inches (**3/16"**)

101-0188**062**-0TC-100 – **Tube Wall Thickness** in inches (**.062"**)

101-0188062-**0TC**-100 – **Black**

101-0188062-**0TC**-100 – **Bulk Tubing**

101-0188062-0**TC**-100 – **Solid Color Tube**

101-0188062-0TC-**100** – **Package Quantity** in feet (**100'**)

## Fittings

Fittings available for sizes 3/32" up to 1.1"

Parker Fittings available from:  
Fluid System Connectors Division  
Otsego, MI

(269) 694-2550

(269) 692-6634 FAX

FSC Product Families:

- Compression
- Compress-Align®
- Fast & Tite
- TrueSeal™

## Notes








- Working Temperature: 500°F (260°C)
- Working pressure calculated using a Design Factor of 4 at 73°F (23°C)
- Custom packaging and sizes are quoted upon request
- Package quantities are not continuous

## Colors


- ○ Natural, Translucent
- Colors available as custom run, see color code table

| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## 101 PTFE Industrial Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |         |       |        | Nominal I.D.  |         |       |        | Reference Wall  |      | Working Pressure   |          | Burst Pressure  |          | Min. Bend Radius  |     | Vac. Rating | Weight  |   |
|-------------|------------|---|---------|-------|--------|---|---------|-------|--------|---|------|--|----------|---|----------|---|-----|-------------|---|---|
| #           |            |  |         |       |        |  |         |       |        |  |      |  |          |  |          |  |     |             |  |  |
|             | inch       | inch  | tol.    | mm    | tol.   | inch  | tol.    | mm    | tol.   | inch  | mm   | psi 73°F   | bar 23°C | psi 73°F  | bar 23°C | inch  | mm  | at 73°F     | lb. per ft.   | kg per m.   |
| 101-0094031 | 3/32       | 0.094   | ± 0.005 | 2.40  | ± 0.13 | 0.031   | ± 0.002 | 0.79  | ± 0.05 | 0.031   | 0.79 | 390  | 27       | 1560  | 108      | 0.500   | 13  | 28          | 0.006   | 0.009   |
| 101-0125031 | 1/8        | 0.125   | ± 0.005 | 3.18  | ± 0.13 | 0.063   | ± 0.003 | 1.57  | ± 0.05 | 0.031   | 0.79 | 290  | 20       | 1160  | 80       | 0.500   | 13  | 28          | 0.009   | 0.013   |
| 101-0156031 | 5/32       | 0.156   | ± 0.005 | 3.99  | ± 0.13 | 0.094   | ± 0.004 | 2.39  | ± 0.08 | 0.031   | 0.79 | 220  | 15       | 880   | 61       | 0.625   | 16  | 28          | 0.011   | 0.017   |
| 101-0188031 | 3/16       | 0.188   | ± 0.005 | 4.78  | ± 0.13 | 0.125   | ± 0.005 | 3.18  | ± 0.13 | 0.031   | 0.79 | 180  | 12       | 720   | 50       | 0.750   | 19  | 28          | 0.014   | 0.021   |
| 101-0250031 | 1/4        | 0.250   | ± 0.005 | 6.35  | ± 0.13 | 0.190   | ± 0.005 | 4.83  | ± 0.13 | 0.031   | 0.79 | 130  | 9        | 520   | 36       | 1.000   | 25  | 28          | 0.020   | 0.030   |
| 101-0312031 | 5/16       | 0.312   | ± 0.005 | 7.92  | ± 0.13 | 0.250   | ± 0.007 | 6.35  | ± 0.18 | 0.031   | 0.79 | 100  | 7        | 400   | 28       | 2.250   | 57  | 28          | 0.026   | 0.038   |
| 101-0375031 | 3/8        | 0.375   | ± 0.005 | 9.52  | ± 0.13 | 0.312   | ± 0.006 | 7.92  | ± 0.15 | 0.031   | 0.79 | 80   | 6        | 320   | 22       | 2.750   | 70  | 28          | 0.032   | 0.047   |
| 101-0438031 | 7/16       | 0.438   | ± 0.005 | 11.13 | ± 0.13 | 0.375   | ± 0.007 | 9.52  | ± 0.18 | 0.031   | 0.79 | 70   | 5        | 280   | 19       | 4.000   | 102 | 28          | 0.037   | 0.056   |
| 101-0500031 | 1/2        | 0.500   | ± 0.006 | 12.70 | ± 0.15 | 0.438   | ± 0.008 | 11.13 | ± 0.20 | 0.031   | 0.79 | 60   | 4        | 240   | 17       | 4.000   | 102 | 28          | 0.043   | 0.064   |
| 101-0563031 | 9/16       | 0.563   | ± 0.007 | 14.30 | ± 0.18 | 0.500   | ± 0.010 | 12.70 | ± 0.25 | 0.031   | 0.79 | 55   | 4        | 220   | 15       | 5.000   | 127 | 28          | 0.049   | 0.073   |
| 101-0625031 | 5/8        | 0.625   | ± 0.007 | 15.88 | ± 0.18 | 0.563   | ± 0.010 | 14.30 | ± 0.25 | 0.031   | 0.79 | 50   | 3        | 200   | 14       | 5.500   | 140 | 28          | 0.054   | 0.081   |
| 101-0688031 | 11/16      | 0.688   | ± 0.010 | 17.48 | ± 0.25 | 0.625   | ± 0.012 | 15.88 | ± 0.31 | 0.031   | 0.79 | 45   | 3        | 180   | 12       | 6.250   | 159 | 28          | 0.060   | 0.090   |
| 101-0750032 | 3/4        | 0.750   | ± 0.010 | 19.05 | ± 0.25 | 0.688   | ± 0.012 | 17.48 | ± 0.31 | 0.032   | 0.81 | 40   | 3        | 160   | 11       | 6.500   | 165 | 28          | 0.068   | 0.101   |
| 101-0830040 | 0.830      | 0.830   | ± 0.014 | 21.08 | ± 0.36 | 0.750   | ± 0.014 | 19.05 | ± 0.36 | 0.040   | 1.02 | 45   | 3        | 180   | 12       | 8.000   | 203 | 28          | 0.093   | 0.139   |
| 101-0965045 | 0.965      | 0.965   | ± 0.016 | 24.51 | ± 0.41 | 0.875   | ± 0.016 | 22.22 | ± 0.41 | 0.045   | 1.14 | 45   | 3        | 180   | 12       | 12.000  | 305 | 28          | 0.122   | 0.182   |
| 101-1100050 | 1.100      | 1.100   | ± 0.020 | 27.94 | ± 0.51 | 1.000   | ± 0.020 | 25.40 | ± 0.51 | 0.050   | 1.27 | 40   | 3        | 160   | 11       | 18.000  | 457 | 28          | 0.155   | 0.231   |

## PTFE Tubing (Series 101, 201) Maximum Working Pressure (bar)

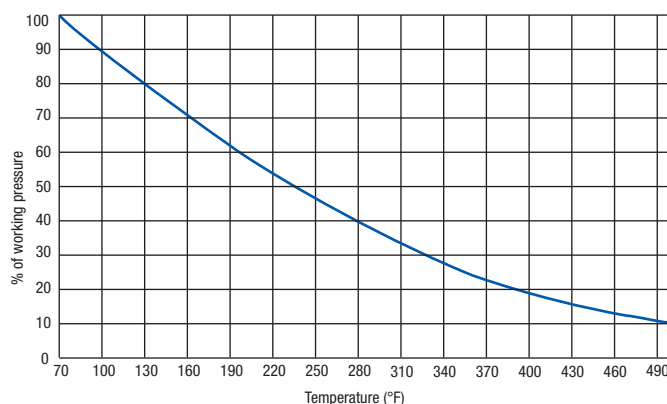









Continued on next page

For detailed ordering information, please consult price list or contact Parker TexLoc®.









Parker Hannifin Corporation | Parflex® Division, TexLoc® | Fort Worth, Tx | [www.texloc.com](http://www.texloc.com)

C03

## 101 PTFE Heavy Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |        |       |        |       | Nominal I.D.  |       |        |       |      | Reference Wall  |          | Working Pressure   |          | Burst Pressure  |     | Min. Bend Radius  |             | Vac. Rating | Weight  |   |
|-------------|------------|---|--------|-------|--------|-------|---|-------|--------|-------|------|---|----------|--|----------|---|-----|---|-------------|-------------|---|---|
| #           |            |  |        |       |        |       |  |       |        |       |      |  |          |  |          |  |     |  |             |             |  |  |
|             | inch       | inch  | tol.   | mm    | tol.   | inch  | tol.  | mm    | tol.   | inch  | mm   | psi 73°F  | bar 23°C | psi 73°F   | bar 23°C | inch  | mm  | at 73°F   | lb. per ft. | kg. per m.  |   |   |
| 101-0188062 | 3/16       | .188  | ± .005 | 4.78  | ± 0.13 | 0.063 | ± 0.003   | 1.57  | ± 0.05 | 0.062 | 1.57 | 390   | 27       | 1560   | 108      | 0.250   | 6   | 28  | 0.023       | 0.034       |   |   |
| 101-0250047 | 1/4        | .250  | ± .005 | 6.35  | ± 0.13 | 0.157 | ± 0.005   | 3.99  | ± 0.13 | 0.047 | 1.19 | 210   | 14       | 840  | 58       | 0.625   | 16  | 28  | 0.028       | 0.042       |   |   |
| 101-0250062 | 1/4        | .250  | ± .005 | 6.35  | ± 0.13 | 0.125 | ± 0.005   | 3.18  | ± 0.13 | 0.062 | 1.57 | 290   | 20       | 1160   | 80       | 0.500   | 13  | 28  | 0.034       | 0.051       |   |   |
| 101-0312062 | 5/16       | .312  | ± .005 | 7.92  | ± 0.13 | 0.188 | ± 0.006   | 4.76  | ± 0.15 | 0.062 | 1.57 | 222   | 15       | 888  | 61       | 0.875   | 22  | 28  | 0.046       | 0.068       |   |   |
| 101-0375062 | 3/8        | .375  | ± .005 | 9.52  | ± 0.13 | 0.250 | ± 0.005   | 6.35  | ± 0.13 | 0.062 | 1.57 | 180   | 12       | 720  | 50       | 1.000   | 25  | 28  | 0.057       | 0.085       |   |   |
| 101-0438062 | 7/16       | .438  | ± .005 | 11.13 | ± 0.13 | 0.312 | ± 0.007   | 7.92  | ± 0.18 | 0.062 | 1.57 | 150   | 10       | 600  | 41       | 2.250   | 57  | 28  | 0.069       | 0.103       |   |   |
| 101-0500062 | 1/2        | .500  | ± .005 | 12.70 | ± 0.13 | 0.375 | ± 0.005   | 9.52  | ± 0.13 | 0.062 | 1.57 | 130   | 9        | 520  | 36       | 2.250   | 57  | 28  | 0.080       | 0.120       |   |   |
| 101-0563062 | 9/16       | .563  | ± .007 | 14.30 | ± 0.18 | 0.437 | ± 0.008   | 11.13 | ± 0.20 | 0.062 | 1.57 | 110   | 8        | 440  | 30       | 2.750   | 70  | 28  | 0.092       | 0.137       |   |   |
| 101-0625062 | 5/8        | .625  | ± .007 | 15.88 | ± 0.18 | 0.500 | ± 0.010   | 12.70 | ± 0.25 | 0.062 | 1.57 | 100   | 7        | 400  | 28       | 3.000   | 76  | 28  | 0.103       | 0.154       |   |   |
| 101-0688062 | 11/16      | .688  | ± .010 | 17.48 | ± 0.25 | 0.563 | ± 0.010   | 14.30 | ± 0.25 | 0.062 | 1.57 | 90  | 6        | 360  | 25       | 5.000   | 127 | 28  | 0.115       | 0.171       |   |   |
| 101-0750062 | 3/4        | .750  | ± .010 | 19.05 | ± 0.25 | 0.625 | ± 0.010   | 15.88 | ± 0.25 | 0.062 | 1.57 | 80  | 6        | 320  | 22       | 6.000   | 152 | 28  | 0.126       | 0.188       |   |   |
| 101-0875062 | 7/8        | .875  | ± .014 | 22.22 | ± 0.36 | 0.750 | ± 0.014   | 19.05 | ± 0.36 | 0.062 | 1.57 | 70  | 5        | 280  | 19       | 7.250   | 184 | 28  | 0.149       | 0.222       |   |   |
| 101-1000062 | 1          | 1.000   | ± .016 | 25.40 | ± 0.25 | 0.875 | ± 0.016   | 22.22 | ± 0.36 | 0.062 | 1.57 | 100   | 6.9      | 400  | 28       | 8.000   | 203 | 28  | 0.172       | 0.256       |   |   |

## 201 Metric PTFE Tubing

| Part Number | Order Size | Nominal O.D.  |        |       |         | Nominal I.D.  |        |       |         | Reference Wall  |       | Working Pressure  |          | Burst Pressure  |          | Min. Bend Radius  |       | Vac. Rating | Weight  |   |
|-------------|------------|---|--------|-------|---------|---|--------|-------|---------|---|-------|---|----------|---|----------|---|-------|-------------|---|---|
| #           |            |  |        |       |         |  |        |       |         |  |       |  |          |  |          |  |       |             |  |  |
|             | mm         | mm  | tol.   | inch  | tol.    | mm  | tol.   | inch  | tol.    | mm  | inch  | bar 23°C  | psi 73°F | bar 23°C  | psi 73°F | mm  | inch  | at 73°F     | kg. per m.  | lb. per ft.   |
| 201-0300100 | 3          | 3   | ± 0.11 | 0.118 | ± 0.004 | 1   | ± 0.11 | 0.039 | ± 0.004 | 1   | 0.039 | 27  | 390      | 108   | 1560     | 13  | 0.500 | 28          | 0.014   | 0.009   |
| 201-0400100 | 4          | 4   | ± 0.11 | 0.157 | ± 0.004 | 2   | ± 0.11 | 0.074 | ± 0.004 | 1   | 0.039 | 20  | 290      | 80  | 1160     | 13  | 0.500 | 28          | 0.020   | 0.014   |
| 201-0500100 | 5          | 5   | ± 0.11 | 0.197 | ± 0.004 | 3   | ± 0.11 | 0.118 | ± 0.004 | 1   | 0.039 | 15  | 220      | 61  | 880      | 19  | 0.750 | 28          | 0.027   | 0.018   |
| 201-0600100 | 6          | 6   | ± 0.13 | 0.236 | ± 0.005 | 4   | ± 0.13 | 0.157 | ± 0.005 | 1   | 0.039 | 12  | 180      | 50  | 720      | 25  | 1.000 | 28          | 0.034   | 0.023   |
| 201-0700100 | 7          | 7   | ± 0.13 | 0.276 | ± 0.005 | 5   | ± 0.13 | 0.197 | ± 0.005 | 1   | 0.039 | 10  | 150      | 41  | 600      | 38  | 1.500 | 28          | 0.041   | 0.027   |
| 201-0800100 | 8          | 8   | ± 0.13 | 0.315 | ± 0.005 | 6   | ± 0.13 | 0.236 | ± 0.005 | 1   | 0.039 | 9   | 130      | 36  | 520      | 51  | 2.000 | 28          | 0.048   | 0.032   |
| 201-0900100 | 9          | 9   | ± 0.13 | 0.354 | ± 0.005 | 7   | ± 0.13 | 0.276 | ± 0.005 | 1   | 0.039 | 8   | 110      | 30  | 440      | 57  | 2.250 | 28          | 0.055   | 0.037   |
| 201-1000100 | 10         | 10  | ± 0.13 | 0.394 | ± 0.005 | 8   | ± 0.13 | 0.315 | ± 0.005 | 1   | 0.039 | 7   | 100      | 28  | 400      | 64  | 2.500 | 28          | 0.061   | 0.041   |
| 201-1200100 | 12         | 12  | ± 0.15 | 0.472 | ± 0.006 | 10  | ± 0.15 | 0.394 | ± 0.006 | 1   | 0.039 | 6   | 80       | 22  | 320      | 76  | 3.000 | 28          | 0.075   | 0.050   |
| 201-1400100 | 14         | 14  | ± 0.15 | 0.551 | ± 0.006 | 12  | ± 0.15 | 0.472 | ± 0.006 | 1   | 0.039 | 70  | 5        | 19  | 280      | 89  | 3.500 | 28          | 0.089   | 0.060   |
| 201-1600100 | 16         | 16  | ± 0.15 | 0.630 | ± 0.006 | 14  | ± 0.15 | 0.551 | ± 0.006 | 1   | 0.039 | 60  | 4        | 17  | 240      | 108   | 4.250 | 28          | 0.102   | 0.069   |

For detailed ordering information, please consult price list or contact Parker TexLoc®.

# PTFE Tubing

## Series Fractional: TFL, TFS, TFT



### Features

- Virgin Polytetrafluoroethylene resin
- Chemically inert
- Lowest coefficient of friction
- Superior dielectric strength
- Exceptional heat resistance
- Self extinguishing
- Non-wetting
- Excellent flexlife
- Laser markable

### Applications/Markets



- Electrical Insulation
- Protective Cover
- Cable Liner
- Spacer

### Certifications/Compliance

- AMS 3653E
- VW1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant
- **Light Wall** (TFL) – ASTM D3295 Class 1
- **Thin Wall** (TFT) – ASTM D3295 Class 2, AMS 3655B
- **Standard Wall** (TFS) – ASTM D3295 Class 3, MIL-I-22129C

### Order Information

**Example: TFS1/2-NT**

**TFS1/2-NT – PTFE**

**TFS1/2-NT – Standard Wall**

**TFS1/2-NT – Tube O.D. in inches (1/2")**

**TFS1/2-NT – Natural**

**TFS1/2-NT – Bulk Tubing**

### Fittings

Fittings available for sizes 3/32" up to 1.1"

Parker Fittings available from:  
Fluid System Connectors Division  
Otsego, MI

(269) 694-2550

(269) 692-6634 FAX

FSC Product Families:

- Compression
- Compress-Align®
- Fast & Tite
- TrueSeal™

### Notes





- Working Temperature: 500°F (260°C)
- Package quantities are not continuous - Fractional tubing is supplied in random length coils, with a minimum coil length of 15 feet.
- Custom packaging, sizes and lengths are quoted upon request.

### Colors

- ○ Natural, Translucent
- Colors available as custom run, see color code table

| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## TFS, TFT & TFL PTFE Fractional Tubing

| Size | Nominal I.D.  |       | Standard Wall |   |      | Thin Wall   |   |      | Light Wall  |   |      | Standard Packaging |
|------|---|-------|---------------|---|------|-------------|---|------|-------------|---|------|--------------------|
|      |   |       | Part Number   | Nominal Wall  |      | Part Number | Nominal Wall  |      | Part Number | Nominal Wall  |      |                    |
|      |  |       | #             |  |      | #           |  |      | #           |  |      |                    |
| inch | inch  | mm    | Natural       | inch  | mm   | Natural     | inch  | mm   | Natural     | inch  | mm   |                    |
| 1/8  | 0.125   | 3.18  | TFS1/8        | 0.020   | 0.51 | TFT1/8      | 0.015   | 0.38 | TFL1/8      | 0.008   | 0.20 | Random Length Coil |
| 3/16 | 0.188   | 4.78  | TFS3/16       | 0.020   | 0.51 | TFT3/16     | 0.015   | 0.38 | TFL3/16     | 0.010   | 0.25 | Random Length Coil |
| 1/4  | 0.250   | 6.35  | TFS1/4        | 0.020   | 0.51 | TFT1/4      | 0.015   | 0.38 | TFL1/4      | 0.010   | 0.25 | Random Length Coil |
| 5/16 | 0.318   | 7.92  | TFS5/16       | 0.020   | 0.51 | TFT5/16     | 0.015   | 0.38 | TFL5/16     | 0.012   | 0.30 | Random Length Coil |
| 3/8  | 0.381   | 9.52  | TFS3/8        | 0.025   | 0.64 | TFT3/8      | 0.015   | 0.38 | TFL3/8      | 0.015   | 0.38 | Random Length Coil |
| 7/16 | 0.444   | 11.13 | TFS7/16       | 0.025   | 0.64 | TFT7/16     | 0.018   | 0.46 | TFL7/16     | 0.018   | 0.46 | Random Length Coil |
| 1/2  | 0.507   | 12.70 | TFS1/2        | 0.025   | 0.64 | TFT1/2      | 0.018   | 0.46 | TFL1/2      | 0.018   | 0.46 | Random Length Coil |
| 5/8  | 0.632   | 15.88 | TFS5/8        | 0.025   | 0.64 | TFT5/8      | 0.020   | 0.51 | -           | -   | -    | Random Length Coil |
| 3/4  | 0.760   | 19.05 | TFS3/4        | 0.030   | 0.76 | TFT3/4      | 0.025   | 0.64 | -           | -   | -    | Random Length Coil |
| 7/8  | 0.885   | 22.22 | TFS7/8        | 0.035   | 0.89 | -           | -   | -    | -           | -   | -    | Random Length Coil |
| 1    | 1.010   | 25.40 | TFS1.00       | 0.035   | 0.89 | -           | -   | -    | -           | -   | -    | Random Length Coil |

For detailed ordering information, please consult price list or contact Parker TexLoc®.

# PTFE Tubing

Series AWG: TFH, TFS, TFT, TFL



## Features

- Virgin Polytetrafluoroethylene resin
- Chemically inert
- Lowest coefficient of friction
- Superior dielectric strength
- Exceptional heat resistance
- Self extinguishing
- Non-wetting
- Excellent flexlife
- Laser markable

## Applications/Markets



- Electrical Insulation
- Protective Cover
- Circuit Board
- Wire Insulation
- Strain Relief
- Introducer
- Stent Delivery

## Certifications/Compliance

- AMS 3653E
- VW1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant
- **Light Wall** (TFL) – ASTM D3295 Class 1, UL-224 150V 200°C
- **Thin Wall** (TFT) – ASTM D3295 Class 2, AMS 3655B, UL-224 300V 200°C, CSA 9032-01 300V
- **Standard Wall** (TFS) – ASTM D3295 Class 3, MIL-I-22129C, UL-224 600V 200°C, CSA 9032-01 600V
- **Heavy Wall** (TFH) – ASTM D3295, Class 4

## Order Information

**Example: TFH13-2TC**

**TFH13-2TC** – PTFE

**TFH13-2TC** – Heavy Wall

**TFH13-2TC** – AWG Size

**TFH13-2TC** – Red

**TFH13-2TC** – Bulk Tubing

**TFH13-2TC** – Solid Color Tube

## Notes





- Working Temperature: 500°F (260°C)
- AWG Spaghetti tubing is supplied in random lengths with a minimum length of 25 feet
- Continuous lengths and colors quoted upon request
- AWG spaghetti tubing is also available in FEP and PFA
- Consult factory for pricing and minimum lengths

## Colors

- ○ Natural, Translucent
- Colors available as custom run, see color code table

| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## TFH PTFE AWG Heavy Wall

| Part Number | Order Size | Nominal I.D.  |      | Minimum I.D.  |      | Maximum I.D.  |      | Nominal Wall   |             | Standard Packaging |
|-------------|------------|---|------|---|------|---|------|--|-------------|--------------------|
| #           |            |  |      |  |      |  |      |  |             |                    |
|             | AWG        | inch  | mm   | inch  | mm   | inch  | mm   | inch   | mm          |                    |
| TFH24       | 24         | 0.022   | 0.56 | 0.020   | 0.51 | 0.026   | 0.66 | 0.016 ± 0.003  | 0.41 ± 0.08 | 1,000 ft. Spool    |
| TFH23       | 23         | 0.026   | 0.66 | 0.023   | 0.58 | 0.029   | 0.74 | 0.016 ± 0.003  | 0.41 ± 0.08 | 1,000 ft. Spool    |
| TFH22       | 22         | 0.028   | 0.71 | 0.025   | 0.64 | 0.032   | 0.81 | 0.016 ± 0.003  | 0.41 ± 0.08 | 1,000 ft. Spool    |
| TFH21       | 21         | 0.032   | 0.81 | 0.029   | 0.74 | 0.035   | 0.89 | 0.016 ± 0.003  | 0.41 ± 0.08 | 1,000 ft. Spool    |
| TFH20       | 20         | 0.034   | 0.86 | 0.032   | 0.81 | 0.040   | 1.02 | 0.018 ± 0.003  | 0.46 ± 0.08 | 1,000 ft. Spool    |
| TFH19       | 19         | 0.038   | 0.97 | 0.036   | 0.91 | 0.044   | 1.12 | 0.020 ± 0.004  | 0.51 ± 0.10 | 1,000 ft. Spool    |
| TFH18       | 18         | 0.042   | 1.07 | 0.040   | 1.02 | 0.049   | 1.25 | 0.020 ± 0.004  | 0.51 ± 0.10 | 1,000 ft. Spool    |
| TFH17       | 17         | 0.048   | 1.22 | 0.045   | 1.14 | 0.054   | 1.37 | 0.020 ± 0.004  | 0.51 ± 0.10 | 1,000 ft. Spool    |
| TFH16       | 16         | 0.053   | 1.35 | 0.051   | 1.30 | 0.061   | 1.55 | 0.020 ± 0.004  | 0.51 ± 0.10 | 1,000 ft. Spool    |
| TFH15       | 15         | 0.059   | 1.50 | 0.057   | 1.45 | 0.067   | 1.70 | 0.020 ± 0.004  | 0.51 ± 0.10 | 1,000 ft. Spool    |
| TFH14       | 14         | 0.066   | 1.68 | 0.064   | 1.63 | 0.074   | 1.88 | 0.020 ± 0.004  | 0.51 ± 0.10 | 500 ft. Spool      |
| TFH13       | 13         | 0.076   | 1.93 | 0.072   | 1.83 | 0.082   | 2.08 | 0.020 ± 0.004  | 0.51 ± 0.10 | 500 ft. Spool      |
| TFH12       | 12         | 0.085   | 2.16 | 0.081   | 2.06 | 0.091   | 2.31 | 0.020 ± 0.004  | 0.51 ± 0.10 | 500 ft. Spool      |
| TFH11       | 11         | 0.095   | 2.41 | 0.091   | 2.31 | 0.101   | 2.57 | 0.020 ± 0.004  | 0.51 ± 0.10 | 500 ft. Spool      |
| TFH10       | 10         | 0.106   | 2.69 | 0.102   | 2.59 | 0.112   | 2.84 | 0.025 ± 0.005  | 0.64 ± 0.13 | 500 ft. Spool      |
| TFH09       | 9          | 0.118   | 3.00 | 0.114   | 2.90 | 0.124   | 3.15 | 0.025 ± 0.005  | 0.64 ± 0.13 | 500 ft. Spool      |
| TFH08       | 8          | 0.133   | 3.38 | 0.129   | 3.28 | 0.141   | 3.58 | 0.030 ± 0.005  | 0.76 ± 0.13 | Random Length Coil |
| TFH07       | 7          | 0.148   | 3.76 | 0.144   | 3.66 | 0.158   | 4.01 | 0.030 ± 0.005  | 0.76 ± 0.13 | Random Length Coil |
| TFH06       | 6          | 0.166   | 4.22 | 0.162   | 4.11 | 0.178   | 4.52 | 0.030 ± 0.005  | 0.76 ± 0.13 | Random Length Coil |
| TFH05       | 5          | 0.185   | 4.70 | 0.182   | 4.62 | 0.196   | 4.98 | 0.032 ± 0.005  | 0.81 ± 0.13 | Random Length Coil |

## Certifications

- ASTM D3295 Class 4
- AMS 3653E
- FDA Compliant
- USP Class VI Compliant

# PTFE Tubing

## Series AWG: TFH, TFL, TFS, TFT (cont.)

### TFS PTFE AWG Standard Wall

| Part Number | Order Size | Nominal I.D. |      | Minimum I.D. |      | Maximum I.D. |      | Nominal Wall |             | Standard Packaging |
|-------------|------------|--------------|------|--------------|------|--------------|------|--------------|-------------|--------------------|
| #           |            |              |      |              |      |              |      |              |             |                    |
|             | AWG        | inch         | mm   | inch         | mm   | inch         | mm   | inch         | mm          |                    |
| TFS30       | 30         | 0.012        | 0.31 | 0.010        | 0.25 | 0.015        | 0.38 | .009 ± .002  | 0.23 ± 0.05 | 1,000 ft. Spool    |
| TFS28       | 28         | 0.015        | 0.38 | 0.013        | 0.33 | 0.018        | 0.46 | .009 ± .002  | 0.23 ± 0.05 | 1,000 ft. Spool    |
| TFS26       | 26         | 0.018        | 0.46 | 0.016        | 0.41 | 0.022        | 0.56 | .009 ± .002  | 0.23 ± 0.05 | 1,000 ft. Spool    |
| TFS24       | 24         | 0.022        | 0.56 | 0.020        | 0.51 | 0.026        | 0.66 | .012 ± .003  | 0.31 ± 0.08 | 1,000 ft. Spool    |
| TFS23       | 23         | 0.026        | 0.66 | 0.023        | 0.58 | 0.029        | 0.74 | .012 ± .003  | 0.31 ± 0.08 | 1,000 ft. Spool    |
| TFS22       | 22         | 0.028        | 0.71 | 0.025        | 0.64 | 0.032        | 0.81 | .012 ± .003  | 0.31 ± 0.08 | 1,000 ft. Spool    |
| TFS21       | 21         | 0.032        | 0.81 | 0.029        | 0.74 | 0.035        | 0.89 | .012 ± .003  | 0.31 ± 0.08 | 1,000 ft. Spool    |
| TFS20       | 20         | 0.034        | 0.86 | 0.032        | 0.81 | 0.040        | 1.02 | .016 ± .003  | 0.41 ± .008 | 1,000 ft. Spool    |
| TFS19       | 19         | 0.038        | 0.97 | 0.036        | 0.91 | 0.044        | 1.12 | .016 ± .003  | 0.41 ± .008 | 1,000 ft. Spool    |
| TFS18       | 18         | 0.042        | 1.07 | 0.040        | 1.02 | 0.049        | 1.25 | .016 ± .003  | 0.41 ± .008 | 1,000 ft. Spool    |
| TFS17       | 17         | 0.048        | 1.22 | 0.045        | 1.14 | 0.054        | 1.37 | .016 ± .003  | 0.41 ± .008 | 1,000 ft. Spool    |
| TFS16       | 16         | 0.053        | 1.35 | 0.051        | 1.30 | 0.061        | 1.55 | .016 ± .003  | 0.41 ± .008 | 1,000 ft. Spool    |
| TFS15       | 15         | 0.059        | 1.50 | 0.057        | 1.45 | 0.067        | 1.70 | .016 ± .003  | 0.41 ± .008 | 500 ft. Spool      |
| TFS14       | 14         | 0.066        | 1.68 | 0.064        | 1.63 | 0.074        | 1.88 | .016 ± .003  | 0.41 ± .008 | 500 ft. Spool      |
| TFS13       | 13         | 0.076        | 1.93 | 0.072        | 1.83 | 0.082        | 2.08 | .016 ± .003  | 0.41 ± .008 | 500 ft. Spool      |
| TFS12       | 12         | 0.085        | 2.16 | 0.081        | 2.06 | 0.091        | 2.31 | .016 ± .003  | 0.41 ± .008 | 500 ft. Spool      |
| TFS11       | 11         | 0.095        | 2.41 | 0.091        | 2.31 | 0.101        | 2.57 | .016 ± .003  | 0.41 ± .008 | 500 ft. Spool      |
| TFS10       | 10         | 0.106        | 2.69 | 0.102        | 2.59 | 0.112        | 2.84 | .016 ± .003  | 0.41 ± .008 | 500 ft. Spool      |
| TFS09       | 9          | 0.118        | 3.00 | 0.114        | 2.90 | 0.124        | 3.15 | .020 ± .004  | 0.51 ± .010 | Random Length Coil |
| TFS08       | 8          | 0.133        | 3.38 | 0.129        | 3.28 | 0.141        | 3.58 | .020 ± .004  | 0.51 ± .010 | Random Length Coil |
| TFS07       | 7          | 0.148        | 3.76 | 0.144        | 3.66 | 0.158        | 4.01 | .020 ± .004  | 0.51 ± .010 | Random Length Coil |
| TFS06       | 6          | 0.166        | 4.22 | 0.162        | 4.11 | 0.178        | 4.52 | .020 ± .004  | 0.51 ± .010 | Random Length Coil |
| TFS05       | 5          | 0.185        | 4.70 | 0.182        | 4.62 | 0.196        | 4.98 | .020 ± .004  | 0.51 ± .010 | Random Length Coil |
| TFS04       | 4          | 0.208        | 5.28 | 0.204        | 5.18 | 0.224        | 5.69 | .020 ± .004  | 0.51 ± .010 | Random Length Coil |
| TFS03       | 3          | 0.234        | 5.94 | 0.229        | 5.82 | 0.249        | 6.32 | .020 ± .004  | 0.51 ± .010 | Random Length Coil |
| TFS02       | 2          | 0.263        | 6.68 | 0.258        | 6.55 | 0.278        | 7.06 | .020 ± .004  | 0.51 ± .010 | Random Length Coil |
| TFS01       | 1          | 0.294        | 7.47 | 0.289        | 7.34 | 0.311        | 7.90 | .020 ± .004  | 0.51 ± .010 | Random Length Coil |
| TFS00       | 0          | 0.330        | 8.38 | 0.325        | 8.25 | 0.347        | 8.81 | .020 ± .004  | 0.51 ± .010 | Random Length Coil |

### Certifications





- ASTM D3295 Class 3
- MIL-I-22129C
- AMS 3653E
- UL-224 600V 200°C
- CSA 9032-01 600V
- FDA Compliant

For detailed ordering information, please consult price list or contact Parker TexLoc®.



Parker Hannifin Corporation | Parflex® Division, TexLoc® | Fort Worth, Tx | [www.texloc.com](http://www.texloc.com)

## TFT PTFE AWG Thin Wall

| Part Number | Order Size | Nominal I.D.  |      | Minimum I.D.  |      | Maximum I.D.  |      | Nominal Wall   |             | Standard Packaging   |
|-------------|------------|---|------|---|------|---|------|--|-------------|----------------------|
| #           |            |  |      |  |      |  |      |  |             |                      |
|             | AWG        | inch  | mm   | inch  | mm   | inch  | mm   | inch   | mm          |                      |
| TFT32       | 32         | .010  | 0.25 | .008  | 0.20 | .012  | 0.31 | 0.007 ± 0.002  | 0.18 ± 0.05 | 1,000 ft. Spool Only |
| TFT30       | 30         | .012  | 0.31 | .010  | 0.25 | .015  | 0.38 | 0.009 ± 0.002  | 0.23 ± 0.05 | 1,000 ft. Spool      |
| TFT28       | 28         | .015  | 0.38 | .013  | 0.33 | .018  | 0.46 | 0.009 ± 0.002  | 0.23 ± 0.05 | 1,000 ft. Spool      |
| TFT26       | 26         | .018  | 0.46 | .016  | 0.41 | .022  | 0.56 | 0.009 ± 0.002  | 0.23 ± 0.05 | 1,000 ft. Spool      |
| TFT24       | 24         | .022  | 0.56 | .020  | 0.51 | .026  | 0.66 | 0.010 ± 0.003  | 0.25 ± 0.08 | 1,000 ft. Spool      |
| TFT23       | 23         | .026  | 0.66 | .023  | 0.58 | .029  | 0.74 | 0.010 ± 0.003  | 0.25 ± 0.08 | 1,000 ft. Spool      |
| TFT22       | 22         | .028  | 0.71 | .025  | 0.64 | .032  | 0.81 | 0.010 ± 0.003  | 0.25 ± 0.08 | 1,000 ft. Spool      |
| TFT21       | 21         | .032  | 0.81 | .029  | 0.74 | .035  | 0.89 | 0.010 ± 0.003  | 0.25 ± 0.08 | 1,000 ft. Spool      |
| TFT20       | 20         | .034  | 0.86 | .032  | 0.81 | .040  | 1.02 | 0.012 ± 0.003  | 0.31 ± 0.08 | 1,000 ft. Spool      |
| TFT19       | 19         | .038  | 0.97 | .036  | 0.91 | .044  | 1.12 | 0.012 ± 0.003  | 0.31 ± 0.08 | 1,000 ft. Spool      |
| TFT18       | 18         | .042  | 1.07 | .040  | 1.02 | .049  | 1.25 | 0.012 ± 0.003  | 0.31 ± 0.08 | 1,000 ft. Spool      |
| TFT17       | 17         | .048  | 1.22 | .045  | 1.14 | .054  | 1.37 | 0.012 ± 0.003  | 0.31 ± 0.08 | 1,000 ft. Spool      |
| TFT16       | 16         | .053  | 1.35 | .051  | 1.30 | .061  | 1.55 | 0.012 ± 0.003  | 0.31 ± 0.08 | 1,000 ft. Spool      |
| TFT15       | 15         | .059  | 1.50 | .057  | 1.45 | .067  | 1.70 | 0.012 ± 0.003  | 0.31 ± 0.08 | 1,000 ft. Spool      |
| TFT14       | 14         | .066  | 1.68 | .064  | 1.63 | .074  | 1.88 | 0.012 ± 0.003  | 0.31 ± 0.08 | 500 ft. Spool        |
| TFT13       | 13         | .076  | 1.93 | .072  | 1.83 | .082  | 2.08 | 0.012 ± 0.003  | 0.31 ± 0.08 | 500 ft. Spool        |
| TFT12       | 12         | .085  | 2.16 | .081  | 2.06 | .091  | 2.31 | 0.012 ± 0.003  | 0.31 ± 0.08 | 500 ft. Spool        |
| TFT11       | 11         | .095  | 2.41 | .091  | 2.31 | .101  | 2.57 | 0.012 ± 0.003  | 0.31 ± 0.08 | 500 ft. Spool        |
| TFT10       | 10         | .106  | 2.69 | .102  | 2.59 | .112  | 2.84 | 0.012 ± 0.003  | 0.31 ± 0.08 | 500 ft. Spool        |
| TFT09       | 9          | .118  | 3.00 | .114  | 2.90 | .124  | 3.15 | 0.015 ± 0.003  | 0.38 ± 0.08 | 500 ft. Spool        |
| TFT08       | 8          | .133  | 3.38 | .129  | 3.28 | .141  | 3.58 | 0.015 ± 0.003  | 0.38 ± 0.08 | Random Length Coil   |
| TFT07       | 7          | .148  | 3.76 | .144  | 3.66 | .158  | 4.01 | 0.015 ± 0.003  | 0.38 ± 0.08 | Random Length Coil   |
| TFT06       | 6          | .166  | 4.22 | .162  | 4.11 | .178  | 4.52 | 0.015 ± 0.003  | 0.38 ± 0.08 | Random Length Coil   |
| TFT05       | 5          | .185  | 4.70 | .182  | 4.62 | .196  | 4.98 | 0.015 ± 0.003  | 0.38 ± 0.08 | Random Length Coil   |
| TFT04       | 4          | .208  | 5.28 | .204  | 5.18 | .224  | 5.69 | 0.015 ± 0.003  | 0.38 ± 0.08 | Random Length Coil   |
| TFT03       | 3          | .234  | 5.94 | .229  | 5.82 | .249  | 6.32 | 0.015 ± 0.003  | 0.38 ± 0.08 | Random Length Coil   |
| TFT02       | 2          | .263  | 6.68 | .258  | 6.55 | .278  | 7.06 | 0.015 ± 0.003  | 0.38 ± 0.08 | Random Length Coil   |
| TFT01       | 1          | .294  | 7.47 | .289  | 7.34 | .311  | 7.90 | 0.015 ± 0.003  | 0.38 ± 0.08 | Random Length Coil   |
| TFT00       | 0          | .330  | 8.38 | .325  | 8.25 | .347  | 8.81 | 0.015 ± 0.003  | 0.38 ± 0.08 | Random Length Coil   |

## Certifications

- ASTM D3295 Class 2
- AMS 3653E
- AMS 3655B
- UL-224 300V 200°C
- CSA 9032-01 300V
- FDA Compliant
- USP Class VI Compliant

For detailed ordering information, please consult price list or contact Parker TexLoc®.

# PTFE Tubing

## Series AWG: TFH, TFL, TFS, TFT (cont.)

### TFL PTFE AWG Light Wall

| Part Number | Order Size | Nominal I.D. |      | Minimum I.D. |      | Maximum I.D. |      | Nominal Wall  |             | Standard Packaging   |
|-------------|------------|--------------|------|--------------|------|--------------|------|---------------|-------------|----------------------|
| #           |            |              |      |              |      |              |      |               |             |                      |
|             | AWG        | inch         | mm   | inch         | mm   | inch         | mm   | inch          | mm          |                      |
| TFL32       | 32         | 0.010        | 0.25 | 0.008        | 0.20 | 0.012        | 0.31 | 0.005 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool Only |
| TFL30       | 30         | 0.012        | 0.31 | 0.010        | 0.25 | 0.015        | 0.38 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL28       | 28         | 0.015        | 0.38 | 0.013        | 0.33 | 0.018        | 0.46 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL26       | 26         | 0.018        | 0.46 | 0.016        | 0.41 | 0.022        | 0.56 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL24       | 24         | 0.022        | 0.56 | 0.020        | 0.51 | 0.026        | 0.66 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL23       | 23         | 0.026        | 0.66 | 0.023        | 0.58 | 0.029        | 0.74 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL22       | 22         | 0.028        | 0.71 | 0.025        | 0.64 | 0.032        | 0.81 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL21       | 21         | 0.032        | 0.81 | 0.029        | 0.74 | 0.035        | 0.89 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL20       | 20         | 0.034        | 0.86 | 0.032        | 0.81 | 0.040        | 1.02 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL19       | 19         | 0.038        | 0.97 | 0.036        | 0.91 | 0.044        | 1.12 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL18       | 18         | 0.042        | 1.07 | 0.040        | 1.02 | 0.049        | 1.25 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL17       | 17         | 0.048        | 1.22 | 0.045        | 1.14 | 0.054        | 1.37 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL16       | 16         | 0.053        | 1.35 | 0.051        | 1.30 | 0.061        | 1.55 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL15       | 15         | 0.059        | 1.50 | 0.057        | 1.45 | 0.067        | 1.70 | 0.006 ± 0.002 | 0.13 ± 0.05 | 1,000 ft. Spool      |
| TFL14       | 14         | 0.066        | 1.68 | 0.064        | 1.63 | 0.074        | 1.88 | 0.008 ± 0.002 | 0.20 ± 0.05 | 500 ft. Spool        |
| TFL13       | 13         | 0.076        | 1.93 | 0.072        | 1.83 | 0.082        | 2.08 | 0.008 ± 0.002 | 0.20 ± 0.05 | 500 ft. Spool        |
| TFL12       | 12         | 0.085        | 2.16 | 0.081        | 2.06 | 0.091        | 2.31 | 0.008 ± 0.002 | 0.20 ± 0.05 | 500 ft. Spool        |
| TFL11       | 11         | 0.095        | 2.41 | 0.091        | 2.31 | 0.101        | 2.57 | 0.008 ± 0.002 | 0.20 ± 0.05 | 500 ft. Spool        |
| TFL10       | 10         | 0.106        | 2.69 | 0.102        | 2.59 | 0.112        | 2.84 | 0.008 ± 0.002 | 0.20 ± 0.05 | 500 ft. Spool        |
| TFL09       | 9          | 0.118        | 3.00 | 0.114        | 2.90 | 0.124        | 3.15 | 0.008 ± 0.002 | 0.20 ± 0.05 | 500 ft. Spool        |
| TFL08       | 8          | 0.133        | 3.38 | 0.129        | 3.28 | 0.141        | 3.58 | 0.008 ± 0.002 | 0.20 ± 0.05 | Random Length Coil   |
| TFL07       | 7          | 0.148        | 3.76 | 0.144        | 3.66 | 0.158        | 4.01 | 0.008 ± 0.002 | 0.20 ± 0.05 | Random Length Coil   |
| TFL06       | 6          | 0.166        | 4.22 | 0.162        | 4.11 | 0.178        | 4.52 | 0.010 ± 0.003 | 0.25 ± 0.08 | Random Length Coil   |
| TFL05       | 5          | 0.185        | 4.70 | 0.182        | 4.62 | 0.196        | 4.98 | 0.010 ± 0.003 | 0.25 ± 0.08 | Random Length Coil   |
| TFL04       | 4          | 0.208        | 5.28 | 0.204        | 5.18 | 0.224        | 5.69 | 0.010 ± 0.003 | 0.25 ± 0.08 | Random Length Coil   |
| TFL03       | 3          | 0.234        | 5.94 | 0.229        | 5.82 | 0.249        | 6.32 | 0.010 ± 0.003 | 0.25 ± 0.08 | Random Length Coil   |
| TFL02       | 2          | 0.263        | 6.68 | 0.258        | 6.55 | 0.278        | 7.06 | 0.010 ± 0.003 | 0.25 ± 0.08 | Random Length Coil   |
| TFL01       | 1          | 0.294        | 7.47 | 0.289        | 7.34 | 0.311        | 7.90 | 0.012 ± 0.003 | 0.31 ± 0.08 | Random Length Coil   |
| TFL00       | 0          | 0.330        | 8.38 | 0.325        | 8.25 | 0.347        | 8.81 | 0.012 ± 0.003 | 0.31 ± 0.08 | Random Length Coil   |

### Certifications

- ASTM D3295 Class 1
- AMS 3653E
- UL-224 150V 200°C
- FDA Compliant
- USP Class VI Compliant



# PTFE Beading

## Series Fractional: TFB



### Applications/Markets



- Pull Cord
- O-Ring Seals
- Spacers
- Woven Filter

### TFB PTFE Beading

| Part Number | Diameter |      | Tolerance |        | Standard Packaging |
|-------------|----------|------|-----------|--------|--------------------|
| #           | ⊙        |      |           |        |                    |
|             | inch     | mm   | inch      | mm     |                    |
| TFB015      | 0.015    | 0.38 | ± 0.002   | ± 0.05 | 1,000 ft. Spool    |
| TFB020      | 0.020    | 0.51 | ± 0.002   | ± 0.05 | 1,000 ft. Spool    |
| TFB025      | 0.025    | 0.64 | ± 0.002   | ± 0.05 | 1,000 ft. Spool    |
| TFB028      | 0.028    | 0.71 | ± 0.002   | ± 0.05 | 1,000 ft. Spool    |
| TFB031      | 0.031    | 0.79 | ± 0.002   | ± 0.05 | 1,000 ft. Spool    |
| TFB035      | 0.035    | 0.89 | ± 0.002   | ± 0.05 | 1,000 ft. Spool    |
| TFB039      | 0.039    | 0.99 | ± 0.002   | ± 0.05 | 1,000 ft. Spool    |
| TFB043      | 0.043    | 1.09 | ± 0.002   | ± 0.05 | 1,000 ft. Spool    |
| TFB047      | 0.047    | 1.19 | ± 0.002   | ± 0.05 | 1,000 ft. Spool    |
| TFB050      | 0.050    | 1.27 | ± 0.002   | ± 0.05 | 1,000 ft. Spool    |
| TFB055      | 0.055    | 1.40 | ± 0.003   | ± 0.08 | 1,000 ft. Spool    |
| TFB060      | 0.060    | 1.52 | ± 0.003   | ± 0.08 | 1,000 ft. Spool    |
| TFB062      | 0.062    | 1.57 | ± 0.003   | ± 0.08 | 1,000 ft. Spool    |
| TFB070      | 0.070    | 1.78 | ± 0.003   | ± 0.08 | 1,000 ft. Spool    |
| TFB072      | 0.072    | 1.83 | ± 0.003   | ± 0.08 | 1,000 ft. Spool    |
| TFB078      | 0.078    | 1.98 | ± 0.004   | ± 0.10 | 500 ft. Spool      |
| TFB080      | 0.080    | 2.03 | ± 0.004   | ± 0.10 | 500 ft. Spool      |
| TFB084      | 0.084    | 2.13 | ± 0.004   | ± 0.10 | 500 ft. Spool      |
| TFB090      | 0.090    | 2.29 | ± 0.004   | ± 0.10 | 500 ft. Spool      |
| TFB094      | 0.094    | 2.39 | ± 0.004   | ± 0.10 | 500 ft. Spool      |
| TFB100      | 0.100    | 2.54 | ± 0.004   | ± 0.10 | 500 ft. Spool      |
| TFB109      | 0.109    | 2.77 | ± 0.004   | ± 0.10 | 500 ft. Spool      |
| TFB115      | 0.115    | 2.92 | ± 0.004   | ± 0.10 | 500 ft. Spool      |
| TFB125      | 0.125    | 3.18 | ± 0.004   | ± 0.10 | Random Length      |
| TFB150      | 0.150    | 3.81 | ± 0.004   | ± 0.10 | Random Length      |
| TFB188      | 0.188    | 4.78 | ± 0.004   | ± 0.10 | Random Length      |

### Features

- Virgin Polytetrafluoroethylene resin
- Chemically inert
- Lowest coefficient of friction
- Superior dielectric strength
- Exceptional heat resistance
- Self extinguishing
- Non-wetting
- Excellent flexlife
- Laser markable

### Certifications

- ASTM D1710, Type 1, Grade 1, Class B
- ASTM D3295
- VW1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant

### Notes

- Working Temperature: -100°F to 500°F (-75°C to 260°C)
- Package quantities are not continuous

### Colors

- ○ Natural, Translucent
- Colors available as custom run, see color code table

| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

### Order Information

#### Example: TFB028-NT

TFB028-NT – PTFE Beading


TFB028-NT – Beading O.D. in inches (.028")

TFB028-NT – Natural

TFB028-NT – Bulk Tubing

# PTFE Spiral Cut Cable Wrap

Series: TSWTF

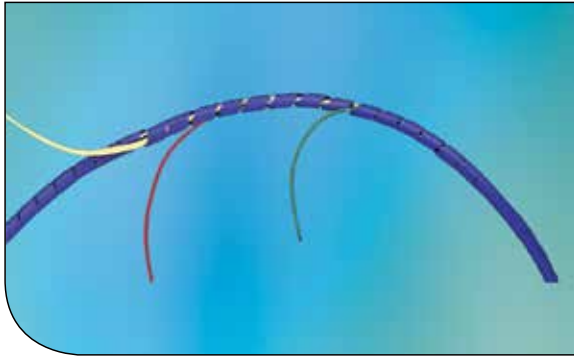

## Applications/Markets



- Cable harnessing
- Wiring closets
- Aerospace
- Automotive

## Order Information

**Example: TSWTF-3/8-5T**

**TSWTF-3/8-5T – Spiral Wrap**

**TSWTF-3/8-5T – Material (PTFE)**

**TSWTF-3/8-5T – O.D. in inches (.375")**

**TSWTF-3/8-5T – Green**

**TSWTF-3/8-5T – Bulk Tubing**

## Features

- Provides harnessing for wires and cable while allowing leads at various points
- Exceptional heat resistance
- Self extinguishing
- Flexible
- Superior dielectric strength

## Certifications

- A-A-59602
- AMS 3653E
- ASTM D3295
- VW1, UL-83 (natural)

## Notes




- Available in left- or right-hand cut. Please specify with proper suffix at end of part number (i.e. TSWTF-18-NT-R)
- Working Temperature: 500°F (260°C)
- 100 ft. is the minimum item quantity sold
- Stock packaging for sizes 1/8" to 1/2" is 100- and 500-ft. non-continuous spools and, for sizes greater than 1/2", 100-ft. non-continuous spools
- Custom packaging, sizes and colors are available upon request
- Spiral cut cable wrap is also quoted in FEP upon request
- Package quantities are not continuous
- Colors available as custom run, see color code table



## Colors

- ○ Natural, Translucent
- Colors available as custom run, see color code table

| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## PTFE Spiral Wrap

| Part Number   | O.D. "A"  |       | tolerance O.D. |       | Wall "B"  |       | tolerance Wall |       | Pitch "D" |       | tolerance Pitch |       | Max Bundle O.D. "C"   |        |
|---------------|---|-------|----------------|-------|---|-------|----------------|-------|-----------|-------|-----------------|-------|---|--------|
| #             |  |       |                |       |  |       |                |       |           |       |                 |       |  |        |
|               | inch  | mm    | inch           | mm    | inch  | mm    | inch           | mm    | inch      | mm    | inch            | mm    | inch  | mm     |
| TSWTF-1/8-NT  | 0.125   | 3.18  | ± 0.005        | 0.127 | 0.020   | 0.508 | ± 0.008        | 0.203 | 0.212     | 5.38  | ± 0.015         | 0.381 | 1/2   | 12.70  |
| TSWTF-3/16-NT | 0.188   | 4.78  | ± 0.005        | 0.127 | 0.030   | 0.762 | ± 0.008        | 0.203 | 0.312     | 7.92  | ± 0.015         | 0.381 | 1   | 25.40  |
| TSWTF-1/4-NT  | 0.250   | 6.35  | ± 0.005        | 0.127 | 0.030   | 0.762 | ± 0.008        | 0.203 | 0.375     | 9.52  | ± 0.015         | 0.381 | 2   | 50.80  |
| TSWTF-3/8-NT  | 0.375   | 9.52  | ± 0.005        | 0.127 | 0.030   | 0.762 | ± 0.008        | 0.203 | 0.437     | 11.10 | ± 0.015         | 0.381 | 2-1/2   | 63.50  |
| TSWTF-1/2-NT  | 0.500   | 12.70 | ± 0.005        | 0.127 | 0.030   | 0.762 | ± 0.008        | 0.203 | 0.562     | 14.27 | ± 0.015         | 0.381 | 3   | 76.20  |
| TSWTF-3/4-NT  | 0.750   | 19.05 | ± 0.005        | 0.127 | 0.040   | 1.02  | ± 0.008        | 0.203 | 0.875     | 22.22 | ± 0.015         | 0.381 | 4   | 101.60 |
| TSWTF-1.00-NT | 1   | 25.40 | ± 0.005        | 0.127 | 0.040   | 1.02  | ± 0.008        | 0.203 | 1         | 25.40 | ± 0.015         | 0.381 | 6   | 152.40 |

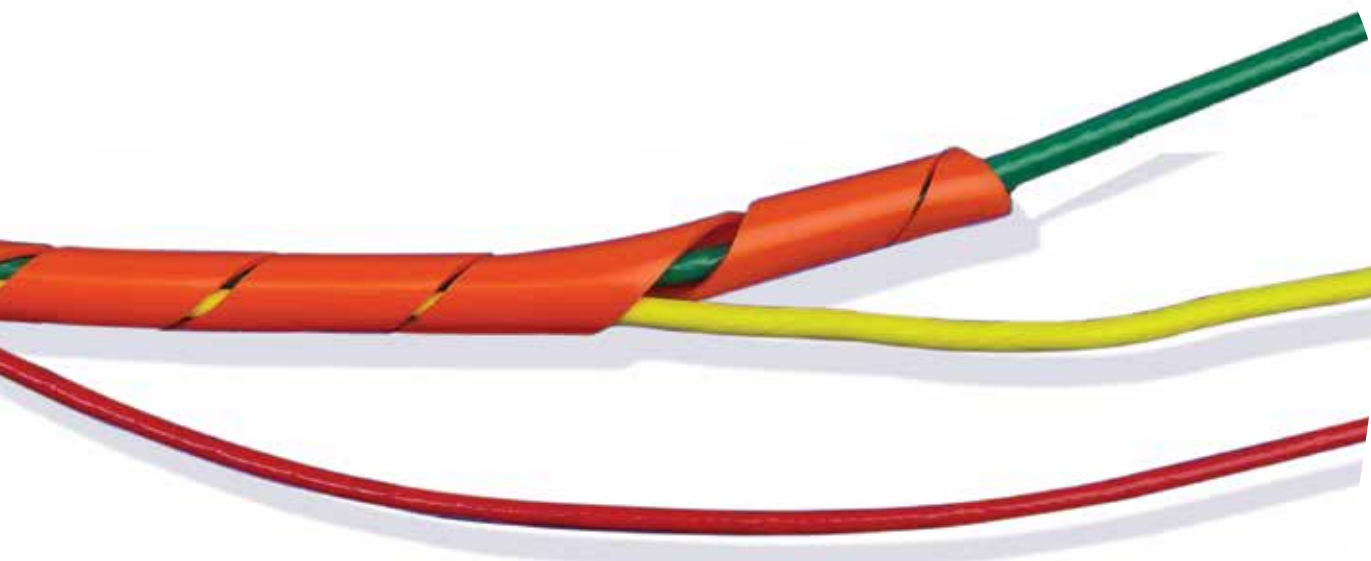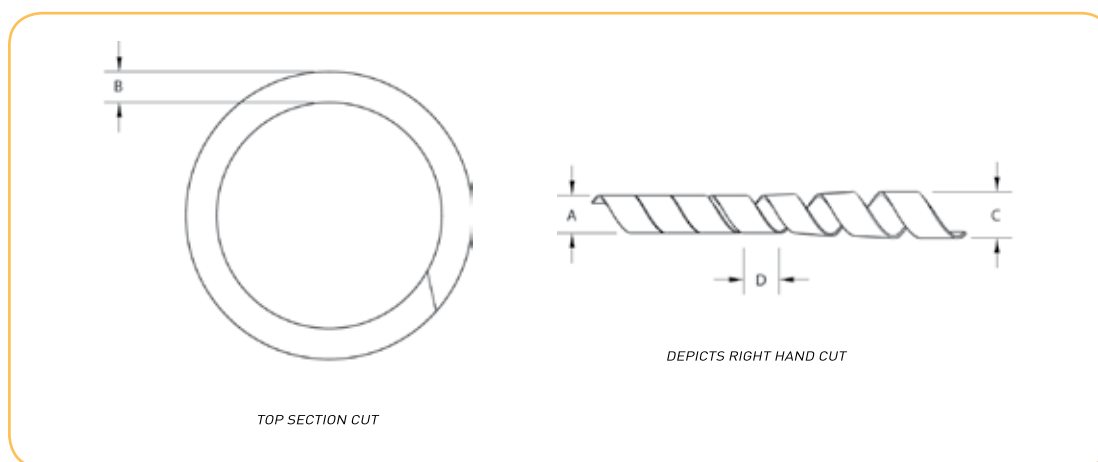

For detailed ordering information, please consult price list or contact Parker TexLoc®.

Parker Hannifin Corporation | Parflex® Division, TexLoc® | Fort Worth, Tx | [www.texloc.com](http://www.texloc.com)



C15

Intro

PFA  
Tubing  
A

FEP  
Tubing  
B

PTFE  
Tubing  
C

PVDF  
Tubing  
D

ETFE  
Tubing  
E

Technical  
Pages  
F

Index  
G

# PTFE Heat Shrinkable Tubing

Series 2:1 Fractional: HS2TFS, HS2TFT, HS2TFL, HS2TFI



## Applications/Markets



- Electrical Insulation
- Protective Cover
- Electronic Harness
- Laboratory

## Order Information

**Example: HS2TFI7/8-NT**

**HS2TFI7/8-NT – Heat Shrink**

**HS2TFI7/8-NT – Shrink Ratio (2:1)**

**HS2TFI7/8-NT – PTFE**

**HS2TFI7/8-NT – Wall Type (Industrial Wall)**

**HS2TFI7/8-NT – Heat Shrink Size in inches (7/8")**

**HS2TFI7/8-NT – Natural**

**HS2TFI7/8-NT – Bulk Tubing**

## Notes

- Working Temperature: -100°F to 500°F (-75°C to 260°C)
- Shrink Temperature: 662°F (350°C) for 10 minutes per AMS-DTL-23053/12A
- \*Dielectric Strength:  $\geq 1,400$  V/M, per ASTM D 149 short term test of 10 MIL thickness (Volts/MIL)
- PTFE Fractional Heat Shrink tubing is available in stock packaging of 4-ft. straight lengths
- Minimum quantities may apply
- Custom packaging, sizes, lengths and colors are quoted upon request

## Features

- Virgin Polytetrafluoroethylene resin
- 2:1 Shrink Ratio
- Chemically inert
- Lowest coefficient of friction
- Superior dielectric strength
- Exceptional heat resistance
- Self extinguishing
- Non-wetting

## Certifications

- ASTM D2902 Type I
- AMS 3653E
- VW1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant
- **Light Wall** (HS2TFL) – AMS-DTL-23053/12A Class 4
- **Thin Wall** (HS2TFT) – AMS-DTL-23053/12A Class 3, AMS 3585
- **Standard Wall** (HS2TFS) – AMS-DTL-23053/12A Class 2, AMS 3586
- **Heavy Wall** (HS2TFH) – AMS-DTL-23053/12A Class 1 (Custom Order only)

## Colors

- ○ Natural, Opaque to translucent
- Colors available as custom run, see color code table

When ordering coiled tubing in colors, the color code is always followed by TC; when ordering cut lengths, the color code is followed by CC

ie HS2TFI7/8-2TC      ie HS2TFI7/8-0CC48.000


| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## HS2TFS & HS2TFT PTFE Fractional Heat Shrink Tubing (2:1) SW & TW

| Order Size | Minimum Expanded I.D. |      | Maximum Recovered I.D. |      | Standard Wall |             |                        |             | Thin Wall     |             |                        |             |
|------------|-----------------------|------|------------------------|------|---------------|-------------|------------------------|-------------|---------------|-------------|------------------------|-------------|
|            |                       |      |                        |      | Mil Spec*     | Part Number | Nominal Recovered Wall |             | Mil Spec*     | Part Number | Nominal Recovered Wall |             |
|            | inch                  | mm   | inch                   | mm   |               |             | inch                   | mm          |               |             | inch                   | mm          |
| 1/8        | 0.215                 | 05.5 | 0.130                  | 3.3  | 23053/12A-215 | HS2TFS1/8   | 0.020 ± 0.004          | 0.51 ± 0.10 | 23053/12A-319 | HS2TFT1/8   | 0.015 ± 0.003          | 0.38 ± 0.08 |
| 1/4        | 0.410                 | 10.4 | 0.260                  | 6.6  | 23053/12A-222 | HS2TFS1/4   | 0.020 ± 0.004          | 0.51 ± 0.10 | 23053/12A-326 | HS2TFT1/4   | 0.015 ± 0.004          | 0.38 ± 0.10 |
| 5/16       | 0.470                 | 11.9 | 0.329                  | 8.4  | 23053/12A-225 | HS2TFS5/16  | 0.020 ± 0.004          | 0.51 ± 0.10 | 23053/12A-329 | HS2TFT5/16  | 0.015 ± 0.004          | 0.38 ± 0.10 |
| 3/8        | 0.560                 | 14.2 | 0.399                  | 10.1 | 23053/12A-228 | HS2TFS3/8   | 0.025 ± 0.006          | 0.64 ± 0.15 | -             | HS2TF 3/8   | 0.015 ± 0.004          | 0.38 ± 0.10 |
| 7/16       | 0.655                 | 16.6 | 0.462                  | 11.7 | 23053/12A-229 | HS2TFS7/16  | 0.025 ± 0.006          | 0.64 ± 0.15 | -             | HS2TFT7/16  | 0.018 ± 0.004          | 0.46 ± 0.10 |
| 1/2        | 0.750                 | 19.1 | 0.524                  | 13.3 | 23053/12A-230 | HS2TFS1/2   | 0.025 ± 0.006          | 0.64 ± 0.15 | -             | HS2TFT1/2   | 0.018 ± 0.004          | 0.46 ± 0.10 |
| 5/8        | 0.930                 | 23.6 | 0.655                  | 16.6 | 23053/12A-231 | HS2TFS5/8   | 0.030 ± 0.006          | 0.76 ± 0.15 | -             | HS2TF 5/8   | 0.020 ± 0.004          | 0.51 ± 0.10 |
| 3/4        | 1.125                 | 28.6 | 0.786                  | 20.0 | 23053/12A-232 | HS2TFS3/4   | 0.035 ± 0.008          | 0.89 ± 0.20 | -             | HS2TFT3/4   | 0.025 ± 0.004          | 0.64 ± 0.10 |
| 7/8        | 1.310                 | 33.2 | 0.911                  | 23.1 | 23053/12A-233 | HS2TFS7/8   | 0.035 ± 0.008          | 0.89 ± 0.20 | -             | HS2TFT7/8   | 0.025 ± 0.004          | 0.64 ± 0.10 |
| 1          | 1.500                 | 38.1 | 1.036                  | 26.3 | 23053/12A-234 | HS2TFS1.00  | 0.035 ± 0.008          | 0.89 ± 0.20 | -             | HS2TFT1.00  | 0.025 ± 0.004          | 0.64 ± 0.10 |

## HS2TFL PTFE Fractional Heat Shrink Tubing (2:1) LW

| Order Size | Minimum Expanded I.D. |      | Maximum Recovered I.D. |     | Light Wall    |             |                        |             |
|------------|-----------------------|------|------------------------|-----|---------------|-------------|------------------------|-------------|
|            |                       |      |                        |     | Mil Spec*     | Part Number | Nominal Recovered Wall |             |
|            | inch                  | mm   | inch                   | mm  |               |             | inch                   | mm          |
| 1/8        | 0.215                 | 5.5  | 0.130                  | 3.3 | 23053/12A-415 | HS2TFL1/8   | 0.008 ± 0.002          | 0.20 ± 0.05 |
| 1/4        | 0.410                 | 10.4 | 0.260                  | 6.6 | 23053/12A-422 | HS2TFL1/4   | 0.010 ± 0.003          | 0.25 ± 0.08 |
| 5/16       | 0.470                 | 11.9 | 0.329                  | 8.4 | 23053/12A-425 | HS2TFL5/16  | 0.012 ± 0.003          | 0.31 ± 0.08 |

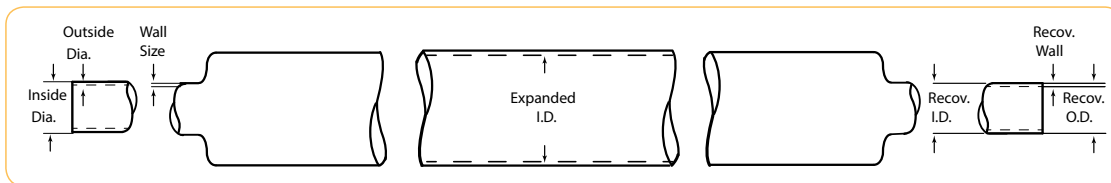

## HS2TFI PTFE Fractional Heat Shrink Tubing (2:1), Ind. Heavy Wall

| Part Number | Order Size | Mil Spec*     | Minimum Expanded I.D. |      | Maximum Recovered I.D. |      | Nominal Recovered Wall |             |
|-------------|------------|---------------|-----------------------|------|------------------------|------|------------------------|-------------|
|             |            |               | inch                  | mm   | inch                   | mm   | inch                   | mm          |
| HS2TFI1/8   | 1/8        | 23053/12A-101 | 0.166                 | 4.2  | 0.130                  | 3.3  | 0.030 ± 0.005          | 0.76 ± 0.13 |
| HS2TFI3/16  | 3/16       | 23053/12A-102 | 0.250                 | 6.4  | 0.193                  | 4.9  | 0.030 ± 0.005          | 0.76 ± 0.13 |
| HS2TFI1/4   | 1/4        | 23053/12A-103 | 0.333                 | 8.4  | 0.257                  | 6.5  | 0.030 ± 0.005          | 0.76 ± 0.13 |
| HS2TFI5/16  | 5/16       | 23053/12A-104 | 0.415                 | 10.5 | 0.320                  | 8.1  | 0.030 ± 0.005          | 0.76 ± 0.13 |
| HS2TFI3/8   | 3/8        | 23053/12A-105 | 0.498                 | 12.6 | 0.383                  | 9.7  | 0.030 ± 0.005          | 0.76 ± 0.13 |
| HS2TFI7/16  | 7/16       | 23053/12A-106 | 0.580                 | 14.7 | 0.448                  | 11.4 | 0.030 ± 0.006          | 0.76 ± 0.15 |
| HS2TFI1/2   | 1/2        | 23053/12A-107 | 0.666                 | 16.9 | 0.510                  | 13.0 | 0.030 ± 0.006          | 0.76 ± 0.15 |
| HS2TFI9/16  | 9/16       | 23053/12A-108 | 0.748                 | 19.0 | 0.572                  | 14.5 | 0.030 ± 0.006          | 0.76 ± 0.15 |
| HS2TFI5/8   | 5/8        | 23053/12A-109 | 0.830                 | 21.1 | 0.637                  | 16.2 | 0.030 ± 0.006          | 0.76 ± 0.15 |
| HS2TFI11/16 | 11/16      | 23053/12A-110 | 0.915                 | 23.2 | 0.700                  | 17.8 | 0.032 ± 0.006          | 0.81 ± 0.15 |
| HS2TFI3/4   | 3/4        | 23053/12A-111 | 1.000                 | 25.4 | 0.764                  | 19.4 | 0.040 ± 0.007          | 1.02 ± 0.18 |
| HS2TFI7/8   | 7/8        | 23053/12A-112 | 1.170                 | 29.7 | 0.891                  | 22.6 | 0.045 ± 0.007          | 1.14 ± 0.18 |
| HS2TFI1.00  | 1          | 23053/12A-113 | 1.330                 | 33.8 | 1.020                  | 25.9 | 0.050 ± 0.008          | 1.27 ± 0.20 |

For detailed ordering information, please consult price list or contact Parker TexLoc®.

# PTFE Heat Shrinkable Tubing

Series 2:1 AWG: HS2TFS, HS2TFT, HS2TFL



## Applications/Markets



- Electrical Insulation
- Protective Cover
- Electronic Harness
- Laboratory

## Order Information

**Example: HS2TFS15-4TC-500**

**HS2TFS15-4TC-500 – Heat Shrink**

**HS2TFS15-4TC-500 – Shrink Ratio (2:1)**

**HS2TFS15-4TC-500 – PTFE**

**HS2TFS15-4TC-500 – Wall Type (Standard Wall)**

**HS2TFS15-4TC-500 – Heat Shrink Size in AWG (AWG15)**

**HS2TFS15-4TC-500 – Yellow**

**HS2TFS15-4TC-500 – Bulk Tubing**

**HS2TFS15-4TC-500 – Solid Color**

**HS2TFS15-4TC-500 – Package Quantity in feet (500')**

## Notes

- Working Temperature: -100°F to 500°F (-75°C to 260°C)
- Shrink Temperature: 662°F (350°C) for 10 minutes per AMS-DTL-23053/12A
- \*Dielectric Strength:  $\geq 1,400$  V/M, per ASTM D 149 short term test of 10 MIL thickness (Volts/MIL)
- PTFE AWG Heat Shrink tubing is available in stock packaging of 4-ft. straight lengths
- Minimum quantities may apply
- Custom packaging, sizes, lengths and colors are quoted upon request

## Features

- Virgin Polytetrafluoroethylene resin
- 2:1 Shrink Ratio
- Chemically inert
- Lowest coefficient of friction
- Superior dielectric strength
- Exceptional heat resistance
- Self extinguishing
- Non-wetting

## Certifications

- ASTM D2902 Type I
- AMS 3653E
- VW1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant
- **Light Wall** (HS2TFL) – AMS-DTL-23053/12A Class 4
- **Thin Wall** (HS2TFT) – AMS-DTL-23053/12A Class 3, AMS 3585
- **Standard Wall** (HS2TFS) – AMS-DTL-23053/12A Class 2, AMS 3586
- **Heavy Wall** (HS2TFH) – AMS-DTL-23053/12A Class 1 (Custom Order only)

## Colors

- ○ Natural, Opaque to translucent
- Colors available as custom run, see color code table

When ordering coiled tubing in colors, the color code is always followed by TC; when ordering cut lengths, the color code is followed by CC

ie HS2TFS15-2TC

ie HS2TFS15-0CC48.000


| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

### HS2TFS Standard Wall (2:1)

| Part Number | Order Size | Mil Spec*     | Minimum Expanded I.D. |      | Maximum Recovered I.D. |      | Nominal Recovered Wall |             |
|-------------|------------|---------------|-----------------------|------|------------------------|------|------------------------|-------------|
|             |            |               | inch                  | mm   | inch                   | mm   | inch                   | mm          |
| HS2TFS24    | 24         | 23053/12A-201 | 0.050                 | 1.27 | 0.027                  | 0.69 | 0.012 ± 0.002          | 0.31 ± 0.05 |
| HS2TFS22    | 22         | 23053/12A-202 | 0.055                 | 1.40 | 0.032                  | 0.81 | 0.012 ± 0.002          | 0.31 ± 0.05 |
| HS2TFS20    | 20         | 23053/12A-203 | 0.060                 | 1.52 | 0.039                  | 0.99 | 0.016 ± 0.003          | 0.41 ± 0.08 |
| HS2TFS19    | 19         | 23053/12A-204 | 0.065                 | 1.65 | 0.043                  | 1.09 | 0.016 ± 0.003          | 0.41 ± 0.08 |
| HS2TFS18    | 18         | 23053/12A-205 | 0.076                 | 1.93 | 0.049                  | 1.25 | 0.016 ± 0.003          | 0.41 ± 0.08 |
| HS2TFS17    | 17         | 23053/12A-206 | 0.085                 | 2.16 | 0.054                  | 1.37 | 0.016 ± 0.003          | 0.41 ± 0.08 |
| HS2TFS16    | 16         | -             | 0.093                 | 2.36 | 0.061                  | 1.55 | 0.016 ± 0.003          | 0.41 ± 0.08 |
| HS2TFS15    | 15         | 23053/12A-207 | 0.110                 | 2.79 | 0.067                  | 1.70 | 0.016 ± 0.003          | 0.41 ± 0.08 |
| HS2TFS14    | 14         | 23053/12A-208 | 0.120                 | 3.05 | 0.072                  | 1.83 | 0.016 ± 0.003          | 0.41 ± 0.08 |
| HS2TFS13    | 13         | 23053/12A-210 | 0.140                 | 3.56 | 0.080                  | 2.03 | 0.016 ± 0.003          | 0.41 ± 0.08 |
| HS2TFS12    | 12         | 23053/12A-211 | 0.150                 | 3.81 | 0.089                  | 2.26 | 0.016 ± 0.003          | 0.41 ± 0.08 |
| HS2TFS11    | 11         | 23053/12A-212 | 0.170                 | 4.32 | 0.101                  | 2.57 | 0.016 ± 0.003          | 0.41 ± 0.08 |
| HS2TFS10    | 10         | 23053/12A-213 | 0.191                 | 4.85 | 0.112                  | 2.84 | 0.016 ± 0.003          | 0.41 ± 0.08 |
| HS2TFS09    | 9          | 23053/12A-214 | 0.205                 | 5.21 | 0.124                  | 3.15 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS2TFS08    | 8          | 23053/12A-216 | 0.240                 | 6.10 | 0.141                  | 3.58 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS2TFS07    | 7          | 23053/12A-217 | 0.270                 | 6.86 | 0.158                  | 4.01 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS2TFS06    | 6          | 23053/12A-218 | 0.302                 | 7.67 | 0.178                  | 4.52 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS2TFS05    | 5          | 23053/12A-219 | 0.320                 | 8.13 | 0.198                  | 5.03 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS2TFS04    | 4          | 23053/12A-220 | 0.370                 | 9.40 | 0.224                  | 5.69 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS2TFS03    | 3          | 23053/12A-221 | 0.390                 | 9.91 | 0.249                  | 6.32 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS2TFS02    | 2          | 23053/12A-223 | 0.430                 | 10.9 | 0.278                  | 7.06 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS2TFS01    | 1          | 23053/12A-224 | 0.450                 | 11.4 | 0.311                  | 7.90 | 0.020 ± 0.004          | 0.51 ± 0.10 |
| HS2TFS00    | 0          | 23053/12A-226 | 0.470                 | 11.9 | 0.347                  | 8.81 | 0.020 ± 0.004          | 0.51 ± 0.10 |

## Certifications

- AMS-DTL-23053/12A, Class 3
- AMS 3585
- ASTM D2902 Type I
- FDA Compliant
- USP Class VI Compliant

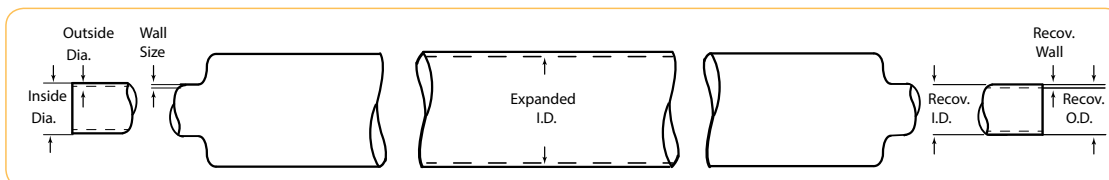

# PTFE Heat Shrinkable Tubing

## Series 2:1 AWG: HS2TFS, HS2TFT, HS2TFL (cont.)

### HS2TFT Thin Wall (2:1)

| Part Number | Order Size<br>AWG | Mil Spec*     | Minimum Expanded I.D. |      | Maximum Recovered I.D. |      | Nominal Recovered Wall |             |
|-------------|-------------------|---------------|-----------------------|------|------------------------|------|------------------------|-------------|
|             |                   |               | inch                  | mm   | inch                   | mm   | inch                   | mm          |
| HS2TFT30    | 30                | 23053/12A-301 | 0.034                 | 0.86 | 0.015                  | 0.38 | 0.009 ± 0.002          | 0.23 ± 0.05 |
| HS2TFT28    | 28                | 23053/12A-302 | 0.038                 | 0.97 | 0.018                  | 0.46 | 0.009 ± 0.002          | 0.23 ± 0.05 |
| HS2TFT26    | 26                | 23053/12A-303 | 0.046                 | 1.16 | 0.022                  | 0.56 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS2TFT24    | 24                | 23053/12A-304 | 0.050                 | 1.27 | 0.027                  | 0.69 | 0.010 ± 0.002          | 0.25 ± 0.08 |
| HS2TFT22    | 22                | 23053/12A-305 | 0.055                 | 1.40 | 0.032                  | 0.81 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT20    | 20                | 23053/12A-306 | 0.060                 | 1.52 | 0.039                  | 0.99 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT19    | 19                | 23053/12A-307 | 0.065                 | 1.65 | 0.043                  | 1.09 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT18    | 18                | 23053/12A-308 | 0.076                 | 1.93 | 0.049                  | 1.25 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT17    | 17                | 23053/12A-309 | 0.085                 | 2.16 | 0.054                  | 1.37 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT16    | 16                | 23053/12A-310 | 0.093                 | 2.36 | 0.061                  | 1.55 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT15    | 15                | 23053/12A-311 | 0.110                 | 2.79 | 0.067                  | 1.70 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT14    | 14                | 23053/12A-312 | 0.120                 | 3.05 | 0.072                  | 1.83 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT13    | 13                | 23053/12A-313 | 0.140                 | 3.56 | 0.080                  | 2.03 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT12    | 12                | 23053/12A-314 | 0.150                 | 3.81 | 0.089                  | 2.26 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT11    | 11                | 23053/12A-316 | 0.170                 | 4.32 | 0.101                  | 2.57 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT10    | 10                | 23053/12A-317 | 0.191                 | 4.85 | 0.112                  | 2.84 | 0.012 ± 0.003          | 0.31 ± 0.08 |
| HS2TFT09    | 9                 | 23053/12A-318 | 0.205                 | 5.21 | 0.124                  | 3.15 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS2TFT08    | 8                 | 23053/12A-320 | 0.240                 | 6.10 | 0.141                  | 3.58 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS2TFT07    | 7                 | 23053/12A-321 | 0.270                 | 6.86 | 0.158                  | 4.01 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS2TFT06    | 6                 | 23053/12A-322 | 0.302                 | 7.67 | 0.178                  | 4.52 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS2TFT05    | 5                 | 23053/12A-323 | 0.320                 | 8.13 | 0.198                  | 5.03 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS2TFT04    | 4                 | 23053/12A-324 | 0.370                 | 9.40 | 0.224                  | 5.69 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS2TFT03    | 3                 | 23053/12A-325 | 0.390                 | 9.91 | 0.249                  | 6.32 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS2TFT02    | 2                 | 23053/12A-327 | 0.430                 | 10.9 | 0.278                  | 7.06 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS2TFT01    | 1                 | 23053/12A-328 | 0.450                 | 11.4 | 0.311                  | 7.90 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS2TFT00    | 0                 | 23053/12A-330 | 0.470                 | 11.9 | 0.347                  | 8.81 | 0.015 ± 0.004          | 0.38 ± 0.10 |

\*Dielectric Strength: ≥ 1,400 V/M, per ASTM D 149 short term test of 10 MIL thickness (Volts/MIL)

### Certifications

- AMS-DTL-23053/12A, Class 3
- AMS 3585
- ASTM D2902 Type I
- FDA Compliant
- USP Class VI Compliant

## HS2TFL Light Wall (2:1)

| Part Number | Order Size<br>AWG | Mil Spec*     | Minimum Expanded I.D. |      | Maximum Recovered I.D. |      | Nominal Recovered Wall |             |
|-------------|-------------------|---------------|-----------------------|------|------------------------|------|------------------------|-------------|
|             |                   |               | inch                  | mm   | inch                   | mm   | inch                   | mm          |
| HS2TFL24    | 24                | 23053/12A-404 | 0.050                 | 1.27 | 0.025                  | 0.64 | 0.006 ± 0.002          | 0.15 ± 0.05 |
| HS2TFL22    | 22                | 23053/12A-405 | 0.055                 | 1.40 | 0.031                  | 0.79 | 0.006 ± 0.002          | 0.15 ± 0.05 |
| HS2TFL20    | 20                | 23053/12A-406 | 0.060                 | 1.52 | 0.038                  | 0.97 | 0.006 ± 0.002          | 0.15 ± 0.05 |
| HS2TFL19    | 19                | 23053/12A-407 | 0.065                 | 1.65 | 0.043                  | 1.09 | 0.006 ± 0.002          | 0.15 ± 0.05 |
| HS2TFL18    | 18                | 23053/12A-408 | 0.076                 | 1.93 | 0.046                  | 1.17 | 0.006 ± 0.002          | 0.15 ± 0.05 |
| HS2TFL17    | 17                | 23053/12A-409 | 0.085                 | 2.16 | 0.054                  | 1.37 | 0.006 ± 0.002          | 0.15 ± 0.05 |
| HS2TFL16    | 16                | 23053/12A-410 | 0.093                 | 2.36 | 0.057                  | 1.45 | 0.006 ± 0.002          | 0.15 ± 0.05 |
| HS2TFL15    | 15                | 23053/12A-411 | 0.110                 | 2.79 | 0.063                  | 1.60 | 0.006 ± 0.002          | 0.15 ± 0.05 |
| HS2TFL14    | 14                | 23053/12A-412 | 0.120                 | 3.05 | 0.072                  | 1.83 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS2TFL13    | 13                | 23053/12A-413 | 0.140                 | 3.56 | 0.080                  | 2.03 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS2TFL12    | 12                | 23053/12A-414 | 0.150                 | 3.81 | 0.089                  | 2.26 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS2TFL11    | 11                | 23053/12A-416 | 0.170                 | 4.32 | 0.099                  | 2.51 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS2TFL10    | 10                | 23053/12A-417 | 0.191                 | 4.85 | 0.110                  | 2.79 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS2TFL09    | 9                 | 23053/12A-418 | 0.205                 | 5.21 | 0.122                  | 3.10 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS2TFL08    | 8                 | 23053/12A-420 | 0.240                 | 6.10 | 0.139                  | 3.53 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS2TFL07    | 7                 | 23053/12A-421 | 0.270                 | 6.86 | 0.154                  | 3.91 | 0.008 ± 0.002          | 0.20 ± 0.05 |
| HS2TFL06    | 6                 | 23053/12A-422 | 0.302                 | 7.67 | 0.172                  | 4.37 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS2TFL05    | 5                 | 23053/12A-423 | 0.320                 | 8.13 | 0.192                  | 4.88 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS2TFL04    | 4                 | 23053/12A-424 | 0.370                 | 9.40 | 0.214                  | 5.44 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS2TFL03    | 3                 | 23053/12A-425 | 0.390                 | 9.91 | 0.241                  | 6.12 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS2TFL02    | 2                 | 23053/12A-427 | 0.430                 | 10.9 | 0.270                  | 6.88 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS2TFL01    | 1                 | 23053/12A-428 | 0.450                 | 11.4 | 0.301                  | 7.65 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS2TFL00    | 0                 | 23053/12A-430 | 0.470                 | 11.9 | 0.347                  | 8.81 | 0.012 ± 0.003          | 0.31 ± 0.08 |

\*Dielectric Strength: ≥ 1,400 V/M, per ASTM D 149 short term test of 10 MIL thickness (Volts/MIL)

## Certifications

- AMS-DTL-23053/12A, Class 4
- ASTM D2902 Type I
- FDA Compliant
- USP Class VI Compliant

# PTFE Heat Shrinkable Tubing

## Series 4:1 HS4TFI



### Features

- Virgin Polytetrafluoroethylene resin
- 4:1 Shrink Ratio
- Chemically inert
- Lowest coefficient of friction
- Superior dielectric strength
- Exceptional heat resistance
- Self extinguishing
- Non-wetting

### Certifications

- AMS-DTL-23053/12A, Class 5
- ASTM D2902 Type I
- AMS 3584A
- VW1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant

### Applications/Markets



- Electrical Insulation
- Protective Cover
- Rollers
- Bulb Protection

### Order Information

**Example: HS4TFI5/8-NT**

**HS4TFI5/8-NT – Heat Shrink**

**HS4TFI5/8-NT – Shrink Ratio (4:1)**

**HS4TFI5/8-NT – PTFE**

**HS4TFI5/8-NT – Wall Type (Industrial Wall)**

**HS4TFI5/8-NT – Heat Shrink Size in inches (5/8")**

**HS4TFI5/8-NT – Natural**

**HS4TFI5/8-NT – Bulk Tubing**

### Notes

- Working Temperature: 500°F (260°C)
- Shrink Temperature: 662°F (350°C) for 10 minutes per AMS-DTL-23053/12A
- For full recovery, expanded diameter should be 50% larger than the diameter of the object to be recovered over
- \*Dielectric Strength:  $\geq 1,400$  V/M, per ASTM D 149 short term test of 10 MIL thickness (Volts/MIL)
- PTFE Fractional Heat Shrink tubing is available in stock packaging of 4-ft. straight lengths
- Minimum quantities may apply
- Custom packaging, sizes, lengths and colors are quoted upon request

### Colors

- ○ Natural, Opaque to translucent
- Colors available as custom run, see color code table


When ordering coiled tubing in colors, the color code is always followed by TC; when ordering cut lengths, the color code is followed by CC

ie HS4TFI5/8-2TC    ie HS4TFI5/8-0CC48.0000

| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |


### HS4TFI PTFE Industrial Wall Heat Shrink Tubing (4:1)

| Part Number | Order Size<br>inch | Mil Spec*     | Minimum Expanded I.D. |      | Maximum Recovered I.D. |      | Nominal Recovered Wall |             |
|-------------|--------------------|---------------|-----------------------|------|------------------------|------|------------------------|-------------|
|             |                    |               | inch                  | mm   | inch                   | mm   | inch                   | mm          |
| HS4TFI5/64  | 5/64               | 23053/12A-501 | 0.078                 | 1.98 | 0.025                  | 0.64 | 0.009 ± 0.002          | 0.23 ± 0.05 |
| HS4TFI1/8   | 1/8                | 23053/12A-502 | 0.125                 | 3.18 | 0.037                  | 0.94 | 0.012 ± 0.002          | 0.31 ± 0.05 |
| HS4TFI3/16  | 3/16               | 23053/12A-503 | 0.187                 | 4.75 | 0.050                  | 1.27 | 0.012 ± 0.002          | 0.31 ± 0.05 |
| HS4TFI1/4   | 1/4                | 23053/12A-504 | 0.250                 | 6.35 | 0.063                  | 1.60 | 0.012 ± 0.002          | 0.31 ± 0.05 |
| HS4TFI5/16  | 5/16               | 23053/12A-505 | 0.312                 | 7.92 | 0.078                  | 1.98 | 0.012 ± 0.002          | 0.31 ± 0.05 |
| HS4TFI3/8   | 3/8                | 23053/12A-506 | 0.375                 | 9.52 | 0.096                  | 2.44 | 0.012 ± 0.002          | 0.31 ± 0.05 |
| HS4TFI7/16  | 7/16               | 23053/12A-507 | 0.438                 | 11.1 | 0.112                  | 2.84 | 0.012 ± 0.002          | 0.31 ± 0.05 |
| HS4TFI1/2   | 1/2                | 23053/12A-508 | 0.500                 | 12.7 | 0.144                  | 3.66 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS4TFI5/8   | 5/8                | 23053/12A-510 | 0.625                 | 15.9 | 0.178                  | 4.52 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS4TFI3/4   | 3/4                | 23053/12A-512 | 0.750                 | 19.1 | 0.224                  | 5.70 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS4TFI7/8   | 7/8                | 23053/12A-513 | 0.875                 | 22.2 | 0.244                  | 6.20 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS4TFI1.00  | 1                  | 23053/12A-514 | 1.000                 | 25.4 | 0.278                  | 7.06 | 0.015 ± 0.004          | 0.38 ± 0.10 |
| HS4TFI1.25  | 1-1/4              | 23053/12A-515 | 1.250                 | 31.8 | 0.347                  | 8.81 | 0.015 ± 0.004          | 0.38 ± 0.10 |

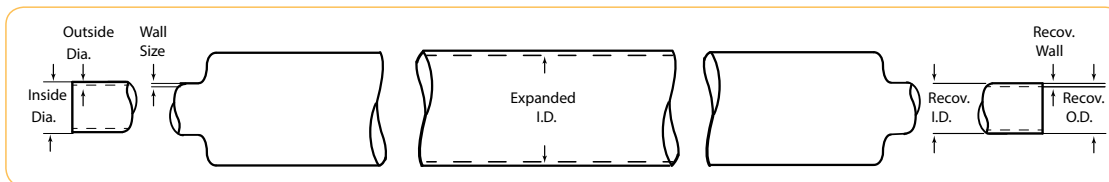

# PTFE Convoluted

## Series Convo-Tex®

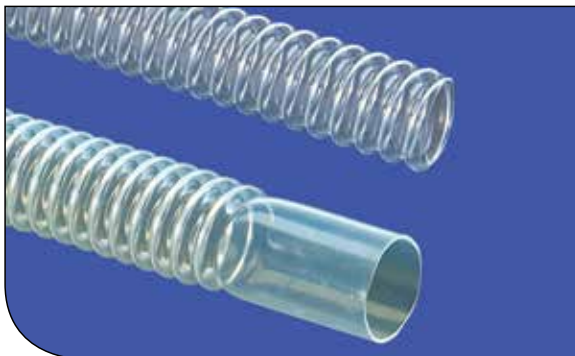

### Features

- Chemically inert
- Low coefficient of friction
- Very flexible
- Self extinguishing
- Non-wetting

### Certifications

- AMS 3653E
- VW1, UL-83 (natural)
- FDA Compliant
- USP Class VI Compliant

### Applications/Markets



- Fluid Transport
- Wire Harness
- Protection/Cable Core
- Robotics

### Order Information

**Example: CV01-1/8-NT**

**CV01-1/8-NT – Convoluted**

**CV01-1/8-NT – PTFE**

**CV01-1/8-NT – Size to Order (1/8")**

**CV01-1/8-NT – Color (N=Natural)**

CV01-1/8-NT- "T" is bulk (for cuffed tubing, remove "T" and add length, ie. CV01-1/8-N1200 = 1" Convo, natural, cut 12" long)

### Notes

- Working Temperature: -100°F to 500°F (-75°C to 260°C)
- Standard cuffs for Convo-Tex are sized on the Inside Diameter
- Wire wrap reinforcement can be added for increased pressure applications or when a tighter bend radius is needed
- Minimum quantities may apply
- Custom packaging, sizes, lengths and colors are quoted upon request

### Colors

- ○ Natural, Opaque to Translucent
- Colors available as custom run, see color code table


| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## PTFE Convo-Tex® Convoluteds

(Standard tubing is natural)

| Part Number  | Size To Order | Standard Cuff I.D. "A" |       | Standard Cuff Length "B" |      | Wall Thickness "C" |      | Min. Inside Diameter "D" |       | Max. Inside Diameter "D" |       | Max. Outside Diameter "E" |       | **Min. Bend Radius |       |
|--------------|---------------|------------------------|-------|--------------------------|------|--------------------|------|--------------------------|-------|--------------------------|-------|---------------------------|-------|--------------------|-------|
|              |               | inch                   | mm    | inch                     | mm   | inch               | mm   | inch                     | mm    | inch                     | mm    | inch                      | mm    | inch               | mm    |
| CV01-1/8-NT  | CONV-2        | 1/8                    | 3.18  | 3/4                      | 19.1 | 0.010              | 0.25 | 0.130                    | 3.3   | 0.140                    | 3.6   | 0.235                     | 5.9   | 3/8                | 9.5   |
| CV01-1/4-NT  | CONV-4        | 1/4                    | 6.35  | 3/4                      | 19.1 | 0.015              | 0.38 | 0.181                    | 4.6   | 0.188                    | 4.8   | 0.320                     | 8.1   | 1/2                | 12.7  |
| CV01-5/16-NT | CONV-5        | 5/16                   | 7.94  | 1                        | 25.4 | 0.020              | 0.51 | 0.273                    | 6.9   | 0.281                    | 7.1   | 0.414                     | 10.5  | 3/4                | 19.1  |
| CV01-3/8-NT  | CONV-6        | 3/8                    | 9.53  | 1                        | 25.4 | 0.020              | 0.51 | 0.303                    | 7.7   | 0.312                    | 7.9   | 0.450                     | 11.4  | 1-3/4              | 44.4  |
| CV01-1/2-NT  | CONV-8        | 1/2                    | 12.7  | 1                        | 25.4 | 0.020              | 0.51 | 0.425                    | 10.8  | 0.437                    | 11.1  | 0.590                     | 15.0  | 1-1/4              | 31.2  |
| CV01-5/8-NT  | CONV-10       | 5/8                    | 15.9  | 1-1/4                    | 31.8 | 0.025              | 0.64 | 0.485                    | 12.3  | 0.500                    | 12.7  | 0.660                     | 16.8  | 1-1/2              | 38.1  |
| CV01-3/4-NT  | CONV-12       | 3/4                    | 19.1  | 1-1/2                    | 38.1 | 0.023              | 0.58 | 0.608                    | 15.4  | 0.625                    | 15.9  | 0.780                     | 19.8  | 1-3/4              | 44.4  |
| CV01-1.00-NT | CONV-16       | 1                      | 25.4  | 2                        | 50.8 | 0.030              | 0.76 | 0.849                    | 21.6  | 0.875                    | 22.2  | 1.100                     | 27.9  | 2-1/4              | 57.2  |
| CV01-1.25-NT | CONV-20       | 1-1/4                  | 31.8  | 2-1/2                    | 63.5 | 0.035              | 0.89 | 1.150                    | 29.2  | 1.190                    | 30.2  | 1.560                     | 39.6  | 2-3/4              | 69.9  |
| CV01-1.50-NT | CONV-24       | 1-1/2                  | 38.1  | 2-1/2                    | 63.5 | 0.040              | 1.02 | 1.410                    | 35.8  | 1.490                    | 37.8  | 1.910                     | 48.5  | 3                  | 76.2  |
| CV01-2.00-NT | CONV-32       | 2                      | 50.8  | 2-1/2                    | 63.5 | 0.043              | 1.09 | 1.955                    | 49.7  | 1.985                    | 50.4  | 2.450                     | 62.2  | 4-1/4              | 107.9 |
| CV01-2.50-NT | CONV-40       | 2-1/2                  | 63.5  | 2-1/2                    | 63.5 | 0.062              | 1.57 | 2.460                    | 62.5  | 2.540                    | 64.5  | 3.210                     | 81.6  | 5                  | 127   |
| CV01-3.00-NT | CONV-48       | 3                      | 76.2  | 2-1/2                    | 63.5 | 0.070              | 1.78 | 2.940                    | 74.7  | 3.060                    | 77.7  | 3.750                     | 95.3  | 7                  | 177.8 |
| CV01-4.00-NT | CONV-64       | 4                      | 101.6 | 2-1/2                    | 63.5 | 0.070              | 1.78 | 3.940                    | 100.1 | 4.060                    | 103.1 | 4.750                     | 120.6 | 9                  | 228.6 |

\*\* Minimum 36" length.

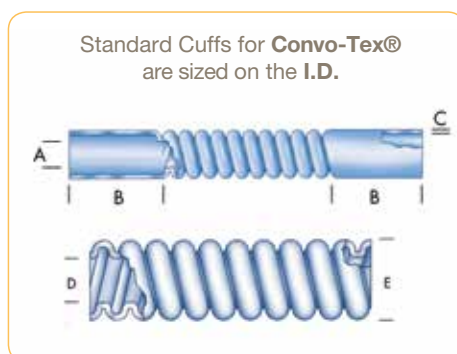

# PTFE Convoluted

## Series Low Profile and Heavy Wall



### Applications/Markets



- Fluid Handling
- Harnesses
- Lab Equipment
- Robotics

### Order Information

**Example: CVH01-1/8-NT**

**CVH01-1/8-NT – CVH - Heavywall Convoluted**  
– CVL Low Profile Convoluted

CVH01-1/8-NT – **PTFE**

CVH01-**1/8**-NT – **Size to Order (1/8")**

CVH01-1/8-**NT** – **Color (N=Natural)**

CVH01-1/8-NT- "**T**" is **bulk** (for cuffed tubing, remove "**T**" and add length, ie. CVH01-1/8-N1200 = 1" Heavy Wall Convo, natural, cut 12" long)

### Notes

- Working Temperature: 500°F (260°C)
- Standard cuffs for Convo-Tex are sized on the Inside Diameter
- Wire wrap reinforcement can be added for increased pressure applications or when a tighter bend radius is needed
- Minimum quantities may apply
- Custom packaging, sizes, lengths, cuffs and colors are quoted upon request

### Features

- Chemically inert
- Low coefficient of friction
- Very flexible
- Self extinguishing
- Non-wetting

### Low Profile

- Larger inside diameter
- Increased Flow

### Heavy Wall

- Reinforces the strength of the tube allowing for braiding or covering, flanging or flaring
- Handles higher vacuum

### Certifications

- AMS 3653E
- VW1, UL-83
- FDA Compliant
- USP Class VI Compliant

### Colors

- ○ Natural, Opaque to Translucent
- Colors available as custom run, see color code table


| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## PTFE Low Profile Convoluted

(Standard tubing is natural)

| Part Number   | Size To Order | Min. Inside Diameter |      | Max. Inside Diameter |      | Max. Outside Diameter |      | Wall Thickness |      | **Min. Bend Radius |     |
|---------------|---------------|----------------------|------|----------------------|------|-----------------------|------|----------------|------|--------------------|-----|
|               |               | inch                 | mm   | inch                 | mm   | inch                  | mm   | inch           | mm   | inch               | mm  |
| CVL01-3/8-NT  | 3/8           | 0.394                | 10.0 | 0.406                | 10.3 | 0.560                 | 14.2 | 0.023          | 0.58 | 1/2                | 13  |
| CVL01-1/2-NT  | 1/2           | 0.490                | 12.5 | 0.510                | 13.0 | 0.700                 | 17.8 | 0.025          | 0.64 | 3/4                | 19  |
| CVL01-3/4-NT  | 3/4           | 0.740                | 18.8 | 0.760                | 19.3 | 0.980                 | 24.9 | 0.035          | 0.89 | 1.88               | 48  |
| CVL01-1.00-NT | 1             | 0.990                | 25.1 | 1.010                | 25.7 | 1.260                 | 32.0 | 0.035          | 0.89 | 2-1/4              | 57  |
| CVL01-1.25-NT | 1-1/4         | 1.210                | 30.7 | 1.250                | 31.8 | 1.539                 | 39.1 | 0.035          | 0.89 | 3                  | 76  |
| CVL01-1.50-NT | 1-1/2         | 1.520                | 38.6 | 1.540                | 39.1 | 1.870                 | 47.5 | 0.044          | 1.12 | 3-1/2              | 89  |
| CVL01-1.75-NT | 1-3/4         | 1.690                | 42.9 | 1.750                | 44.5 | 2.100                 | 53.3 | 0.040          | 1.02 | 4-1/4              | 108 |
| CVL01-2.00-NT | 2             | 2.010                | 51.1 | 2.030                | 51.6 | 2.370                 | 60.2 | 0.043          | 1.09 | 4-3/4              | 121 |

\*\* Minimum 36 length.

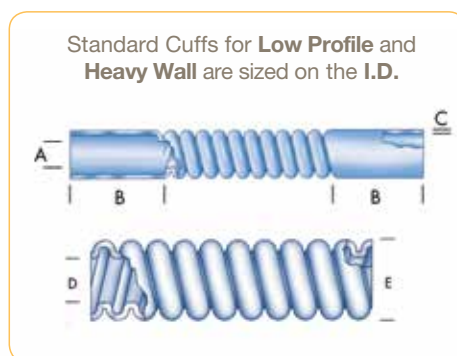

## PTFE Heavy Wall Convoluted

(Standard tubing is natural)

| Part Number   | Size To Order | Min. Inside Diameter |      | Max. Inside Diameter |      | Max. Outside Diameter |      | Wall Thickness |      | **Min. Bend Radius |     |
|---------------|---------------|----------------------|------|----------------------|------|-----------------------|------|----------------|------|--------------------|-----|
|               |               | inch                 | mm   | inch                 | mm   | inch                  | mm   | inch           | mm   | inch               | mm  |
| CVH01-1/4-NT  | 1/4           | 0.257                | 6.5  | 0.265                | 6.7  | 0.415                 | 10.5 | 0.025          | 0.38 | 3/4                | 19  |
| CVH01-3/8-NT  | 3/8           | 0.335                | 8.5  | 0.345                | 8.8  | 0.510                 | 13.0 | 0.025          | 0.64 | 1                  | 25  |
| CVH01-1/2-NT  | 1/2           | 0.454                | 11.5 | 0.466                | 11.8 | 0.700                 | 17.8 | 0.035          | 0.89 | 1-1/2              | 38  |
| CVH01-3/4-NT  | 3/4           | 0.683                | 17.4 | 0.701                | 17.8 | 1.010                 | 25.7 | 0.500          | 1.27 | 1.88               | 48  |
| CVH01-1.00-NT | 1             | 0.841                | 21.4 | 0.859                | 21.8 | 1.210                 | 30.7 | 0.053          | 1.35 | 2-1/2              | 64  |
| CVH01-1.25-NT | 1-1/4         | 1.125                | 28.6 | 1.145                | 29.1 | 1.610                 | 40.9 | 0.062          | 1.57 | 3.13               | 79  |
| CVH01-1.50-NT | 1-1/2         | 1.420                | 36.1 | 1.480                | 37.6 | 1.880                 | 47.8 | 0.062          | 1.57 | 3-3/4              | 95  |
| CVH01-1.75-NT | 1-3/4         | 1.540                | 39.1 | 1.600                | 40.6 | 2.100                 | 53.3 | 0.062          | 1.57 | 4-1/2              | 114 |
| CVH01-2.00-NT | 2             | 1.770                | 45.0 | 1.830                | 46.5 | 2.432                 | 61.8 | 0.062          | 1.57 | 4-3/4              | 120 |
| CVH01-2.50-NT | 2-1/2         | 2.460                | 62.5 | 2.540                | 64.5 | 3.210                 | 81.5 | 0.062          | 1.57 | 5                  | 127 |
| CVH01-3.00-NT | 3             | 2.940                | 74.7 | 3.060                | 77.7 | 3.750                 | 95.3 | 0.062          | 1.57 | 7                  | 178 |
| CVH01-4.00-NT | 4             | 3.90                 | 100  | 4.060                | 103  | 4.750                 | 121  | 0.070          | 1.77 | 9                  | 229 |

\*\* Minimum 36 length.

# PTFE Convuluted

## Series SAE AS81914/1 and SAE AS81914/2



### Features

- Chemically inert
- Low coefficient of friction
- Very flexible
- Self extinguishing
- Non-wetting

### Certifications

- AMS 3653E
- SAE AS81914/1
- SAE AS81914/2
- FDA Compliant

### Applications/Markets



- Fluid Handling
- Harnesses
- Crush Resistant Cover
- Robotics

### Order Information

**Example: 81914/1-1010-0TC**

**81914/1-1010-0TC – SAE AS81914 Convuluted**

81914/**1**-1010-0TC – **PTFE**

81914/1-**10**10-0TC – **Helical Convolutions**

81914/1-10**10**-0TC – **Size (10=1.000")**

81914/1-1010-**0**TC – **Color (0=Black)**

81914/1-1010-**0TC** – **"T" is bulk -** (for cuffed tubing, remove "T" and add length, ie. 81914/1-1010-01200 = 187" Convo, black, cut 12" long

### Notes

- Working Temperature: 500°F (260°C)
- Tubing is provided in black without cuffs direct from inventory
- Stock packaging is random coils
- Also available in close convolution 81914/2
- Minimum quantities may apply
- Custom packaging, sizes, lengths, cuffs and colors are quoted upon request

### Colors

- ● Black
- Colors available as custom run, see color code table

When ordering convoluted tubing in colors, the "N" designation for natural should be replaced by the correct color designator;

ie 81914/1-101-0T (black bulk tubing)

ie 81914/1-101-01200 (black tubing - 12 inches long)


| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## PTFE Convoluted Tubing (SAE AS81914/1)

(Standard tubing is black)

| Part Number      | MIL Spec* | Maximum Inside Diameter |      | Minimum Inside Diameter |      | Maximum Outside Diameter |      | Maximum Wall Thickness |       | Minimum Bend Radius |     | Pitch<br>±1 | Weight      |              |
|------------------|-----------|-------------------------|------|-------------------------|------|--------------------------|------|------------------------|-------|---------------------|-----|-------------|-------------|--------------|
|                  |           | inch                    | mm   | inch                    | mm   | inch                     | mm   | inch                   | mm    | inch                | mm  |             | lb./100 ft. | kg./100 mtr. |
| 81914/1-1001-OTC | -1        | 0.188                   | 4.78 | 0.181                   | 4.6  | 0.320                    | 8.13 | 0.023                  | 0.584 | 1/2                 | 13  | 8           | 2           | 2.98         |
| 81914/1-1002-OTC | -2        | 0.281                   | 7.14 | 0.273                   | 6.93 | 0.414                    | 10.5 | 0.027                  | 0.686 | 3/4                 | 19  | 7.5         | 2.9         | 4.31         |
| 81914/1-1003-OTC | -3        | 0.312                   | 7.93 | 0.303                   | 7.7  | 0.450                    | 11.4 | 0.027                  | 0.686 | 7/8                 | 22  | 7.5         | 3.6         | 5.36         |
| 81914/1-1004-OTC | -4        | 0.375                   | 9.53 | 0.364                   | 9.25 | 0.530                    | 13.5 | 0.029                  | 0.737 | 1                   | 25  | 7           | 4.2         | 6.25         |
| 81914/1-1005-OTC | -5        | 0.437                   | 11.1 | 0.425                   | 10.8 | 0.590                    | 15.0 | 0.029                  | 0.737 | 1-1/4               | 32  | 7           | 4.9         | 7.29         |
| 81914/1-1006-OTC | -6        | 0.500                   | 12.7 | 0.485                   | 12.3 | 0.660                    | 16.8 | 0.029                  | 0.737 | 1-1/2               | 38  | 7           | 5.2         | 7.74         |
| 81914/1-1007-OTC | -7        | 0.625                   | 15.9 | 0.608                   | 15.4 | 0.780                    | 19.9 | 0.035                  | 0.889 | 1-3/4               | 44  | 7           | 6.9         | 10.3         |
| 81914/1-1008-OTC | -8        | 0.750                   | 19.1 | 0.730                   | 18.5 | 0.975                    | 24.8 | 0.035                  | 0.889 | 1.88                | 48  | 6           | 10.4        | 15.5         |
| 81914/1-1009-OTC | -9        | 0.875                   | 22.2 | 0.850                   | 21.6 | 1.100                    | 27.9 | 0.035                  | 0.889 | 2-1/4               | 57  | 6           | 11.3        | 16.8         |
| 81914/1-1010-OTC | -10       | 1.000                   | 25.4 | 0.975                   | 24.8 | 1.260                    | 32.0 | 0.035                  | 0.889 | 2-1/2               | 64  | 4.5         | 12.6        | 18.8         |
| 81914/1-1011-OTC | -11       | 1.125                   | 28.6 | 1.100                   | 27.9 | 1.390                    | 35.3 | 0.035                  | 0.889 | 2-3/4               | 70  | 4.5         | 13.8        | 20.5         |
| 81914/1-1012-OTC | -12       | 1.250                   | 31.8 | 1.210                   | 30.7 | 1.539                    | 39.1 | 0.035                  | 0.889 | 3                   | 76  | 4           | 15.5        | 23.1         |
| 81914/1-1013-OTC | -13       | 1.500                   | 38.1 | 1.440                   | 36.6 | 1.810                    | 46.0 | 0.040                  | 1.020 | 3.75                | 95  | 4           | 21.7        | 32.3         |
| 81914/1-1014-OTC | -14       | 1.750                   | 44.5 | 1.690                   | 42.9 | 2.100                    | 53.3 | 0.045                  | 1.140 | 4.25                | 108 | 4           | 25.3        | 37.6         |
| 81914/1-1015-OTC | -15       | 2.000                   | 50.8 | 1.940                   | 49.3 | 2.350                    | 59.7 | 0.045                  | 1.140 | 4.75                | 121 | 4           | 29          | 43.2         |

\*PTFE convoluted tubing is provided in BLACK without cuffs direct from the factory. Black part numbers are designated with "OT" and Natural part numbers are designated with "NT" after the Mil Spec number (ie 81914/1-1014-OT).

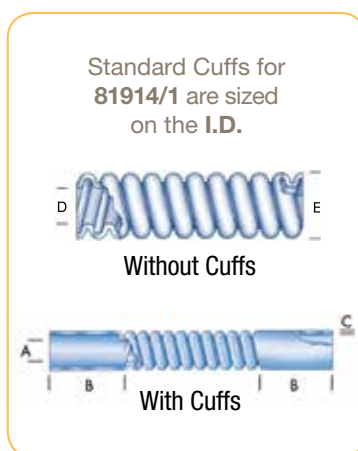

[illegible]

# PVDF PRODUCTS

## PVDF Smoothbore

Fractional Flex™ Industrial Wall  
Fractional Flex™ Heavy Wall

Fractional SuperFlex™ Industrial Wall  
Fractional SuperFlex™ Heavy Wall

## PVDF (Polyvinylidene Fluoride)

Working Temperature: 265°F (130°C)  
Color: Varies

- Very good chemical resistance
- Excellent resistance to creep and fatigue
- UV Resistant
- Weldable
- Exceptional corrosion resistance for chlorine, fluorine or bromine environments



Intro

PFA  
Tubing  
A

FEP  
Tubing  
B

PTFE  
Tubing  
C

PVDF  
Tubing  
D

ETFE  
Tubing  
E

Technical  
Pages  
F

Index  
G

# PVDF Tubing Polyvinylidene Fluoride

## Series PVDF Flex™: 110, Series PVDF Super-Flex™: 111



### Features

- Low extractable levels
- High mechanical strength
- Good chemical resistance
- High abrasion resistance
- Exceptional thermal stability
- Low permeability
- Self extinguishing
- Weather resistant

### Certifications

- ASTM D3222
- FDA Compliant
- RoHS
- VW-1, UL-83

### Applications/Markets



- Applications with long cycle life
- Gas
- Food
- Thermal cycling
- Outdoor/extreme conditions
- Water systems
- Ground water monitoring
- Fluid handling

### Order Information

**Example: 110-0312062-NT-100**

**110-0312062-NT-100 – PVDF Flex**

110-**0312062**-NT-100 – **Tube O.D.** in inches (**5/16"**)

110-0312**062**-NT-100 – **Tube Wall Thickness** in inches (**.062"**)

110-0312062-**NT**-100 – **Natural**

110-0312062-**NT**-100 – **Bulk Tubing**

110-0312062-NT-**100** – **Package Quantity** in feet (**100'**)

### Notes

- Working Temperature: -80°F to 265°F (-62°C to 130°C)
- Vacuum rating is 28 inHg at 73°F
- Working pressure calculated using a Design Factor of 4 at 73°F (23°C) (Actual performance may vary with different media and working conditions) Working pressure is reduced with rising temperature. This effect is more pronounced with 111 SuperFlex®. See example below.
- Custom packaging and sizes are quoted upon request

### Fittings

Fittings available for sizes 1/8" up to 1"

Parker Fittings available from:  
Fluid System Connectors Division  
Otsego, MI

(269) 694-2550


(269) 692-6634 FAX

FSC Product Families:






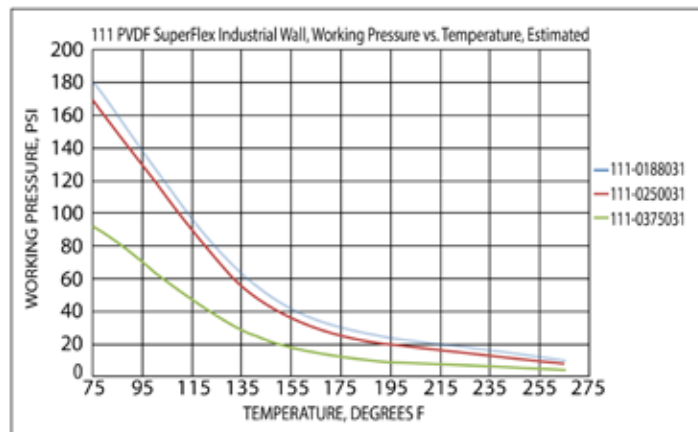


- Compression
- Compress-Align®
- TrueSeal™

### Colors









- ○ Natural (off-white)











## 110 PVDF Flex™ Industrial Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |        |       |       | Nominal I.D.  |        |       |       | Reference Wall  |      | Working Pressure   |          | Burst Pressure  |          | Min. Bend Radius  |     | Vac. Rating | Weight  |   |
|-------------|------------|---|--------|-------|-------|---|--------|-------|-------|---|------|--|----------|---|----------|---|-----|-------------|---|---|
| #           |            |  |        |       |       |  |        |       |       |  |      |  |          |  |          |  |     |             |  |  |
|             | inch       | inch  | tol.   | mm    | tol.  | inch  | tol.   | mm    | tol.  | inch  | mm   | psi 73°F   | bar 23°C | psi 73°F  | bar 23°C | inch  | mm  | at 73°F     | lb. per ft.   | kg. per m.  |
| 110-0125031 | 1/8        | 0.125   | ±0.005 | 3.18  | ±0.13 | 0.062   | ±0.005 | 1.57  | ±0.13 | 0.031   | 0.79 | 267  | 18.4     | 1068  | 73.6     | 0.500   | 13  | 28          | 0.007   | 0.011   |
| 110-0188031 | 3/16       | 0.188   | ±0.005 | 4.78  | ±0.13 | 0.125   | ±0.005 | 3.18  | ±0.13 | 0.031   | 0.79 | 180  | 12.4     | 720   | 49.6     | 0.750   | 19  | 28          | 0.012   | 0.018   |
| 110-0250031 | 1/4        | 0.250   | ±0.005 | 6.35  | ±0.13 | 0.188   | ±0.005 | 4.78  | ±0.13 | 0.031   | 0.79 | 170  | 11.7     | 680   | 46.8     | 1.000   | 25  | 28          | 0.016   | 0.025   |
| 110-0375031 | 3/8        | 0.375   | ±0.005 | 9.52  | ±0.13 | 0.312   | ±0.005 | 7.92  | ±0.13 | 0.031   | 0.79 | 92   | 6.34     | 459   | 31.6     | 2.500   | 64  | 28          | 0.026   | 0.039   |
| 110-0500031 | 1/2        | 0.500   | ±0.005 | 12.70 | ±0.13 | 0.438   | ±0.005 | 11.13 | ±0.13 | 0.031   | 0.79 | 83   | 5.7      | 332   | 22.9     | 4.000   | 102 | 28          | 0.035   | 0.053   |









## 110 PVDF Flex™ Heavy Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |        |       |       | Nominal I.D.  |        |       |       | Reference Wall  |  | Working Pressure  |   | Burst Pressure |          | Min. Bend Radius |     | Vac. Rating   | Weight  |            |
|-------------|------------|---|--------|-------|-------|---|--------|-------|-------|---|--|---|---|----------------|----------|------------------|-----|---|---|------------|
| #           |            |  |        |       |       |  |        |       |       |  |  |  |  |                |          |                  |     |  |  |            |
|             | inch       | inch  | tol.   | mm    | tol.  | inch  | tol.   | mm    | tol.  | inch  | mm   | psi 73°F  | bar 23°C  | psi 73°F       | bar 23°C | inch             | mm  | at 73°F   | lb. per ft.   | kg. per m. |
| 110-0250047 | 1/4        | 0.250   | ±0.005 | 6.35  | ±0.13 | 0.156   | ±0.005 | 3.96  | ±0.13 | .047  | 1.19   | 208   | 14.3  | 832            | 57.4     | 0.750            | 19  | 28  | 0.023   | 0.034      |
| 110-0250062 | 1/4        | 0.250   | ±0.005 | 6.35  | ±0.13 | 0.125   | ±0.005 | 3.18  | ±0.13 | .062  | 1.57   | 330   | 22.8  | 1320           | 91.0     | 0.500            | 13  | 28  | 0.028   | 0.042      |
| 110-0312062 | 5/16       | 0.312   | ±0.005 | 7.92  | ±0.13 | 0.188   | ±0.005 | 4.78  | ±0.13 | .062  | 1.57   | 224   | 15.4  | 896            | 61.8     | 0.875            | 22  | 28  | 0.038   | 0.056      |
| 110-0375062 | 3/8        | 0.375   | ±0.005 | 9.52  | ±0.13 | 0.250   | ±0.005 | 6.35  | ±0.13 | .062  | 1.57   | 219   | 15.1  | 876            | 60.4     | 1.000            | 25  | 28  | 0.047   | 0.070      |
| 110-0500062 | 1/2        | 0.500   | ±0.005 | 12.70 | ±0.13 | 0.370   | ±0.005 | 9.40  | ±0.13 | .062  | 1.57   | 169   | 11.7  | 676            | 46.6     | 2.000            | 51  | 28  | 0.066   | 0.098      |
| 110-0625062 | 5/8        | 0.625   | ±0.005 | 15.88 | ±0.13 | 0.500   | ±0.005 | 12.70 | ±0.13 | .062  | 1.57   | 136   | 9.3   | 544            | 37.5     | 3.000            | 76  | 28  | 0.085   | 0.126      |
| 110-0750062 | 3/4        | 0.750   | ±0.006 | 19.05 | ±0.15 | 0.625   | ±0.006 | 15.88 | ±0.15 | .062  | 1.57   | 114   | 7.9   | 456            | 31.4     | 6.000            | 152 | 28  | 0.103   | 0.154      |
| 110-1000062 | 1          | 1.000   | ±0.010 | 25.40 | ±0.25 | 0.875   | ±0.008 | 22.22 | ±0.25 | .062  | 1.57   | 86  | 5.9   | 344            | 23.7     | 8.000            | 203 | 28  | 0.141   | 0.210      |

## 111 PVDF Super-Flex™ Industrial Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |        |      |       | Nominal I.D.  |        |      |       | Reference Wall  |      | Working Pressure   |          | Burst Pressure  |          | Min. Bend Radius  |    | Vac. Rating | Weight  |   |
|-------------|------------|---|--------|------|-------|---|--------|------|-------|---|------|--|----------|---|----------|---|----|-------------|---|---|
| #           |            |  |        |      |       |  |        |      |       |  |      |  |          |  |          |  |    |             |  |  |
|             | inch       | inch  | tol.   | mm   | tol.  | inch  | tol.   | mm   | tol.  | inch  | mm   | psi 73°F   | bar 23°C | psi 73°F  | bar 23°C | inch  | mm | at 73°F     | lb. per ft.   | kg. per m.  |
| 111-0188031 | 3/16       | 0.188   | ±0.005 | 4.78 | ±0.13 | 0.125   | ±0.005 | 3.18 | ±0.13 | 0.031   | 0.79 | 180  | 12.4     | 720   | 50       | 0.750   | 19 | 28          | 0.012   | 0.018   |
| 111-0250031 | 1/4        | 0.250   | ±0.005 | 6.35 | ±0.13 | 0.188   | ±0.005 | 4.78 | ±0.13 | 0.031   | 0.79 | 170  | 11.7     | 680   | 47       | 0.750   | 19 | 28          | 0.016   | 0.025   |
| 111-0375031 | 3/8        | 0.375   | ±0.005 | 9.53 | ±0.13 | 0.312   | ±0.005 | 7.92 | ±0.13 | 0.031   | 0.79 | 93   | 6.4      | 372   | 26       | 2.500   | 64 | 28          | 0.026   | 0.039   |

## 111 PVDF Super-Flex™ Heavy Wall Fractional Size Tubing

| Part Number | Order Size | Nominal O.D.  |        |      |       | Nominal I.D.  |        |      |       | Reference Wall  |      | Working Pressure   |          | Burst Pressure  |          | Min. Bend Radius  |    | Vac. Rating | Weight  |   |
|-------------|------------|---|--------|------|-------|---|--------|------|-------|---|------|--|----------|---|----------|---|----|-------------|---|---|
| #           |            |  |        |      |       |  |        |      |       |  |      |  |          |  |          |  |    |             |  |  |
|             | inch       | inch  | tol.   | mm   | tol.  | inch  | tol.   | mm   | tol.  | inch  | mm   | psi 73°F   | bar 23°C | psi 73°F  | bar 23°C | inch  | mm | at 73°F     | lb. per ft.   | kg. per m.  |
| 111-0250062 | 1/4        | 0.250   | ±0.005 | 6.35 | ±0.13 | 0.125   | ±0.005 | 3.18 | ±0.13 | 0.062   | 1.57 | 330  | 22.8     | 1320  | 91       | 0.375   | 10 | 28          | 0.028   | 0.042   |
| 111-0375062 | 3/8        | 0.375   | ±0.005 | 9.52 | ±0.13 | 0.250   | ±0.005 | 6.35 | ±0.13 | 0.062   | 1.57 | 224  | 15.4     | 896   | 62       | 0.750   | 19 | 28          | 0.047   | 0.070   |
| 111-0500062 | 1/2        | 0.500   | ±0.005 | 12.7 | ±0.13 | 0.375   | ±0.005 | 9.52 | ±0.13 | 0.062   | 1.57 | 169  | 11.7     | 676   | 47       | 1.500   | 38 | 28          | 0.066   | 0.098   |

For detailed ordering information, please consult price list or contact Parker TexLoc®.

[illegible]

# ETFE PRODUCTS

**ETFE Heat Shrink**  
1.5:1

**ETFE Convoluted**  
SAE AS81914/5

**ETFE (Ethylene Tetrafluoroethylene)**

Working Temperature: 302°F (150°C)

Color: Clear

- Best abrasion resistance
- Chemically inert
- Excellent tear resistance
- Low permeability
- Superior impact strength to PTFE
- Excellent for cryogenic applications



Intro

PFA  
Tubing  
**A**

FEP  
Tubing  
**B**

PTFE  
Tubing  
**C**

PVDF  
Tubing  
**D**

ETFE  
Tubing  
**E**

Technical  
Pages  
**F**

Index  
**G**

# ETFE Industrial Wall Heat Shrink

## Series HS1.5ETFE



### Features

- Superior abrasion resistance
- Greater tensile strength than other heat shrink products
- Self extinguishing

### Certifications

- AMS DTL 23053/14A, Class 1

### Applications/Markets



- Wire splices
- Rollers
- Protective covering
- Robotics

### Order Information

**Example: HS1.5ETFE3/32-NC48.000**

**HS1.5ETFE3/32-NC48.000 – 1.5:1 Heat Shrink**

HS1.5**ETFE**3/32-NC48.000 – **ETFE**

HS1.ETFE**3/32**-NC48.000 – **Size** in inch (**0.094"**)

HS1.ETFE3/32-**NC**48.000 – **Natural**

HS1.5ETFE3/32-NC**48.000** – **Cut Tubing**

HS1.5ETFE3/32-NC**48.000** – **Package Quantity** in inch (**48"**)

### Notes

- Working Temperature: 302°F (150°C)
- Shrink Temperature  
347°F (175°C) for 10 minutes
- \*Dielectric Strength:  $\geq 2,000$  V/M, per ASTM D 149 short term test of 10 MIL thickness (Volts/MIL)
- Heat Shrink tubing is available in stock packaging of 4-ft. straight lengths
- Minimum quantities may apply
- Custom packaging, sizes, lengths and colors are quoted upon request

### Colors

- ○ Natural, Opaque to translucent
- Colors available as custom run, see color code table


When ordering coiled tubing in colors, the color code is always followed by TC; when ordering cut lengths, the color code is followed by CC

ie HS1.ETFE3/32-2TC ie HS1.ETFE3/32-0CC48.0000

| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## HS1.5ETFE HEAT SHRINK

| Part Number   | Size  | Mil Spec*    | Minimum Expanded I.D. |      | Maximum Recovered I.D. |      | Nominal Recovered Wall |             |
|---------------|-------|--------------|-----------------------|------|------------------------|------|------------------------|-------------|
|               |       |              | inch                  | mm   | inch                   | mm   | inch                   | mm          |
| HS1.5ETFE3/32 | 3/32  | 23053/14-001 | 0.093                 | 2.36 | 0.062                  | 1.57 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS1.5ETFE1/8  | 1/8   | 23053/14-002 | 0.125                 | 3.18 | 0.083                  | 2.11 | 0.010 ± 0.003          | 0.25 ± 0.08 |
| HS1.5ETFE3/16 | 3/16  | 23053/14-003 | 0.188                 | 4.78 | 0.125                  | 3.18 | 0.011 ± 0.003          | 0.25 ± 0.08 |
| HS1.5ETFE1/4  | 1/4   | 23053/14-004 | 0.250                 | 6.35 | 0.166                  | 4.22 | 0.013 ± 0.003          | 0.33 ± 0.08 |
| HS1.5ETFE3/8  | 3/8   | 23053/14-005 | 0.375                 | 9.52 | 0.250                  | 6.35 | 0.013 ± 0.003          | 0.33 ± 0.08 |
| HS1.5ETFE1/2  | 1/2   | 23053/14-006 | 0.500                 | 12.7 | 0.345                  | 8.76 | 0.013 ± 0.003          | 0.33 ± 0.08 |
| HS1.5ETFE3/4  | 3/4   | 23053/14-007 | 0.750                 | 19.1 | 0.500                  | 12.7 | 0.018 ± 0.004          | 0.46 ± 0.10 |
| HS1.5ETFE1.00 | 1     | 23053/14-008 | 1.000                 | 25.4 | 0.665                  | 16.9 | 0.022 ± 0.004          | 0.51 ± 0.10 |
| HS1.5ETFE1.25 | 1-1/4 | 23053/14-009 | 1.250                 | 31.8 | 0.835                  | 21.2 | 0.030 ± 0.004          | 0.76 ± 0.10 |
| HS1.5ETFE1.50 | 1-1/2 | 23053/14-010 | 1.500                 | 38.1 | 1.000                  | 25.4 | 0.030 ± 0.004          | 0.76 ± 0.10 |

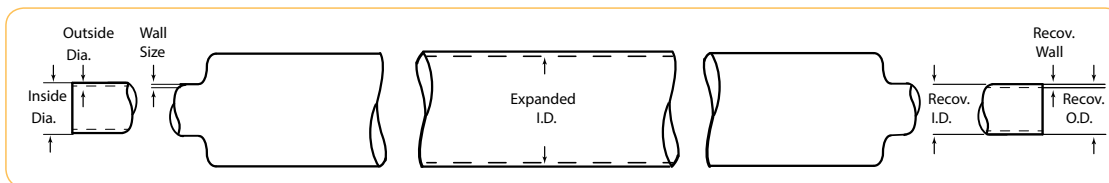

# ETFE Convoluted

Series SAE AS81914/6 and SAE AS81914/5



## Features

- Chemically inert
- Increased abrasion resistance
- Low coefficient of friction
- Very flexible
- Self extinguishing
- Non-wetting

## Certifications

- SAE AS81914/6
- SAE AS81914/5
- FDA Compliant

## Applications/Markets



- Fluid Handling
- Harnesses
- Crush Resistant Cover
- Robotics

## Order Information

**Example: 81914/6-1006-NT**

**81914/6-1006-NT – SAE AS81914 Convoluted**

81914/6-1006-NT – **ETFE**

81914/6-1006-NT – **Helical Convolutions**

81914/6-1006-NT – **Size (6=0.625")**

81914/6-1006-NT – **Color (N=Natural)**

81914/6-1006-NT – "T" is bulk - for cut tubing add length,  
ie. 81914/6-1006-N1200 = .625" Convo, natural, cut 12" long

## Colors

- ○ Translucent
- Colors available as custom run, see color code table

| Color Code |   |         |   |   |        |
|------------|---|---------|---|---|--------|
| ○          | N | Natural | ● | 5 | Green  |
| ●          | 0 | Black   | ● | 6 | Blue   |
| ●          | 1 | Brown   | ● | 7 | Violet |
| ●          | 2 | Red     | ● | 8 | Gray   |
| ●          | 3 | Orange  | ○ | 9 | White  |
| ●          | 4 | Yellow  |   |   |        |

## Notes

- Working Temperature: 302°F (150°C)
- Tubing is provided in black without cuffs direct from inventory
- Stock packaging is random coils
- Also available in close convolution 81914/5
- Minimum quantities may apply
- Custom packaging, sizes, lengths, cuffs and colors are quoted upon request

## ETFE Convoluted Tubing (SAE AS81914/6)

(Standard tubing is natural)

| Part Number     | MIL Spec* | Maximum Inside Diameter |      | Minimum Inside Diameter |      | Maximum Outside Diameter |      | Maximum Wall Thickness |       | Minimum Bend Radius |     | Pitch | Weight      |              |
|-----------------|-----------|-------------------------|------|-------------------------|------|--------------------------|------|------------------------|-------|---------------------|-----|-------|-------------|--------------|
|                 |           | inch                    | mm   | inch                    | mm   | inch                     | mm   | inch                   | mm    | inch                | mm  |       | lb./100 ft. | kg./100 mtr. |
| 81914/6-1001-NT | -1        | 0.188                   | 4.78 | 0.181                   | 4.60 | 0.320                    | 8.13 | 0.018                  | 0.457 | .500                | 31  | 8     | 1.2         | 1.79         |
| 81914/6-1002-NT | -2        | 0.281                   | 7.14 | 0.273                   | 6.93 | 0.414                    | 10.5 | 0.018                  | 0.457 | .750                | 19  | 8     | 1.4         | 2.08         |
| 81914/6-1003-NT | -3        | 0.312                   | 7.93 | 0.306                   | 7.77 | 0.450                    | 11.4 | 0.018                  | 0.457 | .750                | 19  | 8     | 1.5         | 2.23         |
| 81914/6-1004-NT | -4        | 0.375                   | 9.53 | 0.359                   | 9.12 | 0.510                    | 13.0 | 0.018                  | 0.457 | .880                | 22  | 8     | 1.8         | 2.68         |
| 81914/6-1005-NT | -5        | 0.437                   | 11.1 | 0.427                   | 10.9 | 0.571                    | 14.5 | 0.018                  | 0.457 | .880                | 22  | 8     | 2.5         | 3.72         |
| 81914/6-1006-NT | -6        | 0.500                   | 12.7 | 0.485                   | 12.3 | 0.650                    | 16.5 | 0.023                  | 0.584 | 1.250               | 32  | 7     | 3.2         | 4.76         |
| 81914/6-1007-NT | -7        | 0.625                   | 15.9 | 0.608                   | 15.4 | 0.770                    | 19.6 | 0.023                  | 0.584 | 1.500               | 38  | 7     | 3.9         | 5.8          |
| 81914/6-1008-NT | -8        | 0.750                   | 19.1 | 0.730                   | 18.5 | 0.930                    | 23.6 | 0.023                  | 0.584 | 1.750               | 44  | 6     | 4.9         | 7.29         |
| 81914/6-1009-NT | -9        | 0.875                   | 22.2 | 0.860                   | 21.8 | 1.073                    | 27.3 | 0.023                  | 0.584 | 2.000               | 51  | 5     | 5.6         | 8.33         |
| 81914/6-1010-NT | -10       | 1.000                   | 25.4 | 0.975                   | 24.8 | 1.226                    | 31.1 | 0.023                  | 0.584 | 2.370               | 60  | 5     | 6.8         | 10.12        |
| 81914/6-1011-NT | -11       | 1.125                   | 28.6 | 1.105                   | 28.1 | 1.390                    | 35.3 | 0.023                  | 0.584 | 2.370               | 60  | 5     | 7.5         | 11.16        |
| 81914/6-1012-NT | -12       | 1.250                   | 31.8 | 1.205                   | 30.7 | 1.539                    | 39.1 | 0.023                  | 0.584 | 2-.750              | 70  | 4     | 8.8         | 13.09        |
| 81914/6-1013-NT | -13       | 1.500                   | 38.1 | 1.437                   | 36.5 | 1.832                    | 46.5 | 0.023                  | 0.584 | 3.380               | 86  | 4     | 10.2        | 15.18        |
| 81914/6-1014-NT | -14       | 1.750                   | 44.5 | 1.688                   | 42.9 | 2.082                    | 52.9 | 0.023                  | 0.584 | 3.880               | 99  | 4     | 11.9        | 17.71        |
| 81914/6-1015-NT | -15       | 2.000                   | 50.8 | 1.937                   | 49.2 | 2.332                    | 59.2 | 0.023                  | 0.584 | 4.250               | 108 | 4     | 13.5        | 20.01        |

\*ETFE convoluted tubing is provided in NATURAL without cuffs direct from the factory. Natural part numbers are designated with "NT" after the Mil Spec number (ie 81914/6-1014-NT)

[illegible]

# TECHNICAL INFO

Property Quick Reference

Property Comparison Chart

Chemical Resistance Guide

Parker Safety Guide

Parker Offer of Sale

Intro

PFA  
Tubing  
**A**

FEP  
Tubing  
**B**

PTFE  
Tubing  
**C**

PVDF  
Tubing  
**D**

ETFE  
Tubing  
**E**

Technical  
Pages  
**F**

Index  
**G**

# Property Quick Reference

PFA  
Tubing  
A

## PFA (Perfluoroalkoxy)

Working Temperature: 500°F (260°C)

Color: Clear with light blue or tint

- High purity resins available
- Low permeation resins available
- Use when you need the temperature range of PTFE and the clarity of FEP
- Exceptional heat resistance
- Self extinguishing
- Non-wetting
- Good flexlife

PTFE  
Tubing  
B

## PTFE (Polytetrafluoroethylene)

Working Temperature: 500°F (260°C)

Color: Opaque to translucent

- Chemically inert
- Lowest coefficient of friction
- Superior dielectric strength
- Exceptional heat resistance
- Self extinguishing
- Non-wetting
- Excellent flexlife
- Laser markable

PTFE  
Tubing  
C

## High Purity PFA (Perfluoroalkoxy)

Working Temperature: 500°F (260°C)

Color: Clear with light blue or tint

See characteristics of PFA with these additional features:

- Lowest level of extractables
- Highest molecular weight available
- Withstands corrosive surfactants for longer periods of time
- Higher flow
- Higher purity

PVDF  
Tubing  
D

## PVDF (Polyvinylidene Fluoride)

Working Temperature: 265°F (130°C)

Color: Varies

- Very good chemical resistance
- Excellent resistance to creep and fatigue
- UV Resistant
- Weldable
- Exceptional corrosion resistance for chlorine, fluorine, or bromine environments

ETFE  
Tubing  
E

## FEP (Fluorinated Ethylene Propylene)

Working Temperature: 400°F (204°C)

Color: Clear

- Excellent chemical resistance
- Non-wetting
- Weldable
- Tubes can be sealed by melting
- Long continuous lengths
- Low refractive index
- Improved clarity over PFA
- Lower cost alternative to PFA

## ETFE (Ethylene Tetrafluoroethylene)

Working Temperature: 302°F (150°C)

Color: Clear

- Best abrasion resistance
- Chemically inert
- Excellent tear resistance
- Low permeability
- Superior impact strength to PTFE
- Excellent for cryogenic applications

Technical  
Pages  
F

Index  
G



# Property Comparison

The table below lists a generally accepted summary of properties that we believe to be reliable. Please note that many of these resins are produced in several varieties and property characteristics may vary. Therefore, determination of resin is dependent on the application and this table is only meant to serve as a general guideline.

| Properties*   | ASTM or Unit                                       | PTFE                                  | FEP                                   | PFA                                   | High Purity PFA        | PVDF                             | ETFE                       |
|---|--|---------------------------------------|---------------------------------------|---------------------------------------|------------------------|----------------------------------|----------------------------|
| <b>MECHANICAL PROPERTIES</b>                                |  |                                       |                                       |                                       |                        |                                  |                            |
| Specific Gravity  | D792<br>D3307                                      | 2.13-2.22<br>-                        | 2.12-2.17<br>-                        | 2.12-2.17<br>-                        | -<br>2.14-2.16         | 1.76-1.82<br>-                   | 1.74<br>-                  |
| Elongation %  | D638<br>D3307                                      | 200-450<br>-                          | 250-330<br>-                          | 280-400<br>-                          | -<br>370               | 100-800<br>-                     | 430<br>-                   |
| Tensile Strength (psi)                                      | D638(psi)<br>D3307(psi)                            | 2500<br>-                             | 3400<br>-                             | 3600<br>-                             | -<br>3600              | 3200<br>-                        | 5000<br>-                  |
| Flexural Strength (psi)                                     | D790   | no break                              | no break                              | no break                              | no break               | 1500-5000                        | 5500                       |
| Compressive Strength (psi)                                  | D695   | 700-900                               | 725-2200                              | 725-810                               | na                     | 2000-6000                        | 2500                       |
| Tensile Elastic Modulus (Young's Modulus) (psi)             | D638   | 57,000<br>-                           | 50,000<br>-                           | 72,500-87,000                         | na                     | 35,000-220,000                   | 116,030                    |
| Flexural Modulus  | D790(psi)<br>D790 103MPa<br>(103kgf/cm2)           | 71,000-85,000<br>0.5-0.6<br>(5.0-6.0) | 78,000-92,000<br>0.5-0.6<br>(5.5-6.4) | 94,000-99,000<br>0.6-0.7<br>(6.6-7.0) | -<br>647-686<br>-      | 90,000-168,000<br>280,00-110,000 | 130,534<br>-<br>-          |
| Flex Life (MIT cycles)                                      | D2176  | >1,000,000                            | 5,000-80,000                          | 10,000-500,000                        | 2000 x 10 <sup>3</sup> | na                               | na                         |
| Hardness Durometer Shore D                                  | D2240  | D50-65                                | D55                                   | D55-D60                               | D60                    | D55-D75                          | D67                        |
| Coefficient of Friction                                     | (on steel)   | 0.02                                  | 0.05                                  | 0.04-0.06                             | 0.05                   | 0.33-0.49                        | 0.20                       |
| Abrasion Resistance 1000 cycles                             | Taber  | 8-90                                  | 14-20                                 | 0.00-96.75                            | na                     | 16-33                            | 0.005                      |
| Impact Strength IZ0.D. 73°F (23°C) notched ft/lbs/in        | D256   | 3                                     | no break                              | no break                              | no break               | 4                                | no break                   |
| <b>THERMAL PROPERTIES</b>                                   |  |                                       |                                       |                                       |                        |                                  |                            |
| Melting Point   | °C<br>°F   | 327<br>621                            | 260<br>500                            | 305<br>582                            | 305<br>582             | 125<br>257                       | 260<br>500                 |
| Upper Service Temperature(20000h)                           | °C<br>°F   | 260<br>500                            | 204<br>400                            | 260<br>500                            | 260<br>500             | 130<br>260                       | 180<br>356                 |
| Flammability  | UL 94  | V-0                                   | V-0                                   | V-0                                   | V-0                    | V-0                              | V-0                        |
| Thermal Conductivity BTU-in/hr-ft <sup>2</sup> , °F         |  | 1.7-2.08                              | 1.4                                   | 1.3                                   | na                     | 1.00-1.25                        | 1.65                       |
| Thermal Conductivity Cal-cm/sec-cm <sup>2</sup> , °C        |  | 6 x 10 <sup>-4</sup>                  | 6 x 10 <sup>-4</sup>                  | 6 x 10 <sup>-6</sup>                  | na                     | na                               | 5.7 x 10 <sup>-4</sup>     |
| Linear Coefficient of Thermal Expansion Min/in°F 73.4-140°F | D696   | 55.6                                  | 46.1-58.3                             | 66.7                                  | na                     | 7.00-10.8                        | 9.4 (10 <sup>-5</sup> /°C) |
| Heat of Fusion  | BTU/LB   | 29-37                                 | 4-35                                  | 13                                    | na                     | 0.28-0.36                        | 20                         |
| Heat of Combustion  | BTU/LB °F  | 2200                                  | 2200                                  | 2300                                  | na                     | na                               | 8100                       |
| Low Temperature Embrittlement                               | °C<br>°F   | -268<br>-450                          | -268<br>-450                          | -268<br>-450                          | -268<br>-450           | -62<br>-80                       | -76<br>-105                |
| <b>ELECTRICAL PROPERTIES</b>                                |  |                                       |                                       |                                       |                        |                                  |                            |
| Dielectric Constant   | D150/10 <sup>3</sup> Hz<br>D150/10 <sup>6</sup> Hz | 2.1<br>2.1                            | 2.1<br>2.1                            | 2.1<br>2.1                            | 2.1<br>2.1             | 3.5<br>10.6                      | 2.6                        |
| Dielectric Strength   | D149/125 MIL<br>D149/10 MIL                        | 500<br>≥1400                          | 508<br>≥610                           | 500<br>≥1400                          | 500 - 600<br>na        | 0.8<br>1.5                       | na                         |
| Volume Resistivity  | D257/ohm-cm  | >10 <sup>18</sup>                     | >10 <sup>18</sup>                     | >10 <sup>18</sup>                     | na                     | 2 x 10 <sup>14</sup>             | 10 <sup>17</sup>           |
| Surface Resistivity   | D257/ohm-cm  | >10 <sup>18</sup>                     | >10 <sup>17</sup>                     | >10 <sup>17</sup>                     | na                     | 5 x 10 <sup>14</sup>             | >10 <sup>15</sup>          |
| <b>GENERAL PROPERTIES</b>                                   |  |                                       |                                       |                                       |                        |                                  |                            |
| Chemical/Solvent Resistance                                 | D543   | Excellent                             | Excellent                             | Excellent                             | Excellent              | Very Good                        | Excellent                  |
| Refractive Index  |  | 1.35                                  | 1.338                                 | 1.34                                  | 1.34                   | 1.42                             | 1.447                      |
| Limiting Oxygen Index, %                                    | D2868  | >95                                   | >95                                   | ≥95                                   | na                     | 42/75 <sup>2</sup>               | 31                         |
| Water Contact Angle   | Angle to Level                                     | 110                                   | 114                                   | 115                                   | na                     | 92                               | na                         |
| Water Absorption 24h,%                                      | D570   | <0.01                                 | <0.01                                 | <0.03                                 | <0.01                  | 0.03-0.05                        | 0.03                       |
| Weatherability  |  | Excellent                             | Excellent                             | Excellent                             | Excellent              | Excellent                        | Excellent                  |

\*General resin properties; Tubing properties may vary.

Working pressures are at 73°F (23°C). Pressure ratings are also effected by diameter of tubing and wall thickness. Actual performance may vary with different media and working conditions. Use this information for comparison only.

For detailed ordering information, please consult price list or contact Parker TexLoc®.

Parker Hannifin Corporation | Parflex® Division, TexLoc® | Fort Worth, Tx | [www.texloc.com](http://www.texloc.com)



F03

PFA  
Tubing  
A

FEP  
Tubing  
B

PTFE  
Tubing  
C

PVDF  
Tubing  
D

ETFE  
Tubing  
E

Technical  
Pages  
F

G Index

# Chemical Resistance Guide

## PTFE, FEP, PFA Chemical Resistance Guide

This chart is intended to be used as a general guide only. Since each pair of ratings listed is for ideal conditions, all factors affecting chemical resistance must be considered. **First letter of each pair applies to conditions at 68°F (20°C), the second to those at 122°F (50°C).**

| Chemical                   | LDPE | HDPE | PP/PA | PMP | FEP<br>PFA<br>PTFE | PC | PVC | PSF |
|----------------------------|------|------|-------|-----|--------------------|----|-----|-----|
| Acetaldehyde               | GN   | GF   | GN    | GN  | EE                 | FN | GN  | NN  |
| Acetamide, Sat.            | EE   | EE   | EE    | EE  | EE                 | NN | NN  | NN  |
| Acetic Acid, 5%            | EE   | EE   | EE    | EE  | EE                 | EG | EE  | EE  |
| Acetic Acid, 50%           | EE   | EE   | EE    | EE  | EE                 | EG | EG  | GG  |
| Acetone                    | EE   | EE   | EE    | EE  | EE                 | NN | NN  | NN  |
| Acetonitrile               | EE   | EE   | FN    | FN  | EE                 | NN | NN  | NN  |
| Acrylonitrile              | EE   | EE   | FN    | FN  | EE                 | NN | NN  | NN  |
| Adipic Acid                | EG   | EE   | EE    | EE  | EE                 | EE | GG  | EG  |
| Alanine                    | EE   | EE   | EE    | EE  | EE                 | NN | NN  | NN  |
| Allyl Alcohol              | EE   | EE   | EE    | EE  | EE                 | GF | GF  | GF  |
| Aluminum Hydroxide         | EG   | EE   | EG    | EG  | EE                 | FN | EG  | GG  |
| Aluminum Salts             | EE   | EE   | EE    | EE  | EE                 | EG | EE  | EE  |
| Amino Acids                | EE   | EE   | EE    | EE  | EE                 | EE | EE  | EE  |
| Ammonia                    | EE   | EE   | EE    | EE  | EE                 | NN | EG  | GF  |
| Ammonium Acetate, Sat.     | EE   | EE   | EE    | EE  | EE                 | EE | EE  | EE  |
| Ammonium Glycolate         | EG   | EE   | EG    | EG  | EE                 | GF | EE  | GG  |
| Ammonium Hydroxide, 5%     | EE   | EE   | EE    | EE  | EE                 | FN | EE  | GG  |
| Ammonium, Hydroxide, 30%   | EG   | EE   | EG    | EG  | EE                 | NN | EG  | GG  |
| Ammonium Oxalate           | EG   | EE   | EG    | EG  | EE                 | EE | EE  | EE  |
| Ammonium Salts             | EE   | EE   | EE    | EE  | EE                 | EG | EG  | EE  |
| n-Amyl Acetate             | GF   | EG   | GF    | GF  | EE                 | NN | NN  | NN  |
| Amyl Chloride              | NN   | FN   | NN    | NN  | EE                 | NN | NN  | NN  |
| Aniline                    | EG   | EG   | GF    | GF  | EE                 | FN | NN  | NN  |
| Benzaldehyde               | EG   | EE   | EG    | EG  | EE                 | FN | NN  | FF  |
| Benzene                    | FN   | GG   | GF    | GF  | EE                 | NN | NN  | NN  |
| Benzoic Acid, Sat.         | EE   | EE   | EG    | EG  | EE                 | EG | EG  | FF  |
| Benzyl Acetate             | EG   | EE   | EG    | EG  | EE                 | FN | NN  | NN  |
| Benzyl Alcohol             | NN   | FN   | NN    | NN  | EE                 | GF | GF  | NN  |
| Bromine                    | NN   | FN   | NN    | NN  | EE                 | FN | GN  | NN  |
| Bromobenzene               | NN   | FN   | NN    | NN  | EE                 | NN | NN  | NN  |
| Bromoform                  | NN   | NN   | NN    | NN  | EE                 | NN | NN  | NN  |
| Butadiene                  | NN   | FN   | NN    | NN  | EE                 | NN | FN  | NN  |
| n-Butyl Acetate            | GF   | EG   | GF    | GF  | EE                 | NN | NN  | NN  |
| n-Butyl Alcohol            | EE   | EE   | EE    | EG  | EE                 | GF | GF  | GF  |
| sec-Butyl Alcohol          | EG   | EE   | EG    | EG  | EE                 | GF | GG  | GF  |
| tert-Butyl Alcohol         | EG   | EE   | EG    | EG  | EE                 | GF | EG  | GF  |
| Butyric Acid               | NN   | FN   | NN    | NN  | EE                 | FN | GN  | GG  |
| Calcium Hydroxide, Conc.   | EE   | EE   | EE    | EE  | EE                 | NN | EE  | GG  |
| Calcium Hypochlorite, Sat. | EE   | EE   | EE    | EG  | EE                 | FN | GF  | EE  |
| Carbazole                  | EE   | EE   | EE    | EE  | EE                 | NN | NN  | NN  |
| Carbon Disulfide           | NN   | NN   | NN    | NN  | EE                 | NN | NN  | NN  |
| Carbon Tetrachloride       | FN   | GF   | GF    | NN  | EE                 | NN | GF  | NN  |
| Cedarwood Oil              | NN   | FN   | NN    | NN  | EE                 | GF | FN  | FF  |
| Cellosolve Acetate         | EG   | EE   | EG    | EG  | EE                 | FN | FN  | NN  |
| Chlorine, 10% in Air       | GN   | EF   | GN    | GN  | EE                 | EG | EE  | NN  |
| Chlorine, 10% (Moist)      | GN   | GF   | FN    | GN  | EE                 | GF | EG  | NN  |
| Chloroacetic Acid          | EE   | EE   | EG    | EG  | EE                 | FN | FN  | NN  |
| p-Chloroacetophenone       | EE   | EE   | EE    | EE  | EE                 | NN | NN  | NN  |
| Chloroform                 | FN   | GF   | GF    | NN  | EE                 | NN | NN  | NN  |
| Chromic Acid, 10%          | EE   | EE   | EE    | EE  | EE                 | GF | EG  | NN  |
| Chromic Acid, 50%          | EE   | EE   | GF    | GF  | EE                 | FN | EF  | NN  |
| Cinnamon Oil               | NN   | FN   | NN    | NN  | EE                 | GF | NN  | FF  |
| Citric Acid, 10%           | EE   | EE   | EE    | EE  | EE                 | EG | GG  | EE  |
| Cresol                     | NN   | FN   | GF    | NN  | EE                 | NN | NN  | NN  |
| Cyclohexane                | FN   | FN   | FN    | NN  | EE                 | EG | GF  | NN  |
| Decalin                    | GF   | EG   | GF    | FN  | EE                 | NN | EG  | NN  |
| o-Dichlorobenzene          | FN   | FF   | FN    | FN  | EE                 | NN | NN  | NN  |
| p-Dichlorobenzene          | FN   | GF   | GF    | GF  | EE                 | NN | NN  | NN  |
| Diethyl Benzene            | NN   | FN   | NN    | NN  | EE                 | FN | NN  | NN  |
| Diethyl Ether              | NN   | FN   | NN    | NN  | EE                 | NN | FN  | NN  |

LDPE = Low Density Polyethylene  
HDPE = High Density Polyethylene  
PP/PA = Polypropylene/Polyallomer  
PMP = Polymethylpentene

FEP  
PFA  
PTFE = Fluoroplastics / Fluoropolymers

PC = Polycarbonate  
PVDC = Polyvinylchloride  
PSF = Polysulfone

E = Excellent  
F = Fair  
G = Good  
N = Not recommended

# Chemical Resistance Guide (cont.)

## PTFE, FEP, PFA Chemical Resistance Guide

This chart is intended to be used as a general guide only. Since each pair of ratings listed is for ideal conditions, all factors affecting chemical resistance must be considered. **First letter of each pair applies to conditions at 68°F (20°C), the second to those at 122°F (50°C).**

| Chemical                      | LDPE | HDPE | PP/PA | PMP | FEP<br>PFA<br>PTFE | PC | PVC | PSF |
|-------------------------------|------|------|-------|-----|--------------------|----|-----|-----|
| Diethyl Ketone                | GF   | GG   | GG    | GF  | EE                 | NN | NN  | NN  |
| Diethyl Malonate              | EE   | EE   | EE    | EG  | EE                 | FN | GN  | FF  |
| Diethylene Glycol             | EE   | EE   | EE    | EE  | EE                 | GF | FN  | GG  |
| Diethylene Glycol Ethyl Ether | EE   | EE   | EE    | EE  | EE                 | FN | FN  | FF  |
| Dimethyl Formamide            | EE   | EE   | EE    | EE  | EE                 | NN | FN  | NN  |
| Dimethylsulfoxide             | EE   | EE   | EE    | EE  | EE                 | NN | NN  | NN  |
| 1,4-Dioxane                   | GF   | GG   | GF    | GF  | EE                 | GF | FN  | GF  |
| Dipropylene Glycol            | EE   | EE   | EE    | EE  | EE                 | GF | GF  | GG  |
| Ether                         | NN   | FN   | NN    | NN  | EE                 | NN | FN  | NN  |
| Ethyl Acetate                 | EE   | EE   | EE    | EG  | EE                 | NN | NN  | NN  |
| Ethyl Alcohol (absolute)      | EG   | EE   | EG    | EG  | EE                 | EG | EG  | EG  |
| Ethyl Alcohol, 40%            | EG   | EE   | EG    | EG  | EE                 | EG | EE  | EG  |
| Ethyl Benzene                 | FN   | GF   | FN    | FN  | EE                 | NN | NN  | NN  |
| Ethyl Benzoate                | FF   | GG   | GF    | GF  | EE                 | NN | NN  | NN  |
| Ethyl Butyrate                | GN   | GF   | GN    | FN  | EE                 | NN | NN  | NN  |
| Ethyl Chloride                | FN   | FF   | FN    | FN  | EE                 | NN | NN  | NN  |
| Ethyl Cyanoacetate            | EE   | EE   | EE    | EE  | EE                 | FN | FN  | FF  |
| Ethyl Lactate                 | EE   | EE   | EE    | EE  | EE                 | FN | FN  | FF  |
| Ethylene Chloride, Liquid     | GN   | GF   | FN    | NN  | EE                 | NN | NN  | NN  |
| Ethylene Glycol               | EE   | EE   | EE    | EE  | EE                 | GF | EE  | EE  |
| Ethylene Glycol Methyl Ether  | EE   | EE   | EE    | EE  | EE                 | FN | FN  | FF  |
| Ethylene Oxide                | FF   | GF   | FF    | FN  | EE                 | FN | FN  | EE  |
| Fluorides                     | EE   | EE   | EE    | EE  | EE                 | EE | EE  | EE  |
| Fluorine                      | FN   | GN   | FN    | FN  | EG                 | GF | EG  | NN  |
| Formaldehyde, 10%             | EE   | EE   | EE    | EG  | EE                 | EG | GF  | GF  |
| Formaldehyde, 40%             | EG   | EE   | EG    | EG  | EE                 | EG | GF  | GF  |
| Formic Acid, 3%               | EG   | EE   | EG    | EG  | EE                 | EG | GF  | GG  |
| Formic Acid, 50%              | EG   | EE   | EG    | EG  | EE                 | EG | GF  | GG  |
| Formic Acid, 98-100%          | EG   | EE   | EG    | EF  | EE                 | EF | FN  | FF  |
| Fuel Oil                      | FN   | GF   | EG    | GF  | EE                 | EG | EE  | EG  |
| Gasoline                      | FN   | GG   | GF    | GF  | EE                 | FF | GN  | FF  |
| Glacial Acetic Acid           | EG   | EE   | EG    | EG  | EE                 | NN | EG  | FN  |
| Glycerin                      | EE   | EE   | EE    | EE  | EE                 | EE | EE  | EE  |
| n-Heptane                     | FN   | GF   | FF    | FF  | EE                 | EG | GF  | EG  |
| Hexane                        | NN   | GF   | GF    | FN  | EE                 | FN | GN  | EG  |
| Hydrochloric Acid, 1-5%       | EE   | EE   | EE    | EG  | EE                 | EE | EE  | EE  |
| Hydrochloric Acid, 20%        | EE   | EE   | EE    | EG  | EE                 | GF | EG  | EE  |
| Hydrochloric Acid, 35%        | EE   | EE   | EG    | EG  | EE                 | NN | GF  | EE  |
| Hydrofluoric Acid, 4%         | EG   | EE   | EG    | EG  | EE                 | GF | GF  | GF  |
| Hydrofluoric Acid, 48%        | EE   | EE   | EE    | EE  | EE                 | NN | GF  | FN  |
| Hydrogen Peroxide, 3%         | EE   | EE   | EE    | EE  | EE                 | EE | EE  | EE  |
| Hydrogen Peroxide, 30%        | EG   | EE   | EG    | EG  | EE                 | EE | EE  | EE  |
| Hydrogen Peroxide, 90%        | EG   | EE   | EG    | EG  | EE                 | EE | EG  | EE  |
| Isobutyl Alcohol              | EE   | EE   | EE    | EG  | EE                 | EG | EG  | EG  |
| Isopropyl Acetate             | GF   | EG   | GF    | GF  | EE                 | NN | NN  | NN  |
| Isopropyl Alcohol             | EE   | EE   | EE    | EE  | EE                 | EE | EG  | EE  |
| Isopropyl Benzene             | FN   | GF   | FN    | NN  | EE                 | NN | NN  | NN  |
| Kerosene                      | FN   | GG   | GF    | GF  | EE                 | EE | EE  | GF  |
| Lactic Acid, 3%               | EG   | EE   | EG    | EG  | EE                 | EG | GF  | EE  |
| Lactic Acid, 85%              | EE   | EE   | EG    | EG  | EE                 | EG | GF  | EE  |
| Methoxyethyl Oleate           | EG   | EE   | EG    | EG  | EE                 | FN | NN  | NN  |
| Methyl Alcohol                | EE   | EE   | EE    | EE  | EE                 | GF | EF  | GF  |
| Methyl Ethyl Ketone           | EG   | EE   | EG    | NN  | EE                 | NN | NN  | NN  |
| Methyl Isobutyl Ketone        | GF   | EG   | GF    | FF  | EE                 | NN | NN  | NN  |
| Methyl Propyl Ketone          | GF   | EG   | GF    | FF  | EE                 | NN | NN  | NN  |
| Methylene Chloride            | FN   | GF   | FN    | FN  | EE                 | NN | NN  | NN  |
| Mineral Oil                   | GN   | EE   | EE    | EG  | EE                 | EG | EG  | EE  |
| Nitric Acid, 1-10%            | EE   | EE   | EE    | EE  | EE                 | EG | EG  | EF  |
| Nitric Acid, 50%              | GG   | GN   | FN    | GN  | EE                 | GF | GF  | GF  |
| Nitric Acid, 70%              | FN   | GN   | NN    | GF  | EE                 | NN | FN  | NN  |

For detailed ordering information, please consult price list or contact Parker TexLoc®.

# Chemical Resistance Guide (cont.)

## PTFE, FEP, PFA Chemical Resistance Guide

This chart is intended to be used as a general guide only. Since each pair of ratings listed is for ideal conditions, all factors affecting chemical resistance must be considered. **First letter of each pair applies to conditions at 68°F (20°C), the second to those at 122°F (50°C).**

| Chemical                      | LDPE | HDPE | PP/PA | PMP | FEP<br>PFA<br>PTFE | PC | PVC | PSF |
|-------------------------------|------|------|-------|-----|--------------------|----|-----|-----|
| Nitrobenzene                  | NN   | FN   | NN    | NN  | EE                 | NN | NN  | NN  |
| n-Octane                      | EE   | EE   | EE    | EE  | EE                 | GF | FN  | GF  |
| Orange Oil                    | FN   | GF   | GF    | FF  | EE                 | FF | FN  | FF  |
| Ozone                         | EG   | EE   | EG    | EE  | EE                 | EG | EG  | EE  |
| Perchloric Acid               | GN   | GN   | GN    | GN  | GF                 | NN | GN  | NN  |
| Perchloroethylene             | NN   | NN   | NN    | NN  | EE                 | NN | NN  | NN  |
| Phenol, Crystals              | GN   | GF   | GN    | FG  | EE                 | EN | FN  | FF  |
| Phosphoric Acid, 1-5%         | EE   | EE   | EE    | EE  | EE                 | EE | EE  | EE  |
| Phosphoric Acid, 85%          | EE   | EE   | EG    | EG  | EE                 | EE | EG  | EE  |
| Pine Oil                      | GN   | EG   | EG    | GF  | EE                 | GF | FN  | FF  |
| Potassium Hydroxide, 1%       | EE   | EE   | EE    | EE  | EE                 | FN | EE  | EE  |
| Potassium Hydroxide, Conc.    | EE   | EE   | EE    | EE  | EE                 | NN | EG  | EE  |
| Propane Gas                   | NN   | FN   | NN    | NN  | EE                 | FN | EG  | FF  |
| Propylene Glycol              | EE   | EE   | EE    | EE  | EE                 | GF | FN  | GG  |
| Propylene Oxide               | EG   | EE   | EG    | EG  | EE                 | GF | FN  | GG  |
| Resorcinol, Sat.              | EE   | EE   | EE    | EE  | EE                 | GF | FN  | NN  |
| Resorcinol, 5%                | EE   | EE   | EE    | EE  | EE                 | GF | GN  | NN  |
| Salicylaldehyde               | EG   | EE   | EG    | EG  | EE                 | GF | FN  | FF  |
| Salicylic Acid, Powder        | EE   | EE   | EE    | EG  | EE                 | EG | GF  | EE  |
| Salicylic Acid, Sat.          | EE   | EE   | EE    | EE  | EE                 | EG | GF  | EE  |
| Salt Solutions, Metallic      | EE   | EE   | EE    | EE  | EE                 | EE | EE  | EE  |
| Silver Acetate                | EE   | EE   | EE    | EE  | EE                 | EG | GG  | EE  |
| Silver Nitrate                | EG   | EE   | EG    | EE  | EE                 | EE | EG  | EE  |
| Sodium Acetate, Sat.          | EE   | EE   | EE    | EE  | EE                 | EG | GF  | EE  |
| Sodium Hydroxide, 1%          | EE   | EE   | EE    | EE  | EE                 | FN | EE  | EE  |
| Sodium Hydroxide, 50% to Sat. | GG   | EE   | EE    | EE  | EE                 | NN | NN  | EG  |
| Sodium Hypochlorite, 15%      | EE   | EE   | EE    | EE  | EE                 | GF | EE  | EE  |
| Stearic Acid, Crystals        | EE   | EE   | EE    | EE  | EE                 | EG | EG  | GG  |
| Sulfuric Acid, 1-6%           | EE   | EE   | EE    | EE  | EE                 | EE | EG  | EE  |
| Sulfuric Acid, 20%            | EE   | EE   | EG    | EG  | EE                 | EG | EG  | EE  |
| Sulfuric Acid, 60%            | EG   | EE   | EG    | EG  | EE                 | GF | EG  | EE  |
| Sulfuric Acid, 98%            | GG   | GG   | FN    | GG  | EE                 | NN | GN  | NN  |
| Sulfuric Dioxide, Liq., 46psi | NN   | FN   | NN    | NN  | EE                 | GN | FN  | GG  |
| Sulfuric Dioxide, wet or dry  | EE   | EE   | EE    | EE  | EE                 | EG | EG  | GG  |
| Sulfur Salts                  | FN   | GF   | FN    | FN  | EE                 | FN | NN  | GG  |
| Tartaric Acid                 | EE   | EE   | EE    | EE  | EE                 | EG | EG  | EE  |
| Tetrahydrofuran               | FN   | GF   | GF    | FF  | EE                 | NN | NN  | NN  |
| Thionyl Chloride              | NN   | NN   | NN    | NN  | EE                 | NN | NN  | NN  |
| Toluene                       | FN   | GG   | GF    | FF  | EE                 | FN | NN  | NN  |
| Tributyl Citrate              | GF   | EG   | GF    | GF  | EE                 | NN | FN  | FF  |
| Trichloroethane               | NN   | FN   | NN    | NN  | EE                 | NN | NN  | NN  |
| Trichloroethylene             | NN   | FN   | NN    | NN  | EE                 | NN | NN  | NN  |
| Triethylene Glycol            | EE   | EE   | EE    | EE  | EE                 | EG | GF  | EE  |
| Tripropylene Glycol           | EE   | EE   | EE    | EE  | EE                 | EG | GF  | EE  |
| Turpentine                    | FN   | GG   | GF    | FF  | EE                 | FN | GF  | NN  |
| Undecyl Alcohol               | EF   | EG   | EG    | EG  | EE                 | GF | EF  | FF  |
| Urea                          | EE   | EE   | EE    | EG  | EE                 | NN | GN  | NN  |
| Vinylidene Chloride           | NN   | FN   | NN    | NN  | EE                 | NN | NN  | NN  |
| Xylene                        | GN   | GF   | FN    | FN  | EE                 | NN | NN  | NN  |
| Zinc Stearate                 | EE   | EE   | EE    | EE  | EE                 | EE | EG  | EE  |

FEP  
PFA  
PTFE

= Fluoroplastics / Fluoropolymers

PC  
PVDC  
PSF

= Polycarbonate  
= Polyvinylchloride  
= Polysulfone

E  
F  
G  
N

= Excellent  
= Fair  
= Good  
= Not recommended

LDPE  
HDPE  
PP/PA  
PMP

= Low Density Polyethylene  
= High Density Polyethylene  
= Polypropylene/Polyallomer  
= Polymethylpentene



Parker Hannifin Corporation | Parflex® Division, TexLoc® | Fort Worth, Tx | [www.texloc.com](http://www.texloc.com)

# Parker Safety Guide

## Parker Safety Guide for Selecting and Using Hose, Tubing, Fittings, Connectors, Conductors, Valves and Related Accessories



### Parker Safety Guide for Selecting and Using Hose, Tubing, Fittings and Related Accessories

Publication No. 4400-B.1

Revised: October 2015, Rev A

**WARNING:** Failure or improper selection or improper use of hose, tubing, fittings, assemblies, valves, connectors, conductors or related accessories ("Products") can cause death, personal injury and property damage. Possible consequences of failure or improper selection or improper use of these Products include but are not limited to:

- Fittings thrown off at high speed.
- High velocity fluid discharge.
- Explosion or burning of the conveyed fluid.
- Electrocution from high voltage electric powerlines.
- Contact with suddenly moving or falling objects that are controlled by the conveyed fluid.
- Injections by high-pressure fluid discharge.

- Dangerously whipping Hose.
- Tube or pipe burst.
- Weld joint fracture.
- Contact with conveyed fluids that may be hot, cold, toxic or otherwise injurious.
- Sparking or explosion caused by static electricity buildup or other sources of electricity.
- Sparking or explosion while spraying paint or flammable liquids.
- Injuries resulting from inhalation, ingestion or exposure to fluids.

Before selecting or using any of these Products, it is important that you read and follow the instructions below. No product from any division in Parker Fluid Connectors Group is approved for in-flight aerospace applications. For hoses and fittings used in in-flight aerospace applications, please contact Parker Aerospace Group.

### 1.0 GENERAL INSTRUCTIONS

**1.1 Scope:** This safety guide provides instructions for selecting and using (including assembling, installing, and maintaining) these Products. For convenience, all rubber and/or thermoplastic products commonly called "hose" or "tubing" are called "Hose" in this safety guide. Metallic tube or pipe are called "tube". All assemblies made with Hose are called "Hose Assemblies". All assemblies made with Tube are called "Tube Assemblies".

All products commonly called "fittings", "couplings" or "adapters" are called "Fittings". Valves are fluid system components that control the passage of fluid. Related accessories are ancillary devices that enhance or monitor performance including crimping, flaring, flanging, presetting, bending, cutting, deburring, swaging machines, sensors, tags, lockout handles, spring guards and associated tooling. This safety guide is a supplement to and is to be used with the specific Parker publications for the specific Hose, Fittings and Related Accessories that are being considered for use. Parker publications are available at [www.parker.com](http://www.parker.com). SAE J1273 ([www.sae.org](http://www.sae.org)) and ISO 17165-2 ([www.ansi.org](http://www.ansi.org)) also provide recommended practices for hydraulic Hose Assemblies, and should be followed.

**1.2 Fail-Safe:** Hose, Hose Assemblies, Tube, Tube Assemblies and Fittings can and do fail without warning for many reasons. Design all systems and equipment in a fail-safe mode, so that failure of the Hose, Hose Assembly, Tube, Tube Assembly or Fitting will not endanger persons or property.

**1.3 Distribution:** Provide a copy of this safety guide to each person responsible for selecting or using Hose, Tube and Fitting products. Do not select or use Parker Hose, Tube or Fittings without thoroughly reading and understanding this safety guide as well as the specific Parker publications for the Products.

**1.4 User Responsibility:** Due to the wide variety of operating conditions and applications for Hose, Tube and Fittings. Parker does not represent or warrant that any particular Hose, Tube or Fitting is suitable for any specific end use system. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The user, through its own analysis and testing, is solely responsible for:

- Making the final selection of the Products.
- Assuring that the user's requirements are met and that the application presents no health or safety hazards.
- Following the safety guide for Related Accessories and being trained to operate Related Accessories.
- Providing all appropriate health and safety warnings on the equipment on which the Products are used.
- Assuring compliance with all applicable government and industry standards.

**1.5 Additional Questions:** Call the appropriate Parker technical service department if you have any questions or require any additional information.

See the Parker publication for the Products being considered or used, or call 1-800-CPARKER, or go to [www.parker.com](http://www.parker.com), for telephone numbers of the appropriate technical service department.

### 2.0 HOSE, TUBE & FITTINGS SELECTION INSTRUCTIONS

**2.1 Electrical Conductivity:** Certain applications require that the Hose be nonconductive to prevent electrical current flow. Other applications require the Hose and the Fittings and the Hose/Fitting interface to be sufficiently conductive to drain off static electricity. Extreme care must be exercised when selecting Hose, Tube and Fittings for these or any other applications in which electrical conductivity or nonconductivity is a factor.

The electrical conductivity or nonconductivity of Hose, Tube and Fittings is dependent upon many factors and may be susceptible to change. These factors include but are not limited to the various materials used to make the Hose and the Fittings, Fitting finish (some Fitting finishes are electrically conductive while others are nonconductive), manufacturing methods (including moisture control), how the Fittings contact the Hose, age and amount of deterioration or damage or other changes, moisture content of the Hose at any particular time, and other factors.

The following are considerations for electrically nonconductive and conductive Hose. For other applications consult the individual catalog pages and the appropriate industry or regulatory standards for proper selection.

**2.1.1 Electrically Nonconductive Hose:** Certain applications require that the Hose be nonconductive to prevent electrical current flow or to maintain electrical isolation. For applications that require Hose to be electrically nonconductive, including but not limited to applications near high voltage electric lines, only special nonconductive Hose can be used. The manufacturer of the equipment in which the nonconductive Hose is to be used must be consulted to be certain that the Hose, Tube and Fittings that are selected are proper for the application. Do not use any Parker Hose or Fittings for any such application requiring nonconductive Hose, including but not limited to applications near high voltage electric lines or dense magnetic fields, unless (i) the application is expressly approved in the Parker technical publication for the product, (ii) the Hose is marked "nonconductive", and (iii) the manufacturer of the equipment on which the Hose is to be used specifically approves the particular Parker Hose, Tube and Fittings for such use.

**2.1.2 Electrically Conductive Hose:** Parker manufactures special Hose for certain applications that require electrically conductive Hose. Parker manufactures special Hose for conveying paint in airless paint spraying applications. This Hose is labeled "Electrically Conductive Airless Paint Spray Hose" on its layline and packaging. This Hose must be properly connected to the appropriate Parker Fittings and properly grounded in order to dissipate dangerous static charge buildup, which occurs in all airless paint spraying applications. Do not use any other Hose for airless paint spraying, even if electrically conductive. Use of any other Hose or failure to properly connect the Hose can cause a fire or an explosion resulting in death, personal injury, and property damage. All hoses that convey fuels must be grounded.

Parker manufactures a special Hose for certain compressed natural gas ("CNG") applications where static electricity buildup may occur. Parker CNG Hose assemblies comply with the requirements of ANSI/IAS NGV 4.2; CSA 12.52, "Hoses for Natural Gas Vehicles and Dispensing Systems" ([www.ansi.org](http://www.ansi.org)). This Hose is labeled "Electrically Conductive for CNG Use"

# Safety Guide

on its layline and packaging. This Hose must be properly connected to the appropriate Parker Fittings and properly grounded in order to dissipate dangerous static charge buildup, which occurs in, for example, high velocity CNG dispensing or transfer. Do not use any other Hose for CNG applications where static charge buildup may occur, even if electrically conductive. Use of other Hoses in CNG applications or failure to properly connect or ground this Hose can cause a fire or an explosion resulting in death, personal injury, and property damage. Care must also be taken to protect against CNG permeation through the Hose wall. See section 2.6, Permeation, for more information.

Parker CNG Hose is intended for dispenser and vehicle use within the specified temperature range. Parker CNG Hose should not be used in confined spaces or unventilated areas or areas exceeding the specified temperature range. Final assemblies must be tested for leaks. CNG Hose Assemblies should be tested on a monthly basis for conductivity per ANSI/IAS NGV 4.2: CSA 12.52.

Parker manufactures special Hose for aerospace in-flight applications. Aerospace in-flight applications employing Hose to transmit fuel, lubricating fluids and hydraulic fluids require a special Hose with a conductive inner tube. This Hose for in-flight applications is available only from Parker's Stratoflex Products Division. Do not use any other Parker Hose for in-flight applications, even if electrically conductive. Use of other Hoses for in-flight applications or failure to properly connect or ground this Hose can cause a fire or an explosion resulting in death, personal injury and property damage. These Hose assemblies for in-flight applications must meet all applicable aerospace industry, aircraft engine and aircraft requirements.

**2.2 Pressure:** Hose, Tube and Fitting selection must be made so that the published maximum working pressure of the Hose, Tube and Fittings are equal to or greater than the maximum system pressure. The maximum working pressure of a Hose, or Tube Assembly is the lower of the respective published maximum working pressures of the Hose, Tube and the Fittings used. Surge pressures or peak transient pressures in the system must be below the published maximum working pressure for the Hose, Tube and Fitting. Surge pressures and peak pressures can usually only be determined by sensitive electrical instrumentation that measures and indicates pressures at millisecond intervals. Mechanical pressure gauges indicate only average pressures and cannot be used to determine surge pressures or peak transient pressures. Published burst pressure ratings for Hose is for manufacturing test purposes only and is no indication that the Product can be used in applications at the burst pressure or otherwise above the published maximum recommended working pressure.

**2.3 Suction:** Hoses used for suction applications must be selected to insure that the Hose will withstand the vacuum and pressure of the system. Improperly selected Hose may collapse in suction application.

**2.4 Temperature:** Be certain that fluid and ambient temperatures, both steady and transient, do not exceed the limitations of the Hose, Tube, Fitting and Seals. Temperatures below and above the recommended limit can degrade Hose, Tube, Fittings and Seals to a point where a failure may occur and release fluid. Tube and Fittings performances are normally degraded at elevated temperature. Material compatibility can also change at temperatures outside of the rated range. Properly insulate and protect the Hose Assembly when routing near hot objects (e.g. manifolds). Do not use any Hose in any application where failure of the Hose could result in the conveyed fluids (or vapors or mist from the conveyed fluids) contacting any open flame, molten metal, or other potential fire ignition source that could cause burning or explosion of the conveyed fluids or vapors.

**2.5 Fluid Compatibility:** Hose, and Tube Assembly selection must assure compatibility of the Hose tube, cover, reinforcement, Tube, Plating and Seals with the fluid media used. See the fluid compatibility chart in the Parker publication for the product being considered or used. This information is offered only as a guide. Actual service life can only be determined by the end user by testing under all extreme conditions and other analysis.

Hose, and Tube that is chemically compatible with a particular fluid must be assembled using Fittings and adapters containing likewise compatible seals. Flange or flare processes can change Tube material properties that may not be compatible with certain requirements such as NACE

**2.6 Permeation:** Permeation (that is, seepage through the Hose or Seal) will occur from inside the Hose or Fitting to outside when Hose or Fitting is used with gases, liquid and gas fuels, and refrigerants (including but not limited to such materials as helium, diesel fuel, gasoline, natural gas, or LPG). This permeation may result in high concentrations of vapors which are potentially flammable, explosive, or toxic, and in loss of fluid. Dangerous explosions, fires, and other hazards can result when using the wrong Hose for such applications. The system designer must take into account the fact that this permeation will take place and

must not use Hose or Fitting if this permeation could be hazardous. The system designer must take into account all legal, government, insurance, or any other special regulations which govern the use of fuels and refrigerants. Never use a Hose or Fitting even though the fluid compatibility is acceptable without considering the potential hazardous effects that can result from permeation through the Hose or Tube Assembly. Permeation of moisture from outside the Hose or Fitting to inside the Hose or Fitting will also occur in Hose or Tube assemblies, regardless of internal pressure. If this moisture permeation would have detrimental effects (particularly, but not limited to refrigeration and air conditioning systems), incorporation of sufficient drying capacity in the system or other appropriate system safeguards should be selected and used. The sudden pressure release of highly pressurized gas could also result in Explosive Decompression failure of permeated Seals and Hoses.

**2.7 Size:** Transmission of power by means of pressurized fluid varies with pressure and rate of flow. The size of the components must be adequate to keep pressure losses to a minimum and avoid damage due to heat generation or excessive fluid velocity.

**2.8 Routing:** Attention must be given to optimum routing to minimize inherent problems (kinking or flow restriction due to Hose collapse, twisting of the Hose, proximity to hot objects or heat sources). For additional routing recommendations see SAE J1273 and ISO 17165-2. Hose Assemblies have a finite life and should be installed in a manner that allows for ease of inspection and future replacement. Hose because of its relative short life, should not be used in residential and commercial buildings inside of inaccessible walls or floors, unless specifically allowed in the product literature. Always review all product literature for proper installation and routing instructions.

**2.9 Environment:** Care must be taken to insure that the Hose, Tube and Fittings are either compatible with or protected from the environment (that is, surrounding conditions) to which they are exposed. Environmental conditions including but not limited to ultraviolet radiation, sunlight, heat, ozone, moisture, water, salt water, chemicals and air pollutants can cause degradation and premature failure.

**2.10 Mechanical Loads:** External forces can significantly reduce Hose, Tube and Fitting life or cause failure. Mechanical loads which must be considered include excessive flexing, twist, kinking, tensile or side loads, bend radius, and vibration. Use of swivel type Fittings or adapters may be required to insure no twist is put into the Hose. Use of proper Hose or Tube clamps may also be required to reduce external mechanical loads. Unusual applications may require special testing prior to Hose selection.

**2.11 Physical Damage:** Care must be taken to protect Hose from wear, snagging, kinking, bending smaller than minimum bend radius and cutting, any of which can cause premature Hose failure. Any Hose that has been kinked or bent to a radius smaller than the minimum bend radius, and any Hose that has been cut or is cracked or is otherwise damaged should be removed and discarded. Fittings with damages such as scratches on sealing surfaces and deformation should be replaced.

**2.12 Proper End Fitting:** See instructions 3.2 through 3.5. These recommendations may be substantiated by testing to industry standards such as SAE J517 for hydraulic applications, or MIL-A-5070, AS1339, or AS3517 for Hoses from Parker's Stratoflex Products Division for aerospace applications.

**2.13 Length:** When determining the proper Hose or Tube length of an assembly, be aware of Hose length change due to pressure, Tube length change due to thermal expansion or contraction, and Hose or Tube and machine tolerances and movement must be considered. When routing short hose assemblies, it is recommended that the minimum free hose length is always used. Consult the hose manufacturer for their minimum free hose length recommendations. Hose assemblies should be installed in such a way that any motion or flexing occurs within the same plane.

**2.14 Specifications and Standards:** When selecting Hose, Tube and Fittings, government, industry, and Parker specifications and recommendations must be reviewed and followed as applicable.

**2.15 Hose Cleanliness:** Hose and Tube components may vary in cleanliness levels. Care must be taken to insure that the Hose and Tube Assembly selected has an adequate level of cleanliness for the application.

**2.16 Fire Resistant Fluids:** Some fire resistant fluids that are to be conveyed by Hose or Tube require use of the same type of Hose or Tube as used with petroleum base fluids. Some such fluids require a special Hose, Tube, Fitting and Seal, while a few fluids will not work with any Hose at all. See instructions 2.5 and 1.5. The wrong Hose, Tube, Fitting or Seal may fail after a very short service. In addition, all liquids but pure water may burn fiercely under certain conditions, and even pure water leakage may be hazardous.

2.17 Radiant Heat: Hose and Seals can be heated to destruction without contact by such nearby items as hot manifolds or molten metal. The same heat source may then initiate a fire. This can occur despite the presence of cool air around the Hose or Seal. Performance of Tube and Fitting subjected to the heat could be degraded.

2.18 Welding or Brazing: When using a torch or arc welder in close proximity to hydraulic lines, the hydraulic lines should be removed or shielded with appropriate fire resistant materials. Flame or weld spatter could burn through the Hose or Seal and possibly ignite escaping fluid resulting in a catastrophic failure. Heating of plated parts, including Hose Fittings and adapters, above 450°F (232°C) such as during welding, brazing or soldering may emit deadly gases. Any elastomer seal on fittings shall be removed prior to welding or brazing, any metallic surfaces shall be protected after brazing or welding when necessary. Welding and brazing filler material shall be compatible with the Tube and Fitting that are joined.

2.19 Atomic Radiation: Atomic radiation affects all materials used in Hose and Tube assemblies. Since the long-term effects may be unknown, do not expose Hose or Tube assemblies to atomic radiation. Nuclear applications may require special Tube and Fittings.

2.20 Aerospace Applications: The only Hose, Tube and Fittings that may be used for in-flight aerospace applications are those available from Parker's Stratoflex Products Division. Do not use any other Hose or Fittings for in-flight applications. Do not use any Hose or Fittings from Parker's Stratoflex Products Division with any other Hose or Fittings, unless expressly approved in writing by the engineering manager or chief engineer of Stratoflex Products Division and verified by the user's own testing and inspection to aerospace industry standards.

2.21 Unlocking Couplings: Ball locking couplings or other Fittings with quick disconnect ability can unintentionally disconnect if they are dragged over obstructions, or if the sleeve or other disconnect member, is bumped or moved enough to cause disconnect. Threaded Fittings should be considered where there is a potential for accidental uncoupling.

### 3.0 HOSE AND FITTINGS ASSEMBLY AND INSTALLATION INSTRUCTIONS

3.1 Component Inspection: Prior to assembly, a careful examination of the Hose and Fittings must be performed. All components must be checked for correct style, size, catalog number, and length. The Hose must be examined for cleanliness, obstructions, blisters, cover looseness, kinks, cracks, cuts or any other visible defects. Inspect the Fitting and sealing surfaces for burrs, nicks, corrosion or other imperfections. Do NOT use any component that displays any signs of nonconformance.

3.2 Hose and Fitting Assembly: Do not assemble a Parker Fitting on a Parker Hose that is not specifically listed by Parker for that Fitting, unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division. Do not assemble a Parker Fitting on another manufacturer's Hose or a Parker Hose on another manufacturer's Fitting unless (i) the engineering manager or chief engineer of the appropriate Parker division approves the Assembly in writing or that combination is expressly approved in the appropriate Parker literature for the specific Parker product, and (ii) the user verifies the Assembly and the application through analysis and testing. For Parker Hose that does not specify a Parker Fitting, the user is solely responsible for the selection of the proper Fitting and Hose Assembly procedures. See instruction 1.4.

To prevent the possibility of problems such as leakage at the Fitting or system contamination, it is important to completely remove all debris from the cutting operation before installation of the Fittings. The Parker published instructions must be followed for assembling the Fittings on the Hose. These instructions are provided in the Parker Fitting catalog for the specific Parker Fitting being used, or by calling 1-800-CPARKER, or at [www.parker.com](http://www.parker.com).

3.3 Related Accessories: Do not crimp or swage any Parker Hose or Fitting with anything but the listed swage or crimp machine and dies in accordance with Parker published instructions. Do not crimp or swage another manufacturer's Fitting with a Parker crimp or swage die unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division.

3.4 Parts: Do not use any Parker Fitting part (including but not limited to socket, shell, nipple, or insert) except with the correct Parker mating parts, in accordance with Parker published instructions, unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division.

3.5 Field Attachable/Permanent: Do not reuse any field attachable Hose Fitting that has blown or pulled off a Hose. Do not reuse a Parker permanent Hose Fitting (crimped or swaged) or any part thereof. Complete

Hose Assemblies may only be reused after proper inspection under section 4.0. Do not assemble Fittings to any previously used hydraulic Hose that was in service, for use in a fluid power application.

3.6 Pre-Installation Inspection: Prior to installation, a careful examination of the Hose Assembly must be performed. Inspect the Hose Assembly for any damage or defects. DO NOT use any Hose Assembly that displays any signs of nonconformance.

3.7 Minimum Bend Radius: Installation of a Hose at less than the minimum listed bend radius may significantly reduce the Hose life. Particular attention must be given to preclude sharp bending at the Hose to Fitting juncture. Any bending during installation at less than the minimum bend radius must be avoided. If any Hose is kinked during installation, the Hose must be discarded.

3.8 Twist Angle and Orientation: Hose Assembly installation must be such that relative motion of machine components does not produce twisting.

3.9 Securement: In many applications, it may be necessary to restrain, protect, or guide the Hose to protect it from damage by unnecessary flexing, pressure surges, and contact with other mechanical components. Care must be taken to insure such restraints do not introduce additional stress or wear points.

3.10 Proper Connection of Ports: Proper physical installation of the Hose Assembly requires a correctly installed port connection insuring that no twist or torque is transferred to the Hose when the Fittings are being tightened or otherwise during use.

3.11 External Damage: Proper installation is not complete without insuring that tensile loads, side loads, kinking, flattening, potential abrasion, thread damage or damage to sealing surfaces are corrected or eliminated. See instruction 2.10.

3.12 System Checkout: All air entrapment must be eliminated and the system pressurized to the maximum system pressure (at or below the Hose maximum working pressure) and checked for proper function and freedom from leaks. Personnel must stay out of potential hazardous areas while testing and using.

3.13 Routing: The Hose Assembly should be routed in such a manner so if a failure does occur, the escaping media will not cause personal injury or property damage. In addition, if fluid media comes in contact with hot surfaces, open flame or sparks, a fire or explosion may occur. See section 2.4.

3.14 Ground Fault Equipment Protection Devices (GFEEDs): WARNING! Fire and Shock Hazard. To minimize the danger of fire if the heating cable of a Multitube bundle is damaged or improperly installed, use a Ground Fault Equipment Protection Device. Electrical fault currents may be insufficient to trip a conventional circuit breaker.

For ground fault protection, the IEEE 515: ([www.ansi.org](http://www.ansi.org)) standard for heating cables recommends the use of GFEEDs with a nominal 30 milliampere trip level for "piping systems in classified areas, those areas requiring a high degree of maintenance, or which may be exposed to physical abuse or corrosive atmospheres".

### 4.0 TUBE AND FITTINGS ASSEMBLY AND INSTALLATION INSTRUCTIONS

4.1 Component Inspection: Prior to assembly, a careful examination of the Tube and Fittings must be performed. All components must be checked for correct style, size, material, seal, and length. Inspect the Fitting and sealing surfaces for burrs, nicks, corrosion, missing seal or other imperfections. Do NOT use any component that displays any signs of nonconformance.

4.2 Tube and Fitting Assembly: Do not assemble a Parker Fitting with a Tube that is not specifically listed by Parker for that Fitting, unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division. The Tube must meet the requirements specified to the Fitting. The Parker published instructions must be followed for assembling the Fittings to a Tube. These instructions are provided in the Parker Fitting catalog for the specific Parker Fitting being used, or by calling 1-800-CPARKER, or at [www.parker.com](http://www.parker.com).

4.3 Related Accessories: Do not preset or flange Parker Fitting components using another manufacturer's equipment or procedures unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division. Tube, Fitting component and tooling must be checked for correct style, size and material. Operation and maintenance of Related Accessories must be in accordance with the operation manual for the designated Accessory.

4.4 Securement: In many applications, it may be necessary to restrain, protect, or guide the Tube to protect it from damage by unnecessary flexing, pressure surges, vibration, and contact with other mechanical components. Care must be taken to insure such restraints do not introduce additional stress or wear points.

|                      |   |  |
|----------------------|---|--|
| Intro                | <p>4.5 Proper Connection of Ports: Proper physical installation of the Tube Assembly requires a correctly installed port connection insuring that no torque is transferred to the Tube when the Fittings are being tightened or otherwise during use.</p> <p>4.6 External Damage: Proper installation is not complete without insuring that tensile loads, side loads, flattening, potential abrasion, thread damage or damage to sealing surfaces are corrected or eliminated. See instruction 2.10.</p> <p>4.7 System Checkout: All air entrapment must be eliminated and the system pressurized to the maximum system pressure (at or below the Tube Assembly maximum working pressure) and checked for proper function and freedom from leaks. Personnel must stay out of potential hazardous areas while testing and using.</p> <p>4.8 Routing: The Tube Assembly should be routed in such a manner so if a failure does occur, the escaping media will not cause personal injury or property damage. In addition, if fluid media comes in contact with hot surfaces, open flame or sparks, a fire or explosion may occur. See section 2.4.</p>  | <p>possibly loss of limb. Even seemingly minor hydraulic fluid injection injuries must be treated immediately by a physician with knowledge of the tissue damaging properties of hydraulic fluid.</p> <p>If a Hose failure occurs, immediately shut down the equipment and leave the area until pressure has been completely released from the Hose Assembly. Simply shutting down the hydraulic pump may or may not eliminate the pressure in the Hose Assembly. Many times check valves, etc., are employed in a system and can cause pressure to remain in a Hose Assembly even when pumps or equipment are not operating. Tiny holes in the Hose, commonly known as pinholes, can eject small, dangerously powerful but hard to see streams of hydraulic fluid. It may take several minutes or even hours for the pressure to be relieved so that the Hose Assembly may be examined safely.</p> <p>Once the pressure has been reduced to zero, the Hose Assembly may be taken off the equipment and examined. It must always be replaced if a failure has occurred. Never attempt to patch or repair a Hose Assembly that has failed. Consult the nearest Parker distributor or the appropriate Parker division for Hose Assembly replacement information. .</p> <p>Never touch or examine a failed Hose Assembly unless it is obvious that the Hose no longer contains fluid under pressure. The high pressure fluid is extremely dangerous and can cause serious and potentially fatal injury.</p> |
| PFA Tubing<br>A      | <p>5.0 HOSE AND FITTING MAINTENANCE AND REPLACEMENT INSTRUCTIONS</p> <p>5.1 Even with proper selection and installation, Hose life may be significantly reduced without a continuing maintenance program. The severity of the application, risk potential from a possible Hose failure, and experience with any Hose failures in the application or in similar applications should determine the frequency of the inspection and the replacement for the Products so that Products are replaced before any failure occurs. Certain products require maintenance and inspection per industry requirements. Failure to adhere to these requirements may lead to premature failure. A maintenance program must be established and followed by the user and, at minimum, must include instructions 5.2 through 5.7</p> <p>5.2 Visual Inspection Hose/Fitting: Any of the following conditions require immediate shut down and replacement of the Hose Assembly:</p> <ul style="list-style-type: none"> <li>• Fitting slippage on Hose;</li> <li>• Damaged, cracked, cut or abraded cover (any reinforcement exposed);</li> <li>• Hard, stiff, heat cracked, or charred Hose;</li> <li>• Cracked, damaged, or badly corroded Fittings;</li> <li>• Leaks at Fitting or in Hose;</li> <li>• Kinked, crushed, flattened or twisted Hose; and</li> <li>• Blistered, soft, degraded, or loose cover.</li> </ul> <p>5.3 Visual Inspection All Other: The following items must be tightened, repaired, corrected or replaced as required:</p> <ul style="list-style-type: none"> <li>• Leaking port conditions;</li> <li>• Excess dirt buildup;/</li> <li>• Worn clamps, guards or shields; and</li> <li>• System fluid level, fluid type, and any air entrapment.</li> </ul> <p>5.4 Functional Test: Operate the system at maximum operating pressure and check for possible malfunctions and leaks. Personnel must avoid potential hazardous areas while testing and using the system. See section 2.2.</p> <p>5.5 Replacement Intervals: Hose assemblies and elastomeric seals used on Hose Fittings and adapters will eventually age, harden, wear and deteriorate under thermal cycling and compression set. Hose Assemblies and elastomeric seals should be inspected and replaced at specific replacement intervals, based on previous service life, government or industry recommendations, or when failures could result in unacceptable downtime, damage, or injury risk. See section 1.2. Hose and Fittings may be subjected to internal mechanical and/or chemical wear from the conveying fluid and may fail without warning. The user must determine the product life under such circumstances by testing. Also see section 2.5.</p> <p>5.6 Hose Inspection and Failure: Hydraulic power is accomplished by utilizing high pressure fluids to transfer energy and do work. Hoses, Fittings and Hose Assemblies all contribute to this by transmitting fluids at high pressures. Fluids under pressure can be dangerous and potentially lethal and, therefore, extreme caution must be exercised when working with fluids under pressure and handling the Hoses transporting the fluids. From time to time, Hose Assemblies will fail if they are not replaced at proper time intervals. Usually these failures are the result of some form of misapplication, abuse, wear or failure to perform proper maintenance. When Hoses fail, generally the high pressure fluids inside escape in a stream which may or may not be visible to the user. Under no circumstances should the user attempt to locate the leak by "feeling" with their hands or any other part of their body. High pressure fluids can and will penetrate the skin and cause severe tissue damage and</p> | <p>5.7 Elastomeric seals: Elastomeric seals will eventually age, harden, wear and deteriorate under thermal cycling and compression set. Elastomeric seals should be inspected and replaced.</p> <p>5.8 Refrigerant gases: Special care should be taken when working with refrigeration systems. Sudden escape of refrigerant gases can cause blindness if the escaping gases contact the eye and can cause freezing or other severe injuries if it contacts any other portion of the body.</p> <p>5.9 Compressed natural gas (CNG): Parker CNG Hose Assemblies should be tested after installation and before use, and at least on a monthly basis per instructions provided on the Hose Assembly tag. The recommended procedure is to pressurize the Hose and check for leaks and to visually inspect the Hose for damage and to perform an electrical resistance test.</p> <p>Caution: Matches, candles, open flame or other sources of ignition shall not be used for Hose inspection. Leak check solutions should be rinsed off after use.</p>  |
| PEEP Tubing<br>B     |   | <p><b>6.0 HOSE STORAGE</b></p> <p>6.1 Age Control: Hose and Hose Assemblies must be stored in a manner that facilitates age control and first-in and first-out usage based on manufacturing date of the Hose and Hose Assemblies. Unless otherwise specified by the manufacturer or defined by local laws and regulations:</p> <p>6.1.1 The shelf life of rubber hose in bulk form or hose made from two or more materials is 28 quarters (7 years) from the date of manufacture, with an extension of 12 quarters (3 years), if stored in accordance with ISO 2230;</p> <p>6.1.2 The shelf life of thermoplastic and polytetrafluoroethylene hose is considered to be unlimited;</p> <p>6.1.3 Hose assemblies that pass visual inspection and proof test shall not be stored for longer than 2 years.</p> <p>6.1.4 Storage: Stored Hose and Hose Assemblies must not be subjected to damage that could reduce their expected service life and must be placed in a cool, dark and dry area with the ends capped. Stored Hose and Hose Assemblies must not be exposed to temperature extremes, ozone, oils, corrosive liquids or fumes, solvents, high humidity, rodents, insects, ultraviolet light, electromagnetic fields or radioactive materials.</p>  |
| PTFE Tubing<br>C     |   |  |
| PVDF Tubing<br>D     |   |  |
| ETFE Tubing<br>E     |   |  |
| Technical Pages<br>F |   |  |
| Index<br>G           |   |  |



# Offer of Sale

**The items described in this document and other documents or descriptions provided by Parker Hannifin Corporation, as subsidiaries and its authorized distributors are hereby offered for sale at prices to be established by Parker Hannifin Corporation, its subsidiaries and its authorized distributors. This offer and its acceptance by any customer ("Buyer") shall be governed by all of the following Terms and Conditions. Buyer's order for any such item, when communicated to Parker Hannifin Corporation, its subsidiary or an authorized distributor ("Seller") verbally or in writing, shall constitute acceptance of this offer.**

1. **Terms and Conditions of Sale:** All descriptions, quotations, proposals, offers, acknowledgments, acceptances and sales of Seller's products are subject to and shall be governed exclusively by the terms and conditions stated herein. Buyer's acceptance of any offer to sell is limited to these terms and conditions. Any terms or conditions in addition to, or inconsistent with those stated herein, proposed by Buyer in any acceptance of an offer by Seller, are hereby objected to. No such additional, different or inconsistent terms and conditions shall become part of the contract between Buyer and Seller unless expressly accepted in writing by Seller. Seller's acceptance of any offer to purchase by Buyer is expressly conditional upon Buyer's assent to all the terms and conditions stated herein, including any terms in addition to, or inconsistent with those contained in Buyer's offer. Acceptance of Seller's products shall in all events constitute such assent.
2. **Payment:** Payment shall be made by Buyer net 30 days from the date of delivery of the items purchased hereunder. Any claims by Buyer for omissions or shortages in a shipment shall be waived unless Seller receives notice thereof within 30 days after Buyer's receipt of the shipment.
3. **Delivery:** Unless otherwise provided on the face hereof, delivery shall be made F.O.B. Seller's plant. Regardless of the method of delivery, however, risk of loss shall pass to Buyer upon Seller's delivery to a carrier. Any delivery dates shown are approximate only and Seller shall have no liability for any delays in delivery.
4. **Warranty:** Seller warrants that the items sold thereunder shall be free from defects in material or workmanship for a period of 365 days from the date of shipment to Buyer, or 2,000 hours of use, whichever expires first. THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO ITEMS PROVIDED HEREUNDER. SELLER MAKES NO OTHER WARRANTY, GAURANTEE, OR REPRESENTATION OF ANY KIND WHATSOEVER. ALL OTHER WARRANTIES, INCLUDING BUT NOT LIMITED TO, MERCHANTABILITY AND FITNESS FOR PURPOSE, WHETHER EXPRESS, IMPLIED, OR ARISING BY OPERATION OF LAW, TRADE USAGE, OR COURSE OF DEALING ARE HEREBY DISCLAIMED. NOTWITHSTANDING THE FOREGOING, THERE ARE NO WARRANTIES WHATSOEVER ON ITEMS BUILT OR ACQUIRED WHOLELY OR PARTIALLY, TO BUYER'S DESIGNS OR SPECIFICATIONS.
5. **Limitation Of Remedy:** SELLER'S LIABILITY ARISING FROM OR IN ANY WAY CONNECTED WITH THE ITEMS SOLD OR THIS CONTRACT SHALL BE LIMITED EXCLUSIVELY TO REPAIR OR REPLACEMENT OF THE ITEMS SOLD OR REFUND OF THE PURCHASE PRICE PAID BY BUYER, AT SELLER'S SOLE OPTION. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES OF ANY KIND OR NATURE WHATSOEVER, INCLUDING BUT NOT LIMITED TO LOST PROFITS ARISING FROM OR IN ANY WAY CONNECTED WITH THIS AGREEMENT OR ITEMS SOLD HEREUNDER, WHETHER ALLEGED TO ARISE FROM BREACH OF CONTRACT, EXPRESS OR IMPLIED WARRANTY, OR IN TORT, INCLUDING WITHOUT LIMITATION, NEGLIGENCE, FAILURE TO WARN OR STRICT LIABILITY.
6. **Changes, Reschedules and Cancellations:** Buyer may request to modify the designs or specifications for the items sold hereunder as well as the quantities and delivery dates thereof, or may request to cancel all or part of this order, however, no such requested modification or cancellation shall become part of the contract between Buyer and Seller unless accepted by Seller in a written amendment to this Agreement. Acceptance of any such requested modification or cancellation shall be at Seller's discretion, and shall be upon such terms and conditions as Seller may require.
7. **Special Tooling:** A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture items sold pursuant to this contract. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by

Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the items sold hereunder, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller shall have the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

8. **Buyer's Property:** Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, may be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer placing an order for the items which are manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.
9. **Taxes:** Unless otherwise indicated on the face hereof, all prices and charges are exclusive of excise, sales, use, property, occupational or like taxes which may be imposed by any taxing authority upon the manufacture, sale or delivery of the items sold hereunder. If any such taxes must be paid by Seller of if Seller is liable for the collection of such tax, the amount thereof shall be in addition to the amounts for the items sold. Buyer agrees to pay all such taxes or to reimburse Seller therefore upon receipt of its invoice. If Buyer claims exemption from any sales, use or other tax imposed by any taxing authority, Buyer shall save Seller harmless from and against any such tax, together with any interest or penalties thereon which may be assessed if the items are held to be taxable.
10. **Indemnity For Infringement of Intellectual Property Rights:** Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Part 10. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets (hereinafter "Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that an item sold pursuant to this contract infringes in the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If an item sold hereunder is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and options, procure for Buyer the right to continue using said item, replace or modify said item so as to make it noninfringing, or offer to accept return of said item and return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to items delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any item sold hereunder. The foregoing provisions of this Part 10 shall constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.  
If a claim is based on information provided by Buyer or if the design for an item delivered hereunder is specified in whole or in part by Buyer, Buyer shall defend and indemnify Seller for all costs, expenses or judgments resulting from any claim that such item infringes any patent, trademark, copyright, trade dress, trade secret or any similar right.
11. **Force Majeure:** Seller does not assume the risk of and shall not be liable for delay or failure to perform any of Seller's obligations by reason of circumstances beyond the reasonable control of Seller (hereinafter "Events of Force Majeure"). Events of Force Majeure shall include without limitation, accidents, acts of God, strikes or labor disputes, acts, laws, rules or regulations of any government or government agency, fires, floods, delays or failures in delivery of carriers or suppliers, shortages of materials and any other cause beyond Seller's control.
12. **Entire Agreement/Governing Law:** The terms and conditions set forth herein, together with any amendments, modifications and any different terms or conditions expressly accepted by Seller in writing, shall constitute the entire Agreement concerning the items sold, and there are no oral or other representations or agreements which pertain thereto. This Agreement shall be governed in all respects by the law of the State of Ohio. No actions arising out of the sale of the items sold hereunder or this Agreement may be brought by either party more than two (2) years after the cause of action accrues.

5/14

|                                |  |
|--------------------------------|--|
| Intro                          |  |
| PFA<br>Tubing<br><b>A</b>      |  |
| FEP<br>Tubing<br><b>B</b>      |  |
| PTFE<br>Tubing<br><b>C</b>     |  |
| PVDF<br>Tubing<br><b>D</b>     |  |
| ETFE<br>Tubing<br><b>E</b>     |  |
| Technical<br>Pages<br><b>F</b> |  |
| Index<br><b>G</b>              |  |



# Parker's Motion & Control Product Groups

**At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 1 800 C-Parker (1 800 272 7537).**



## Aerospace

### Key Markets

Aftermarket services  
Commercial transports  
Engines  
General & business aviation  
Helicopters  
Launch vehicles  
Military aircraft  
Missiles  
Power generation  
Regional transports  
Unmanned aerial vehicles

### Key Products

Control systems & actuation products  
Engine systems & components  
Fluid conveyance systems & components  
Fluid metering, delivery & atomization devices  
Fuel systems & components  
Fuel tank inerting systems  
Hydraulic systems & components  
Thermal management  
Wheels & brakes



## Automation

### Key Markets

Alternative energy  
Conveyor & material handling  
Factory automation  
Food & beverage  
Life sciences & medical  
Machine tools  
Packaging machinery  
Paper machinery  
Plastics machinery  
Primary metals  
Safety & security  
Semiconductor & electronics  
Transportation & automotive

### Key Products

AC/DC drives & systems  
Air preparation  
Electric actuators, gantry robots & slides  
Human machine interfaces  
Inverters  
Manifolds  
Miniature fluidics  
Pneumatic actuators & grippers  
Pneumatic valves & controls  
Rotary actuators  
Stepper motors, servo motors, drives & controls  
Structural extrusions  
Vacuum generators, cups & sensors



## Climate & Industrial Controls

### Key Markets

Agriculture  
Air conditioning  
Construction Machinery  
Food & beverage  
Industrial machinery  
Life sciences  
Oil & gas  
Precision cooling  
Process  
Refrigeration  
Transportation

### Key Products

Accumulators  
Advanced actuators  
CO<sub>2</sub> controls  
Electronic controllers  
Filter driers  
Hand shut-off valves  
Heat exchangers  
Hose & fittings  
Pressure regulating valves  
Refrigerant distributors  
Safety relief valves  
Smart pumps  
Solenoid valves  
Thermostatic expansion valves



## Filtration

### Key Markets

Aerospace  
Food & beverage  
Industrial plant & equipment  
Life sciences  
Marine  
Mobile equipment  
Oil & gas  
Power generation & renewable energy  
Process  
Transportation  
Water Purification

### Key Products

Analytical gas generators  
Compressed air filters & dryers  
Engine air, coolant, fuel & oil filtration systems  
Fluid condition monitoring systems  
Hydraulic & lubrication filters  
Hydrogen, nitrogen & zero air generators  
Instrumentation filters  
Membrane & fiber filters  
Microfiltration  
Sterile air filtration  
Water desalination & purification filters & systems



## Fluid Connectors

### Key Markets

Aerial lift  
Agriculture  
Bulk chemical handling  
Construction machinery  
Food & beverage  
Fuel & gas delivery  
Industrial machinery  
Life sciences  
Marine  
Mining  
Mobile  
Oil & gas  
Renewable energy  
Transportation

### Key Products

Check valves  
Connectors for low pressure fluid conveyance  
Deep sea umbilicals  
Diagnostic equipment  
Hose couplings  
Industrial hose  
Mooring systems & power cables  
PTFE hose & tubing  
Quick couplings  
Rubber & thermoplastic hose  
Tube fittings & adapters  
Tubing & plastic fittings



## Hydraulics

### Key Markets

Aerial lift  
Agriculture  
Alternative energy  
Construction machinery  
Forestry  
Industrial machinery  
Machine tools  
Marine  
Material handling  
Mining  
Oil & gas  
Power generation  
Refuse vehicles  
Renewable energy  
Truck hydraulics  
Turf equipment

### Key Products

Accumulators  
Cartridge valves  
Electrohydraulic actuators  
Human machine interfaces  
Hybrid drives  
Hydraulic cylinders  
Hydraulic motors & pumps  
Hydraulic systems  
Hydraulic valves & controls  
Hydrostatic steering  
Integrated hydraulic circuits  
Power take-offs  
Power units  
Rotary actuators  
Sensors



## Instrumentation

### Key Markets

Alternative fuels  
Biopharmaceuticals  
Chemical & refining  
Food & beverage  
Marine & shipbuilding  
Medical & dental  
Microelectronics  
Nuclear Power  
Offshore oil exploration  
Oil & gas  
Pharmaceuticals  
Power generation  
Pulp & paper  
Steel  
Water/wastewater

### Key Products

Analytical Instruments  
Analytical sample conditioning products & systems  
Chemical injection fittings & valves  
Fluoropolymer chemical delivery fittings, valves & pumps  
High purity gas delivery fittings, valves, regulators & digital flow controllers  
Industrial mass flow meters/ controllers  
Permanent no-weld tube fittings  
Precision industrial regulators & flow controllers  
Process control double block & bleeds  
Process control fittings, valves, regulators & manifold valves



## Seals

### Key Markets

Aerospace  
Chemical processing  
Consumer  
Fluid power  
General industrial  
Information technology  
Life sciences  
Microelectronics  
Military  
Oil & gas  
Power generation  
Renewable energy  
Telecommunications  
Transportation

### Key Products

Dynamic seals  
Elastomeric o-rings  
Electro-medical instrument design & assembly  
EMI shielding  
Extruded & precision-cut, fabricated elastomeric seals  
High temperature metal seals  
Homogeneous & inserted elastomeric shapes  
Medical device fabrication & assembly  
Metal & plastic retained composite seals  
Shielded optical windows  
Silicone tubing & extrusions  
Thermal management  
Vibration dampening



ENGINEERING YOUR SUCCESS.

# Parker Fluid Connectors Group

## North American Divisions & Distribution Service Centers

**Your complete source** for quality tube fittings, hose & hose fittings, brass & composite fittings, quick-disconnect couplings, valves and assembly tools, locally available from a worldwide network of authorized distributors.

### **Fittings:**

Available in inch and metric sizes covering SAE, BSP, DIN, GAZ, JIS and ISO thread configurations, manufactured from steel, stainless steel, brass, aluminum, nylon and thermoplastic.

### **Hose, Tubing and Bundles:**

Available in a wide variety of sizes and materials including rubber, wire-reinforced, thermoplastic, hybrid and custom compounds.

### **Worldwide Availability:**

Parker operates Fluid Connectors manufacturing locations and sales offices throughout North America, South America, Europe and Asia-Pacific.

**For information,** call toll free...

**1-800-C-PARKER  
(1-800-272-7537)**

## **North American Divisions**

### **Fluid System Connectors Division**

Otsego, MI  
phone 269 694 9411  
fax 269 694 4614

### **Hose Products Division**

Wickliffe, OH  
phone 440 943 5700  
fax 440 943 3129

### **Industrial Hose Division**

Wickliffe, OH  
phone 440 883 2120  
fax 440 833 2230

### **Parflex Division**

Ravenna, OH  
phone 330 296 2871  
fax 330 296 8433

### **Quick Coupling Division**

Minneapolis, MN  
phone 763 544 7781  
fax 763 544 3418

### **Tube Fittings Division**

Columbus, OH  
phone 614 279 7070  
fax 614 279 7685

## **Distribution Service Centers**

### **Buena Park, CA**

phone 714 522 8840  
fax 714 994 1183

### **Conyers, GA**

phone 770 929 0330  
fax 770 929 0230

### **Louisville, KY**

phone 502 937 1322  
fax 502 937 4180

### **Portland, OR**

phone 503 283 1020  
fax 503 283 2201

### **Toledo, OH**

phone 419 878 7000  
fax 419 878 7001  
fax 419 878 7420  
(FCG Kit Operations)

### **Canada**

#### **Grimsby, ONT**

phone 905 945 2274  
fax 905 945 3945  
(Contact Grimsby for other Service Center locations.)

### **Mexico**

#### **Toluca, MEX**

phone (52) 722 2754 200  
fax (52) 722 2722 168

Parker Hannifin Corporation  
**Parflex Division/TexLoc®**  
4700 Lone Star Blvd.  
Fort Worth, TX 76106  
phone 817.625.5081 800.423.6551  
fax 817.624.9095 800.438.9562  
email: [texlocquote@parker.com](mailto:texlocquote@parker.com)

