



EDUCTOR

NOZZLES, VENTURI AGITATION



ELECTROPLATING



PRINTED CIRCUIT BOARD (PCB)



METAL FINISHING



ACID PICKLING



CHEMICAL ETCHING



ALUMINIUM ANODIZING



SALTS DISSOLUTION



MIXING - HOMOGENEOUS SOLUTION



EDUCTOR NOZZLES

VENTURI AGITATION



WORKING PRINCIPLE

The Siebec agitation system with eductor nozzle uses the Venturi principle in order to amplify the volume of liquid delivered by a pump.

Each eductor nozzle can deliver up to 5 times the volume of liquid pumped

Continuous solution movement is more efficient than air agitation and enables an homogeneous solution.

Eductor nozzles allow better fluid circulation in the tank which enables an enhanced control over the quality of depositon.

Venturi agitation delivers uniform bath temperature.



THE ESSENTIAL ROLE OF AGITATION SYSTEMS



AVANTAGES

Prevents laminating

Avoids stagnation in the tank and disperses products and reagents

Dissipate the heat

Dissipate the heat from the cathode/ electrolyte interface.

Reduction of turbulences

Increases the deposition factor from 1 to 10

Venturi principle

Multiplies by 5 the volume of liquid pumped

Optimizes deposition properties

Porosity, hardness, resistant to wear and tear



MATÉRIAUX

Molded in one piece

In polypropylene, PVDF or Stainless steel



APPLICATIONS

Suitable for most applications

Electroplating, degreasing, cleaning, pickling, pre-treatment, paint stripping, anodizing, homogenous solution, mixing, chemical make up



OPTION

Eductor nozzle carrier

Easy installation, reinforced rigidity



EDUCTOR NOZZLES

ADVANTAGES

ELECTROPLATING / PRINTED CIRCUIT PLATING

Nickel - Copper - Zinc - Chrome - Gold - Silver & many other chemicals processes



90 % LESS TOXIC FUMES

Reduced need for extraction and washing of gases to conform to standards



HOMOGENEIZATION

Bath is more homogeneous in both temperature and concentration, in a way that is superior to air or mechanical agitation



ENHANCED CONDUCTIVITY

Reduction of electrical resistance thanks to the absence of air, preventing the loss of conductivity in the solution.



HEATING SAVINGS

Savings on the energy needed to heat the bath (air is responsible for about 25% of energetic losses) thanks to heat losses almost null because of the absence of emanations



IMPROVED WORKING ENVIRONMENT

Reduction of risks for operators and the surroundings

ALUMINUM ANODIZATION



LESS DEFECTS

No external air added which enables a better control over the process.
No carbon dioxide dissolution from air = no air bubble retention in the hollow pieces + no formation of carbonates



REDUCED COOLING COSTS

Thanks to a uniform distribution of the temperature

METAL FINISHING

Alkaline cleaners - Phosphate tank - Paint stripper



LESS FILTRATION

Preservation of brighteners and components of the bath.
Reduces the consumption of plating additives and sludge production



LESS CLEANING

Reduction of equipments and infrastructures corrosion by eliminating air borne particles (unlike air agitation). Less cleaning needed around the tanks and electrical equipments

EDUCTOR NOZZLES

VENTURI AGITATION



A GOOD AGITATION IS LINKED TO THE FLOW VELOCITY GRADIENT AT THE EDUCTOR NOZZLE OUTLET

An efficient flow field for agitation in critical areas is defined by the minimum flow velocity going from 0,25 to 0,3 m/s depending on the application.
Mechanical agitation only reaches 0,15 m/s


PERFORMANCES

Eductor model	Flow rate	INLET PRESSURE (bar)								
		0.6	0.8	1	1.2	1.3	1.4	1.5	2	2.5
1/4"	Inlet airflow (m³/h)	0.75	0.85	0.94	1.03	1.07	1.1	1.18	-	-
	Outlet airflow (m³/h)	3.95	4.44	4.9	5.36	5.6	5.73	6.15	-	-
	Efficient flow field @ 0.33 m/s (m)	1.22	1.27	1.38	1.49	1.35	1.57	1.72	-	-
	Efficient flow field @ 0.25 m/s (m)	1.47	1.60	1.74	1.89	1.96	2.02	2.17	-	-
3/8"	Inlet airflow (m³/h)	1.30	1.74	1.8	2.0	2.07	2.14	2.2	2.55	2.77
	Outlet airflow (m³/h)	6.73	8.97	9.3	10.4	10.7	11.0	11.1	13.1	14.3
	Efficient flow field @ 0.33 m/s (m)	1.59	1.95	2.1	2.29	2.35	2.41	2.5	2.8	2.9
	Efficient flow field @ 0.25 m/s (m)	1.94	2.39	2.6	2.81	2.90	2.98	3.1	3.5	3.6
3/4"	Inlet airflow (m³/h)	2.71	3.42	3.6	3.95	4.11	4.26	4.4	5.1	5.6
	Outlet airflow (m³/h)	12.1	15.1	15.5	17.5	18.2	18.9	19.8	22.3	24.9
	Efficient flow field @ 0.33 m/s (m)	1.76	2.15	2.2	2.44	2.52	2.59	2.65	3	3.4
	Efficient flow field @ 0.25 m/s (m)	2.26	2.77	2.88	3.14	3.25	3.36	3.5	4	4.6

Simulation conditions : eductor nozzles in 20°C - 1cP water

Values vary depending on the characteristics of the bath and pressure losses of the system.

FLOW VELOCITY GRADIENT («FEATHER»)

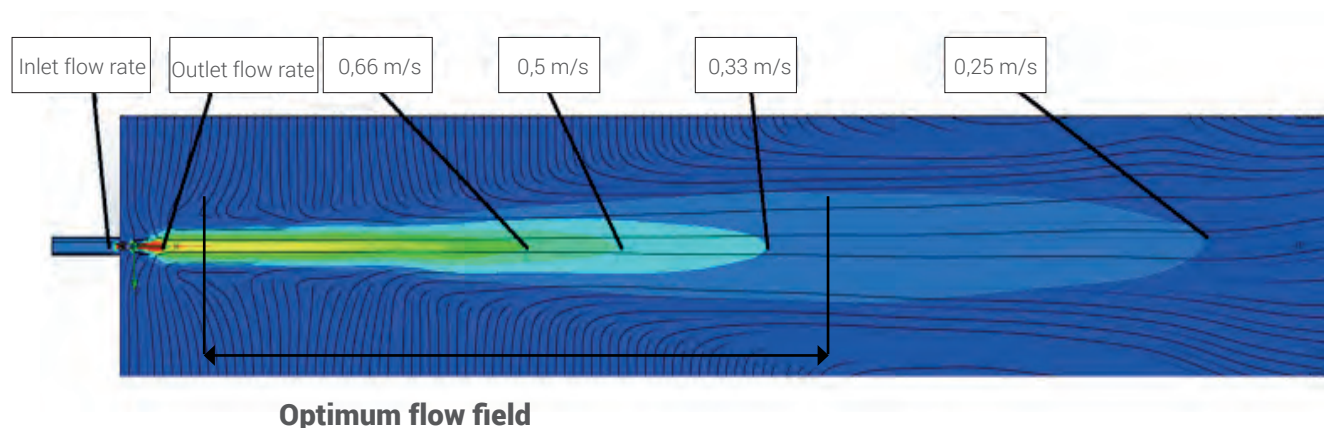



EDUCTOR NOZZLES

VENTURI AGITATION

HOW TO CALCULATE AN EDUCTOR NOZZLE SYSTEM PROPERLY ?

1

THE NUMBER OF EDUCTOR NOZZLES

The number of eductor nozzles is determined by the total length of the tank and the typical recommended spacing between eductors according to the table at the bottom of the page.

2

THE SIZE OF EDUCTOR NOZZLES

The size of eductor nozzles is determined by the size of the tank and the space available. Tanks under 300L are often equipped with 1/4" eductor nozzles

Larger tanks are usually equipped with 3/8" eductor nozzles and deep tanks can be equipped with 3/4" eductor nozzles.

3

PIPING DESIGN

The design of the manifold must ensure good movement of solution within the bath and prevent direct impingement when electroplating. Stripping or cleaning applications can handle stronger turbulences directed at the product being treated.

4

SIZE OF THE PUMP


The size of the pump is calculated depending on the number and size of the selected eductor nozzles, the depth of the tank, as well as the piping.

5


EDUCTOR CARRIER

Siebec designed PVC, PP, PVDF eductor carrier in order to ease the mounting of eductors on the manifold while enhancing the rigidity of the connection.

No need to tap the manifold, you can insert the carrier simply by drilling. The carrier is then welded by seam or socket

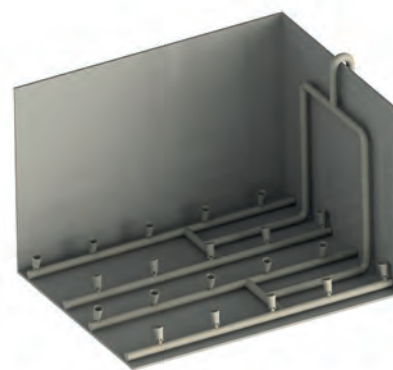


H LAYOUT

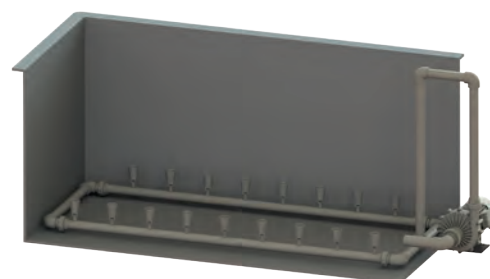

O LAYOUT


Modelling of eductor nozzles layout in a treatment bath

Eductor size	Recommended center distance (mm)
1/4"	200
3/8"	300
3/4"	400

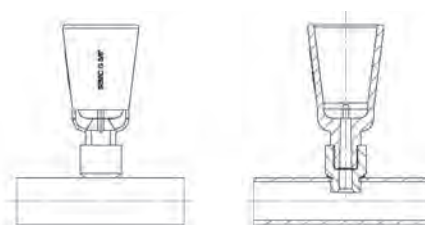



EDUCTOR NOZZLES

VENTURI AGITATION

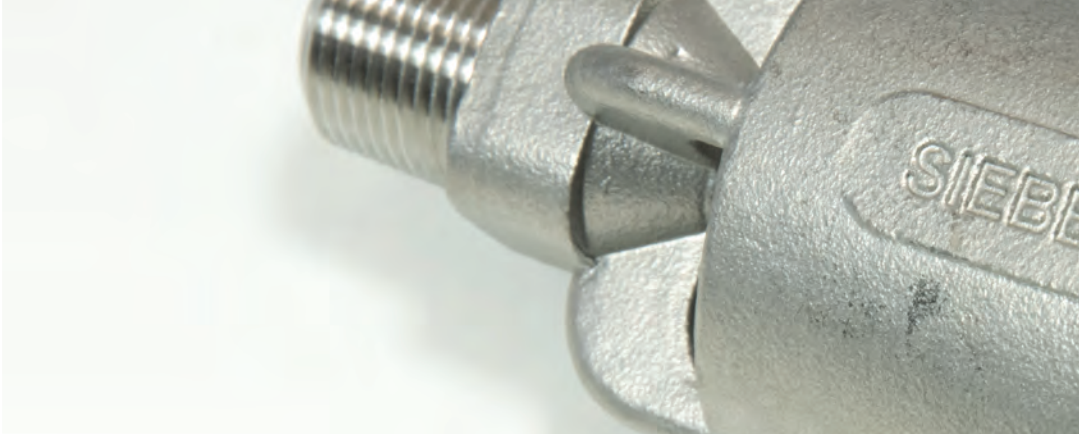

OPTIMIZATION OF YOUR AGITATION SYSTEM

SIEBEC can help you in the calculation of the number and size of the eductor nozzles and design the installation of your agitation system. Our flow simulation software allows us to reach an optimized agitation in your tank.

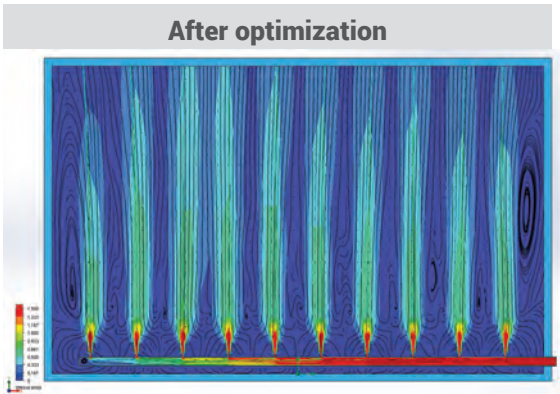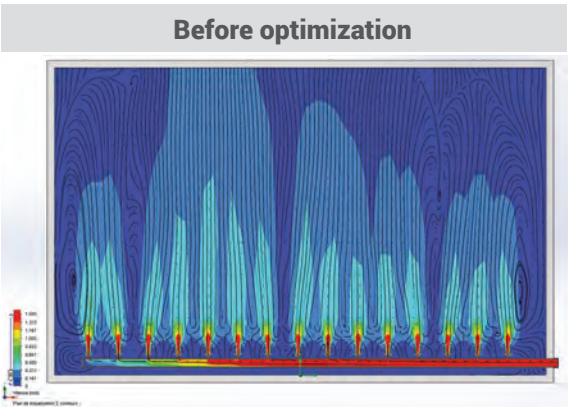


SIEBEC pump M390 | Height of the tank : 2 m | Eductor nozzle : 3/8"


EXAMPLE : SIMULATION OF SAVINGS

comparison between an air agitated system and Venturi agitation

Tank volume	Bath temperature	Air temperature	Power absorbed Venturi agitation	Power absorbed Air agitation
5m³	60°C	20°C	12 kW	15 kW

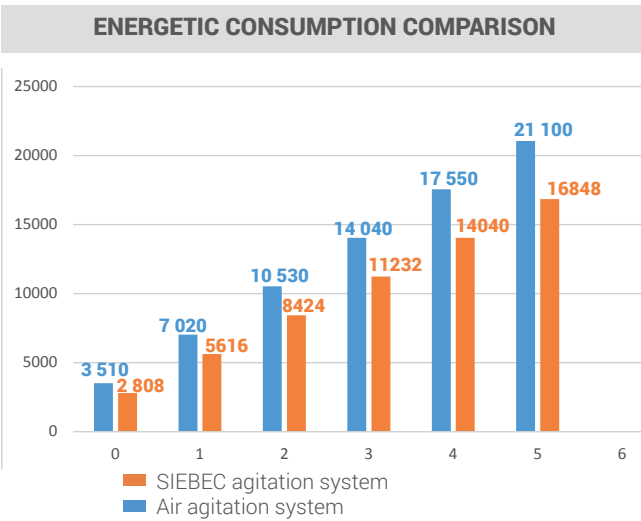

-24 % EVAPORATION

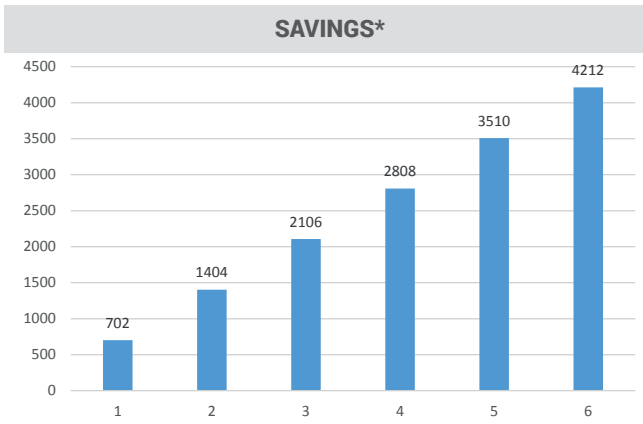

*calculated on a basis of 52 weeks of 5 days (260 days), 10 h per day, 0.09€/ kWh

20 % SAVINGS*






EDUCTOR NOZZLES

VENTURI AGITATION

FLOOR SPACE, DIMENSIONS, MATERIALS


MODELE	MATERIAL*			DIMENSION (mm)			FLOW RATE (m³/h)
Ø D thread (Inch)	PP	PVDF	Stainless steel	Thread length L	Thread length P	Ø Outlet A	Outlet airflow
1/4"	•	•		72	11	26	3.1 to 6.15
3/8"	•	•	•	100	16	53	6.35 to 14.3
3/4"	•	•		144.5	20	71.3	11 to 27.45

* Polypropylene (Max temperature of the fluid: 80°C) - PVDF (Max temperature of the fluid: 110°C).

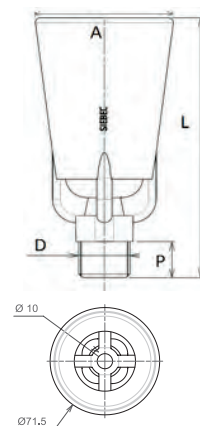

EDUCTOR CARRIER SIZE

	L	D	d
1/4"	24	20	15
3/8"	32	28	20
3/4"	41	35	25

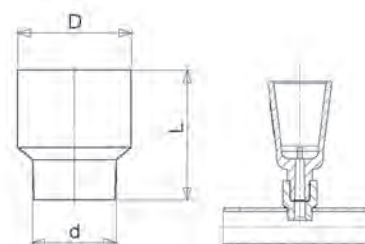

PUMPS FOR EDUCTOR NOZZLE AGITATION SYSTEM

MODELES	ENGINE POWER (kW)	MAX FLOW RATE (m³/h)	MAX TOTAL HEAD (m)
Magnetic drive pumps			
M200	1.1	20	19
M250	1.5	25	19
M290	2.2	29	21.5
M390	4.0	40	23
Mechanical seal pumps			
A27	2.2	30	25
A30	4	48	25
A31	5.5	52	32
A32	7.5	57	50
Vertical pumps (SIEBEC) – outside of tank or immersed			
T202	1.5	18	17
T242	1.5	23.5	17
T262HD	3	29	18.5
Vertical pumps (Bohncke GmbH) – immersed			
S17	3.0	25	32.5
S18	4.0	40	32.5

MAGNETIC DRIVE PUMPS
MECHANICAL SEAL PUMPS
VERTICAL PUMPS



SIEBEC - A30



SIEBEC - M390



BOHNCKE - S18


To know the complete specifications (alternative constructions, air flow charts, dimensions, etc.)

CONTACT US !



SIEBEC GROUP

FLUID FILTRATION, PURIFICATION, TRANSFER

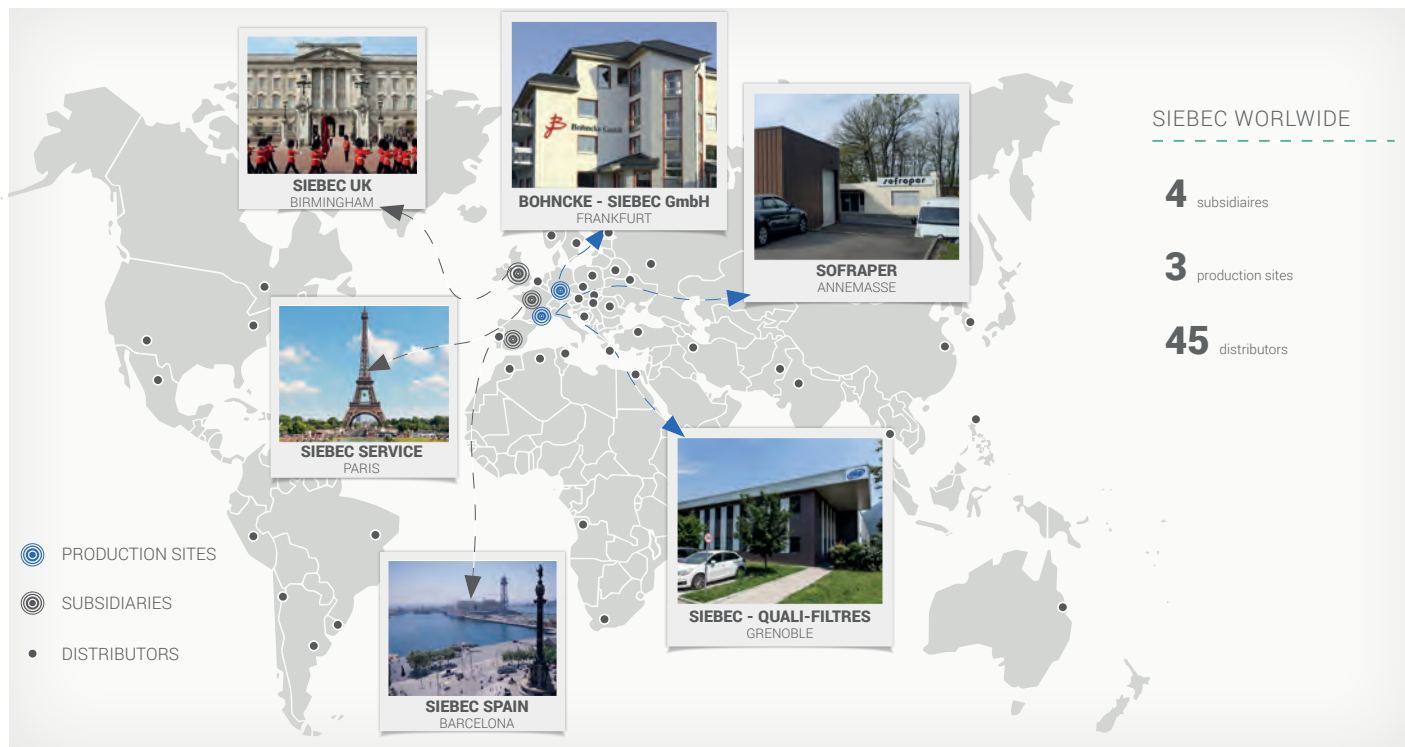

SIEBEC SAS

ZAC Vence Ecoparc
9 rue des platanes
38120 Saint-Egrève
France

Tel : +33 4 76 26 12 09
Fax : +33 4 76 27 04 82
contact@siebec.com

QUALI-FILTRES SAS

ZAC Vence Ecoparc
9 rue des platanes
38120 Saint-Egrève
France

Tel : +33 4 76 26 91 75
Fax : +33 4 76 26 91 74
contact@quali-filtres.com

BOHNCKE GmbH

Auf der Langwies 8
65510 Hünstetten-Wallbach
Deutschland

Tel : +49 6126 9384-0
Fax : +49 6126 9384-75
info@bohnccke.de

SOFRAPER SAS

15 chemin des Bois
74 100 Ville La Grand
France

Tel : +33 4 50 84 22 53
Fax : +33 4 50 84 22 59
contact@sofraper.com

SIEBEC UK LTD

Unit 3 St. Alban's Business Park
St. Alban's Rd
Stafford ST16 3DR
England

Tel. : +44 1 785 227 700
Fax : +44 1 785 246 006
sales@siebec.co.uk

P.G SIEBEC SL

Enric Morera, 14 4º
08950 Esplugues de Llobregat
España

Tel: +34 933 722 024
Fax : +34 902 030 650
ventas@siebec.com

SIEBEC GmbH

Auf der Langwies 8
65510 Hünstetten-Wallbach
Deutschland

Tel : +49 6126 9384-19
Fax : +49 6126 9384-75
info.de@siebec.com

SIEBEC SERVICE SARL

5 rue du Valengelier BAT 7
77500 Chelles
France

Tel. : +33 1 82 35 01 11
Fax : +33 1 60 20 23 14
contact@siebec.com